


REV.	SPECIFICATION	ECN NO.	APPD.

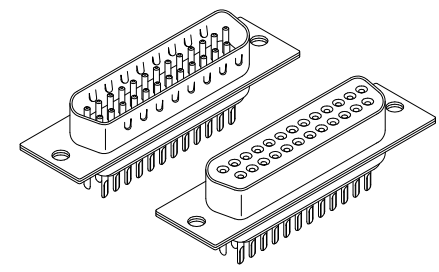

Material:

Housing: Thermoplastic Polyester Glass Filled UL94V-0.

Contacts: Copper Alloy.

Shell: Metal.

Electrical Characteristics:

Current Rating: 1 AMP.

Dielectric Withstanding Voltage: AC 1000V For 1 minute.


Insulator Resistance: 1000M Ωmin. at DC 500V.

Contact Resistance: 20mΩ max.at DC 100mA.






Operating Temperature: -55°C~+105°C.

***RoHS Compliant**

Male

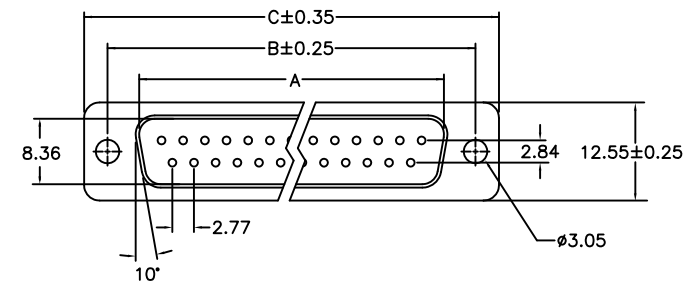

Female

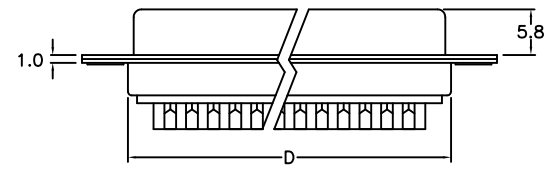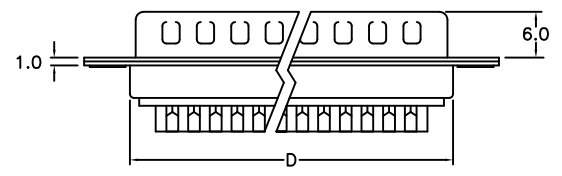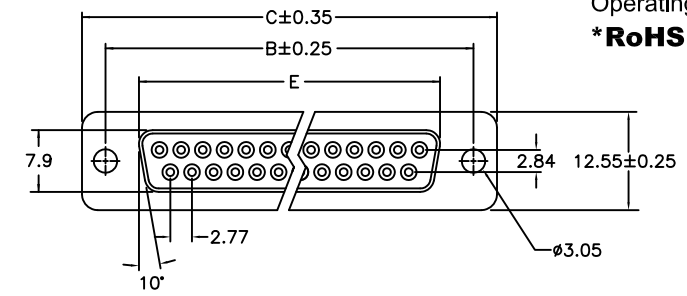

7907-
Series

xx
Position

M
M: Male
F: Female

T
T: Tin Shell

B
B: Black
U: Blue
W: White

C
C: Selective Gold
Plated
G: Gold Plated

00
00: G/F

A
A: Tray
Package

Position	Dimension				
	A	B	C	D	E
9	16.92	24.99	30.81	19.28	16.33
15	25.25	33.32	39.14	27.51	24.66
25	38.96	47.04	53.04	41.30	38.38
37	55.42	63.50	69.32	57.40	54.84

Tolerances	Dwg. No.	7907D03001		Title:	
x = ±0.5	Projection	⊕ ◁		7907 Series D-SUB Solder Cup Type	
.x = ±0.25	Unit	mm	Scale		1:1
.xx = ±0.15	Drawn By	Peggy 10/16'15			

0767

OUPIN
OUPIN ELECTRONIC(KUNSHAN) CO., LTD.
P/N: 7907-xxMTBC00A&7907-xxFTBC00A

SHEET	1/1	Ver.No.	A6
-------	-----	---------	----