
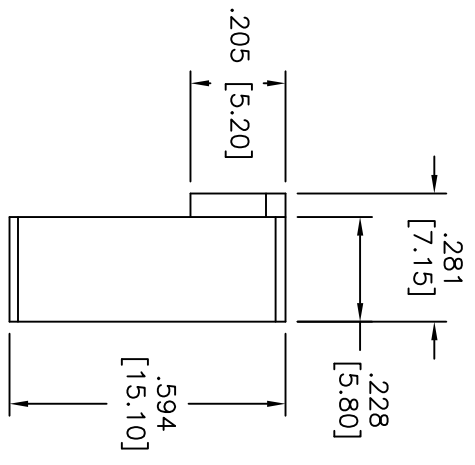
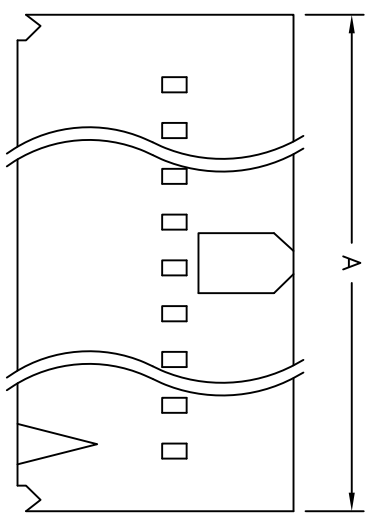


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/31/10	

APPROVED: _____
 DATE: _____ TITLE: _____

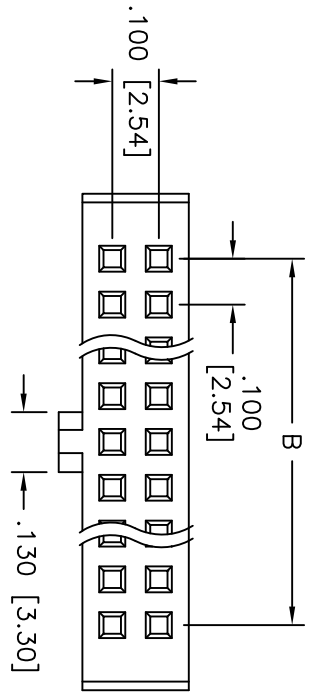

SPECIFICATIONS:

Material: Insulator: PBT, rated UL 94V-0
 Electrical: Operating voltage: 250 VAC max
 Current rating: 3 Amps max.
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 800 VAC for 1 minute
 Mechanical: Temperature Rating: Operating temperature: -25°C to +85°C
 Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.

Poles: 6 thru 72
 A = .100 [2.54] X No. of Spaces + .281 [7.14]
 B = .100 [2.54] X No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE MM [INCHES]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710



APPROVALS	DATE
DRAWN DY	8/31/10
CHECKED	
APPROVED	

TITLE	.100 [2.54] CRIMP TERMINAL HOUSING	
SIZE	PART NO.	MTFA-XX
REF:	S0072T	SCALE: NTS
REV.		SHEET 1 OF 1

6 5 4 3 2 1