

ETMM SERIES

(2,00 mm) .0787"

SHROUDED STRAIN RELIEF IDC HEADER

SPECIFICATIONS


For complete specifications see www.samtec.com?ETMM

Insulator Material:
Black Liquid Crystal Polymer
Terminal Material:
Phosphor Bronze
Plating:
Sn or Au over 50µ" (1,27 µm) Ni
Operating Temp Range:
-55°C to +125°C
RoHS Compliant:
Yes

Processing:
Lead-Free Solderable:
Yes
SMT Lead Coplanarity:
(0,13 mm) .005" max
RoHS Compliant:
Yes

Mates with:
TCSD, TCMD

Shrouded pins for protection

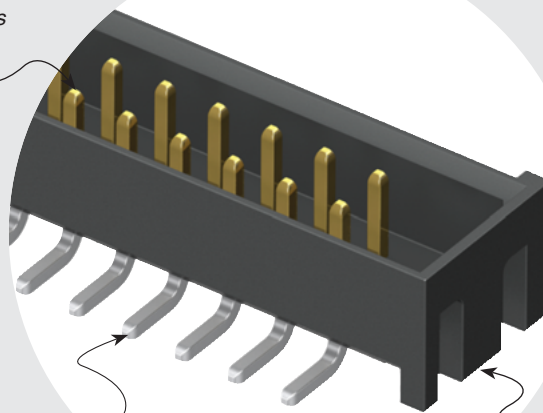

Surface Mount, Through-hole and Right Angle

Optional Locking clips

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality



ETMM
= Mates with TCSD and TCMD with Strain Relief

05, 08, 10, 12, 13, 15, 17, 20, 22, 25
(Standard sizes)

-F
= Gold Flash on post, Matte Tin on tail
-L
= 10µ" (0,25 µm) Gold on post, Matte Tin on tail

-TH
= Through-hole
-RA
= Right Angle
-SM
= Surface Mount



-“XX”
= Polarized Position
-LC
= Locking Clip (Not available for -RA) (Manual placement required)
-TR
= Tape & Reel Packaging (-SM only)
-K
= (7,50 mm) .295" DIA Polyimide Film Pick & Place Pad (-SM only)

OTHER SOLUTIONS

- TCSD mates without Strain Relief. See STMM Series
- Shrouded header for mating with Connector Strips. See LTMM Series

ALSO AVAILABLE (MOQ Required)

- Other sizes Contact Samtec.

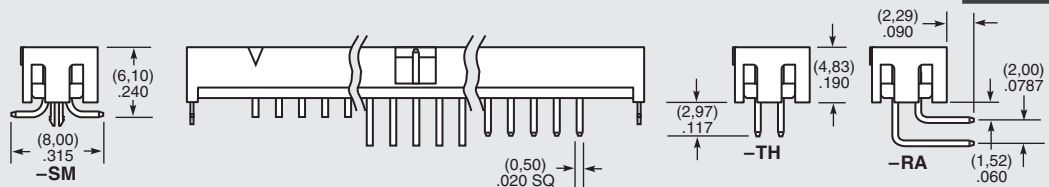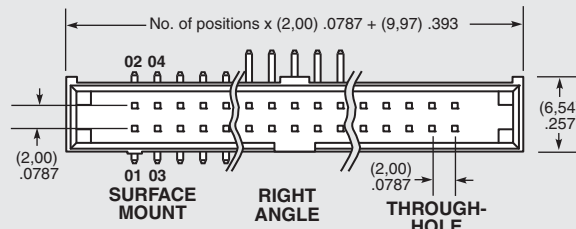

Note: Some lengths, styles and options are non-standard, non-returnable.