
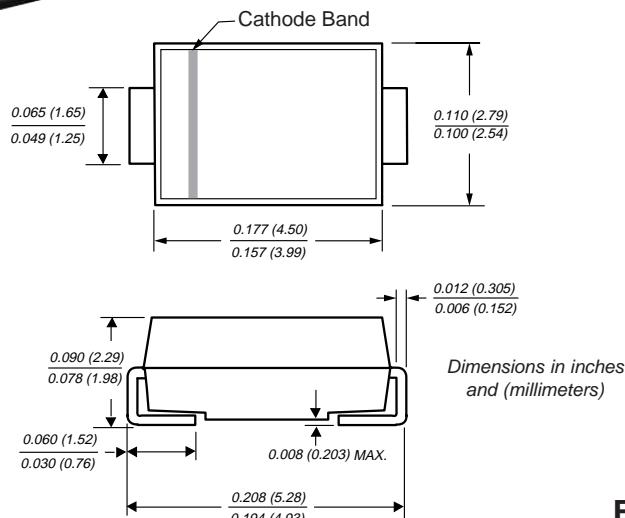


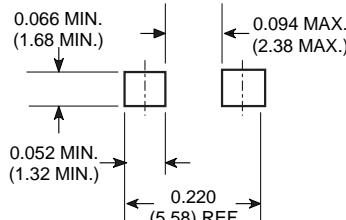

Surface Mount Fast Switching Rectifier

DO-214AC (SMA)

 Reverse Voltage 50 to 800V
 Forward Current 1.0A

Mounting Pad Layout



Mechanical Data

Case: JEDEC DO-214AC molded plastic over glass passivated chip

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Weight: 0.002 oz., 0.064 g

Packaging codes/options:

2Q/7.5K per 13" Reel (12mm Tape)

2P/1.8K per 7" Reel (12mm Tape)

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- Low profile surface mount package
- Built-in strain relief
- Fast switching for high efficiency
- Glass passivated chip junction
- High temperature soldering: 250°C/10 seconds at terminals

Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbols	RS1A	RS1B	RS1D	RS1G	RS1J	RS1K	Units
Device marking code		RA	RB	RD	RG	RJ	RK	
Maximum repetitive peak reverse voltage	V _{RRM}	50	100	200	400	600	800	V
Maximum RMS voltage	V _{VRMS}	35	70	140	280	420	500	V
Maximum DC blocking voltage	V _{VDC}	50	100	200	400	600	800	V
Maximum average forward rectified current at T _L =90°C	I _{F(AV)}	1.0					A	
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) T _L =90°C	I _{FSM}	30					A	
Typical thermal resistance ⁽¹⁾	R _{θJA} R _{θJL}	105 32					°C/W	
Operating junction and storage temperature range	T _J , T _{STG}	-55 to +150					°C	

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Maximum instantaneous forward voltage at 1.0A	V _F	1.30			V
Maximum DC reverse current T _A =25°C at rated DC blocking voltage T _A =125°C	I _R	5.0 50			μA
Maximum reverse recovery time at I _F =0.5A, I _R =1.0A, I _{rr} =0.25A	t _{rr}	150			ns
Typical junction capacitance at 4.0V, 1MHz	C _J	10		7.0	pF

Note: (1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. with 0.2 x 0.2" (5.0 x 5.0mm) copper pad area

RS1A thru RS1K



Vishay Semiconductors
formerly General Semiconductor

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig. 1 — Forward Current Derating Curve

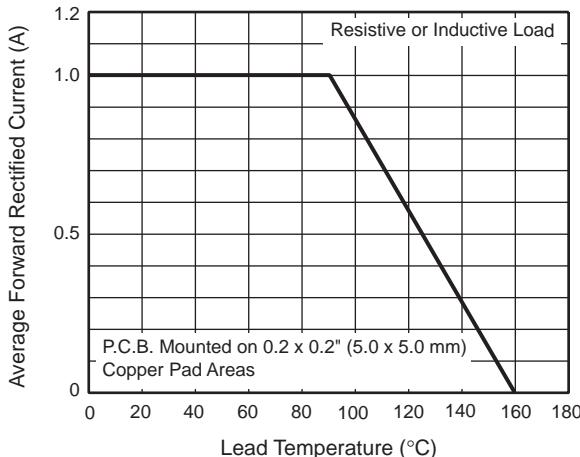


Fig. 2 — Maximum Non-Repetitive Peak Forward Surge Current

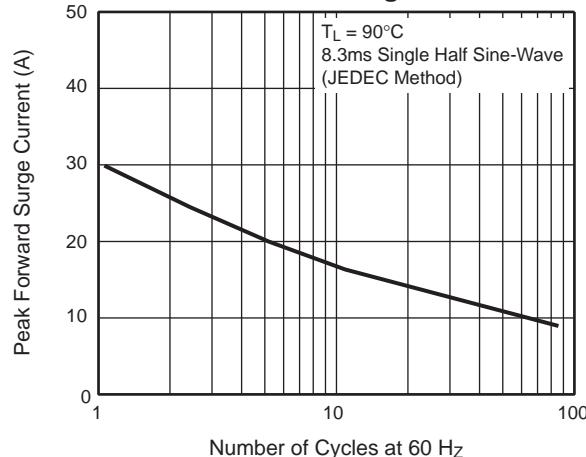


Fig. 3 — Typical Instantaneous Forward Characteristics

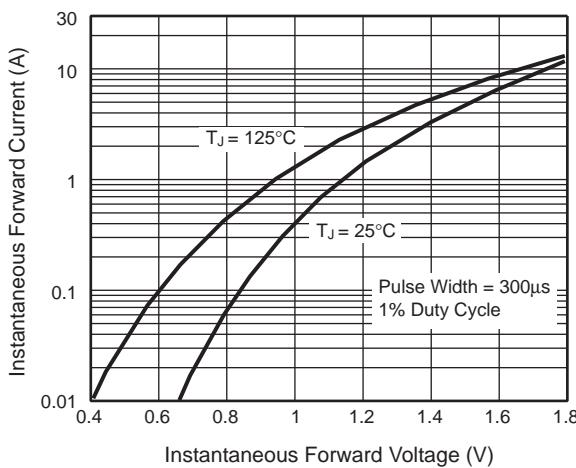


Fig. 4 — Typical Reverse Characteristics

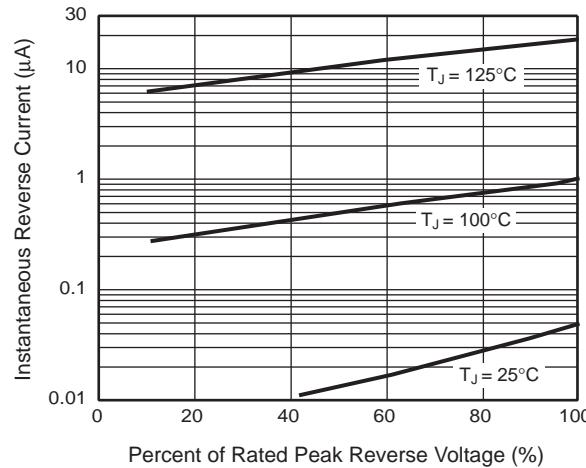


Fig. 5 — Typical Junction Capacitance

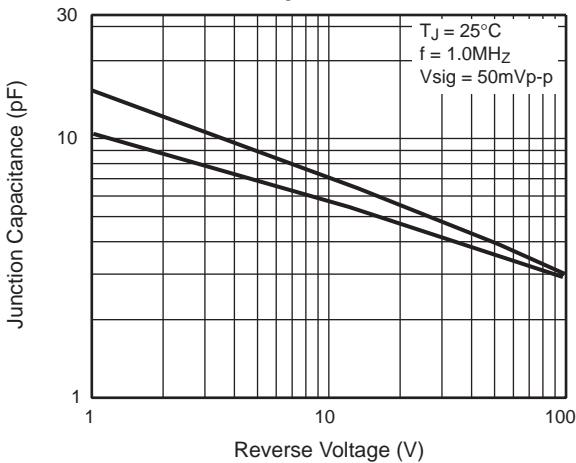


Fig. 6 — Typical Transient Thermal Impedance

