

Isolated Schottky Barrier Rectifiers

FEATURES

- UL Recognized File # E-326243
- Low power loss, high efficiency
- Guardring for overvoltage protection
- High surge current capability
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition



MECHANICAL DATA

Case : ITO-220AC


Molding compound, UL flammability classification rating 94V-0
 Base P/N with suffix "G" on packing code - halogen-free, RoHS compliant
 Base P/N with prefix "H" on packing code - AEC-Q101 qualified

Terminal : Matte tin plated leads, solderable per JESD 22-B102
 Meet JESD 201 class 1A whisker test,
 with prefix "H" on packing code meet JESD 201 class 2 whisker test

Polarity : As marked

Mounting torque : 5 in-lbs maximum

Weight : 1.7 gram (approximately)

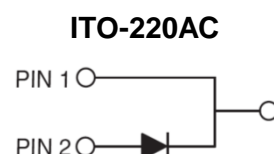

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T _A =25°C unless otherwise noted)										
PARAMETER	SYMBOL	SRAF 820	SRAF 830	SRAF 840	SRAF 850	SRAF 860	SRAF 890	SRAF 8100	SRAF 8150	UNIT
Maximum repetitive peak reverse voltage	V _{RRM}	20	30	40	50	60	90	100	150	V
Maximum RMS voltage	V _{RMS}	14	21	28	35	42	63	70	105	V
Maximum DC blocking voltage	V _{DC}	20	30	40	50	60	90	100	150	V
Maximum average forward rectified current	I _{F(AV)}	8								A
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load	I _{FSM}	150								A
Maximum instantaneous forward voltage (Note 1) IF= 8A	V _F	0.55		0.70		0.85		0.95		V
Maximum reverse current @ Rated V _R T _J =25 °C T _J =100°C T _J =125 °C	I _R	0.5				0.1				mA
		15		10		-				
		-				5				
Voltage rate of change (Rated V _R)	dV/dt	10000								V/us
Typical thermal resistance	R _{θJC}	5								°C/W
Operating junction temperature range	T _J	- 55 to + 125				- 55 to + 150				°C
Storage temperature range	T _{STG}	- 55 to + 150								°C

Note 1 : Pulse test with PW=300u sec, 1% duty cycle

ORDERING INFORMATION

PART NO.	AEC-Q101 QUALIFIED	PACKING CODE	GREEN COMPOUND CODE	PACKAGE	PACKING
SRAF8xx (Note 1)	Prefix "H"	C0	Suffix "G"	ITO-220AC	50 / Tube

Note 1: "xx" defines voltage from 20V (SRAF820) to 150V (SRAF8150)

EXAMPLE

PREFERRED P/N	PART NO.	AEC-Q101 QUALIFIED	PACKING CODE	GREEN COMPOUND CODE	DESCRIPTION
SRAF860 C0	SRAF860		C0		
SRAF860 C0G	SRAF860		C0	G	Green compound
SRAF860HC0	SRAF860	H	C0		AEC-Q101 qualified

RATINGS AND CHARACTERISTICS CURVES

(TA=25°C unless otherwise noted)

FIG. 1- MAXIMUM FORWARD CURRENT DERATING CURVE

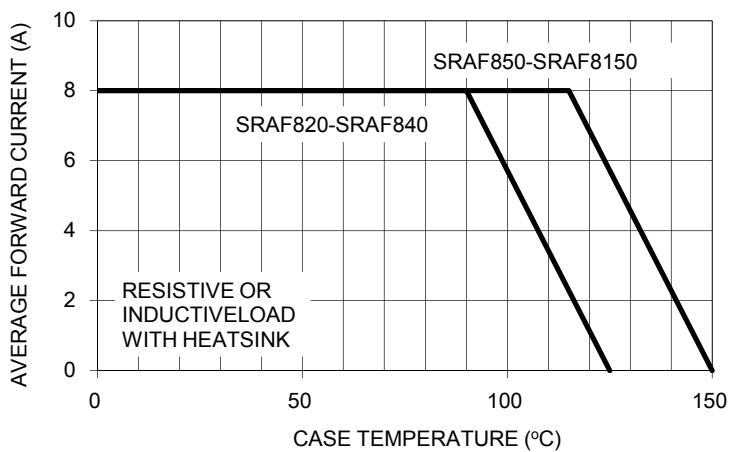


FIG. 2- MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

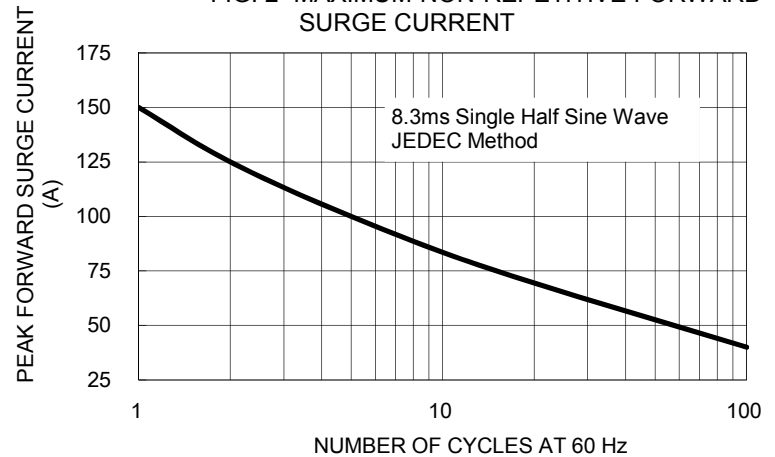


FIG. 3- TYPICAL FORWARD CHARACTERISTICS

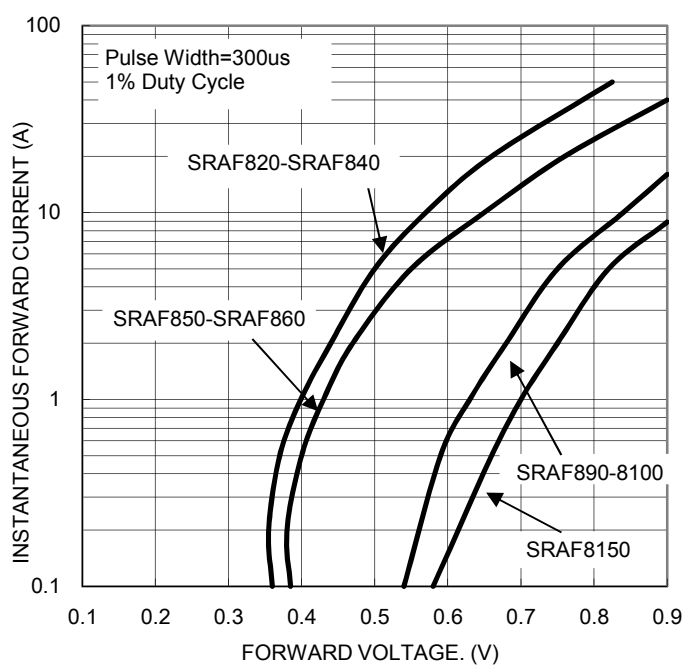


FIG. 4- TYPICAL REVERSE CHARACTERISTICS

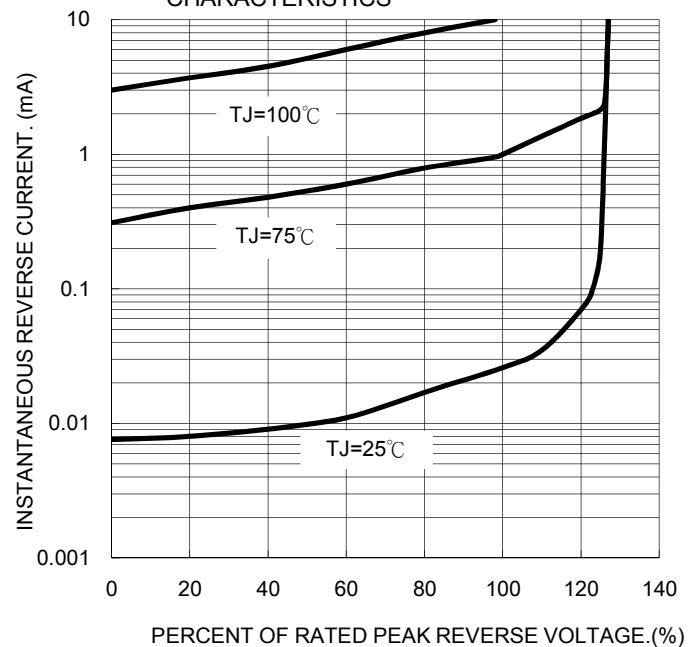


FIG. 5- TYPICAL JUNCTION CAPACITANCE



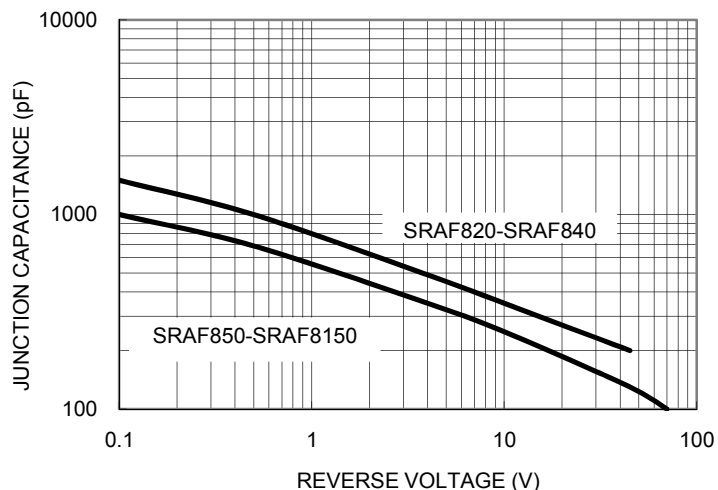


FIG. 6- TYPICAL TRANSIENT THERMAL CHARACTERISTICS

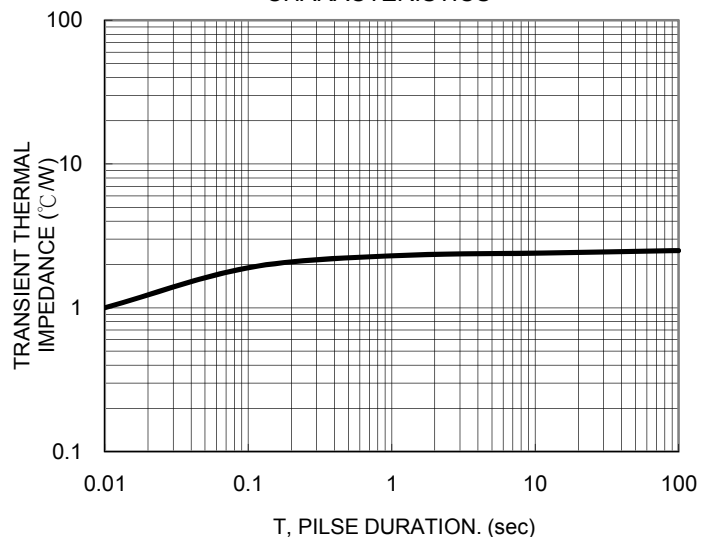


PACKAGE OUTLINE DIMENSIONS

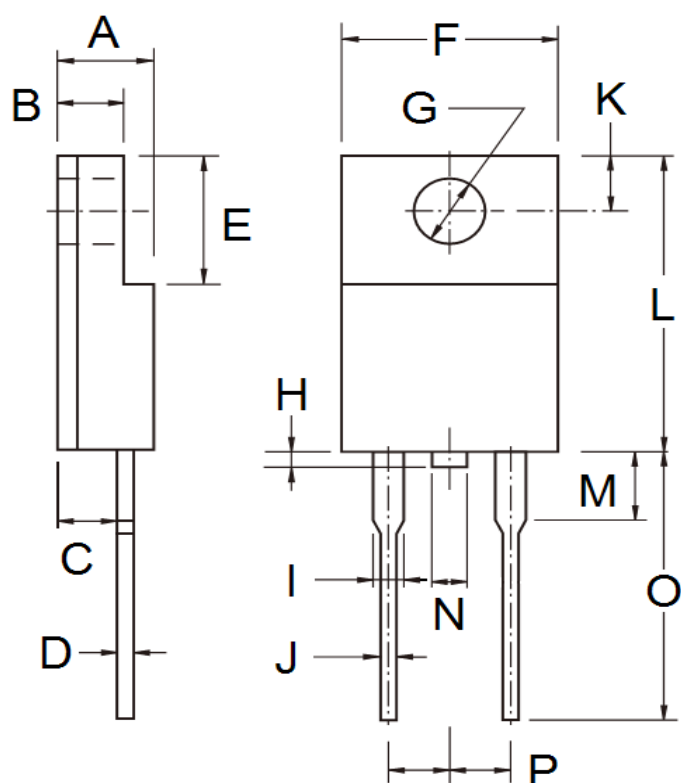

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	4.30	4.70	0.169	0.185
B	2.50	3.10	0.098	0.122
C	2.30	2.90	0.091	0.114
D	0.46	0.76	0.018	0.030
E	6.30	6.90	0.248	0.272
F	9.60	10.30	0.378	0.406
G	3.00	3.40	0.118	0.134
H	0.00	1.60	0.000	0.063
I	0.95	1.45	0.037	0.057
J	0.50	0.90	0.020	0.035
K	2.40	3.20	0.094	0.126
L	14.80	15.50	0.583	0.610
M	-	4.10	-	0.161
N	-	1.80	-	0.071
O	12.60	13.80	0.496	0.543
P	4.95	5.20	0.195	0.205

MARKING DIAGRAM



- P/N = Specific Device Code
- G = Green Compound
- YWW = Date Code
- F = Factory Code