




Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

MMBD1401
MMBD1403
MMBD1404
MMBD1405


Features

- Case Material: Molded Plastic. UL Flammability Classificatio Rating 94-0 and MSL Rating 1
- Low Current Leakage
- High Reverse Voltage





MARKING

MMBD1401 29 MMBD1404 33
 MMBD1403 32 MMBD1405 34

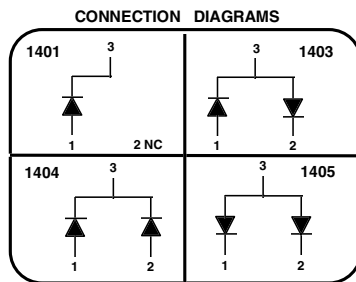

High Voltage General Purpose Diode

SOT-23



DIMENSIONS

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.110	.120	2.80	3.04	
B	.083	.098	2.10	2.64	
C	.047	.055	1.20	1.40	
D	.035	.041	.89	1.03	
E	.070	.081	1.78	2.05	
F	.018	.024	.45	.60	
G	.0005	.0039	.013	.100	
H	.035	.044	.89	1.12	
J	.003	.007	.085	.180	
K	.015	.020	.37	.51	

Maximum Ratings


- Operating Temperature: -55°C to +150°C
- Storage Temperature: -55°C to +150°C
- Maximum Thermal Resistance; 357°C/W Junction To Ambient

Working Inverse Voltage	W_{IV}	175	V
Average Rectified Current	$I_{F(AV)}$	200	mA
DC Forward Current	I_{FM}	600	mA
Recurrent Peak Forward Current	I_{FRM}	700	mA
Non-repetitive Peak Forward Surge Current	I_{FSM}	1.0	A
Pulse width = 1.0second			
Pulse width = 1.0 microsecond			
Total Device Power Dissipation Derate above 25°C	P_D	350 2.8	mW mW/°C


Electrical Characteristics @ 25 °C Unless Otherwise Specified

Parameter	Symbol	Min	Max	Test Condition
Breakdown Voltage	V_R	200V		$I_R=100\mu A$
Instantaneous Reverse Current	V_{FM}	760 mV	850mV 950mV 1.3V 1.5V	$I_F=10mA$ $I_F=50mA$ $I_F=200mA$ $I_F=300mA$
Maximum Instantaneous Reverse Current	I_R		40nA 100nA	$V_R=120V$ $V_R=175V$
Junction Capacitance	C_O		2.0pF	Measured at 1.0MHz, $V_R=0V$
Reverse Recovery Time	T_{rr}		50nS	$I_F=I_R=30mA$ $I_{RR}=1.0mA$ $R_L=100 OHM$


Suggested Solder Pad Layout

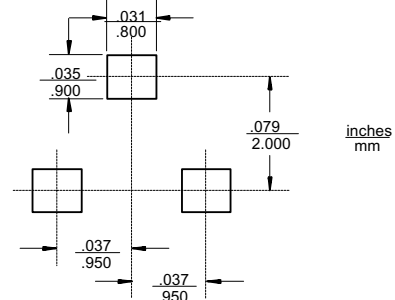


FORWARD VOLTAGE vs FORWARD CURRENT
VF - 0.1 to 10 mA

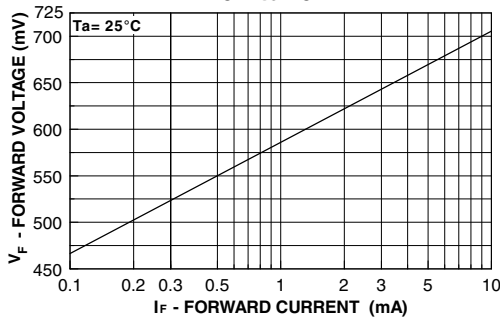


FORWARD VOLTAGE vs FORWARD CURRENT
VF - 10 to 800 mA

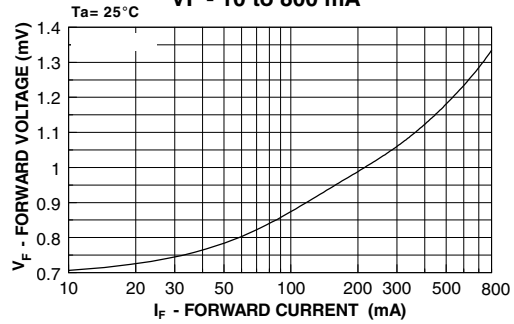


Forward Voltage vs Ambient Temperature
VF - 1.0 uA - 10 mA (-40 to + 80 Deg C)

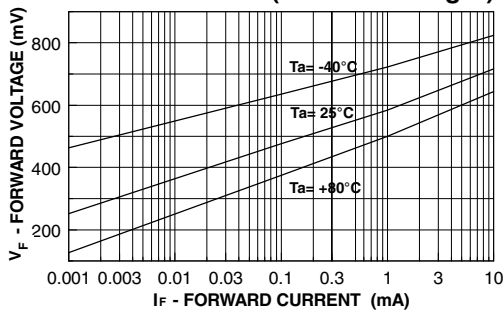


CAPACITANCE vs REVERSE VOLTAGE
VR - 0 to 15 V

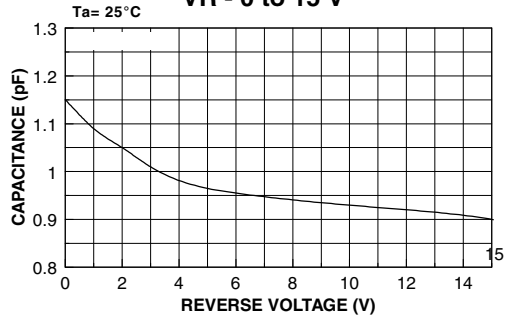


REVERSE RECOVERY TIME vs REVERSE RECOVERY CURRENT (Irr)

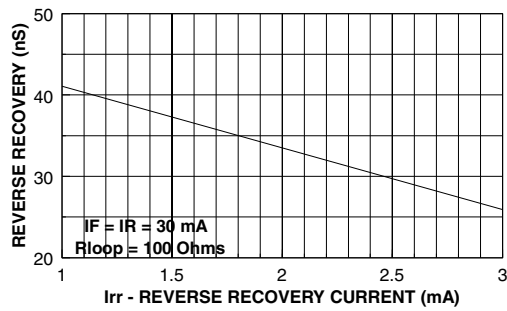

Average Rectified Current (Io) & Forward Current (IF) versus Ambient Temperature (TA)

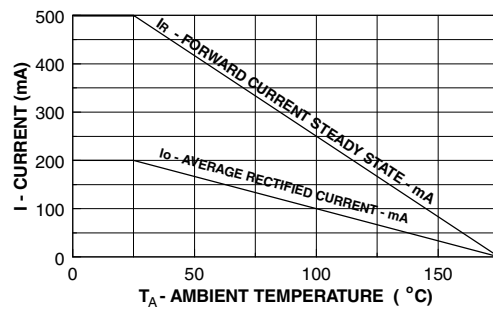

POWER DERATING CURVE

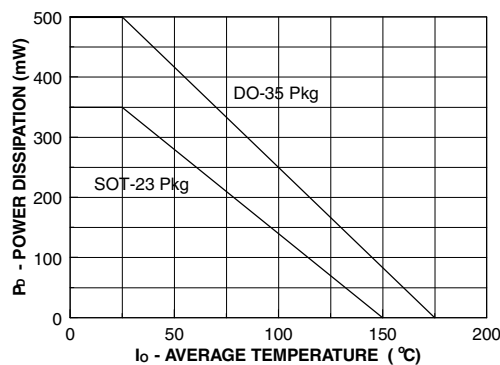



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.