



LH0062/LH0062C High Speed FET Operational Amplifier

General Description


The LH0062/LH0062C is a precision, high speed FET input operational amplifier with more than an order of magnitude improvement in slew rate and bandwidth over conventional FET IC op amps. In addition it features very closely matched input characteristics, very high input impedance, and ultra low input currents with no compromise in noise, common mode rejection ratio or open loop gain. The device has internal unity gain frequency compensation, thus assuring stability in all normal applications. This considerably simplifies its application, since no external components are necessary for operation. However, unlike most internally compensated amplifiers, external frequency compensation may be added for optimum performance. For inverting applications, feed-forward compensation will boost the slew rate to over 120 V/ μ s and almost double the bandwidth. (See LB-2, LB-14, and LB-17 for discussions of the application of feed-forward techniques). Over-compensation can be used with the amplifier for greater stability when maximum bandwidth is not needed. Further, a single capacitor can be added to reduce the 0.1% settling time to under 1 μ s. In addition it is free of latch-up and may be simply offset nulled with negligible effect on offset drift or CMRR.

The LH0062 is designed for applications requiring wide bandwidth, high slew rate and fast settling time while at the same time demanding the high input impedance and low input currents characteristic of FET inputs. Thus it is particularly suited for such applications as video amplifiers, sample/hold circuits, high speed integrators, and buffers for A/D conversion and multiplex system. The LH0062 is specified for the full military temperature range of -55° to +125°C while the LH0062C is specified to operate over a -25°C to +85°C temperature range.

Features

- High slew rate 70 V/ μ s
- Wide bandwidth 15 MHz
- Settling time (0.1%) 1 μ s
- Low input offset voltage 2 mV
- Low input offset current 1 pA
- Wide supply range $\pm 5V$ to $\pm 20V$
- Internal 6 dB/octave frequency compensation
- Pin compatible with std IC op amps (TO-5 pkg)

Schematic Diagram

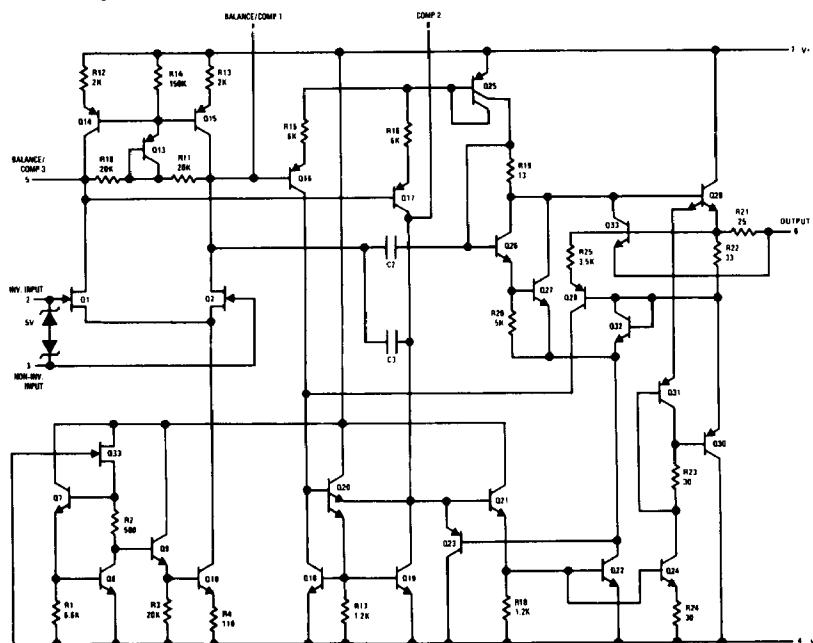

*Pin Numbers Shown for TO-5 Package

Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications. (Note 5)

Supply Voltage	$\pm 20V$
Power Dissipation (see graph)	500 mW
Input Voltage (Note 1)	$\pm 5V$
Differential Input Voltage (Note 2)	$\pm 30V$

Short Circuit Duration	Continuous
Operating Temperature LH0062	-55°C to +125°C
LH0062C	-25°C to +85°C
Storage Temperature Range	-65°C to +150°C
Lead Temperature (Soldering, 10 sec.)	260°C
ESD rating to be determined.	

DC Electrical Characteristics (Note 3)

Parameter	Conditions	Limits						Units	
		LH0062			LH0062C				
		Min	Typ	Max	Min	Typ	Max		
Input Offset Voltage	$R_S \leq 100 \text{ k}\Omega, T_A = 25^\circ\text{C}$, $R_S \leq 100 \text{ k}\Omega$		2	5		10	15	mV	
				7			20	mV	
Temperature Coefficient of Input Offset Voltage	$R_S \leq 100 \text{ k}\Omega$		25			25		$\mu\text{V}/^\circ\text{C}$	
Offset Voltage Drift with Time			4			5		$\mu\text{V}/\text{week}$	
Input Offset Current	$T_A = 25^\circ\text{C}$		0.2	2		1	5	pA	
				2			0.2	nA	
Temperature Coefficient of Input Offset Current		Doubles every 10°C			Doubles every 10°C				
Offset Current Drift with Time			0.1			0.1		pA/week	
Input Bias Current	$T_A = 25^\circ\text{C}$ (Note 4)		5	10		10	65	pA	
				10			2	nA	
Temperature Coefficient of Input Bias Current		Doubles every 10°C			Doubles every 10°C				
Differential Input Resistance			10 ¹²			10 ¹²		Ω	
Common Mode Input Resistance			10 ¹²			10 ¹²		Ω	
Input Capacitance			4			4		pF	
Input Voltage Range	$V_S = \pm 15V$	± 10	± 12		± 10	± 12		V	
Common Mode Rejection Ratio	$R_S \leq 10 \text{ k}\Omega, V_{IN} = \pm 10V$	80	90		70	90		dB	
Supply Voltage Rejection Ratio	$R_S \leq 10 \text{ k}\Omega, \pm 5V \leq V_S \leq \pm 15V$	80	90		70	90		dB	
Large Signal Voltage Gain	$R_L = 2 \text{ k}\Omega, V_{OUT} = \pm 10V, T_A = 25^\circ\text{C}, V_S = \pm 15V$ $R_L = 2 \text{ k}\Omega, V_{OUT} = \pm 10V, V_S = \pm 15V$	50	200		25	160		V/mV	
		25			25			V/mV	
Output Voltage Swing	$R_L = 2 \text{ k}\Omega, T_A = 25^\circ\text{C}, V_S = \pm 15V$ $R_L = 2 \text{ k}\Omega, V_S = \pm 15V$	± 12	± 13		± 12	13		V	
		± 10			± 10			V	
Output Current Swing	$V_{OUT} = \pm 10V, T_A = 25^\circ\text{C}$	± 10	± 15		± 10	± 15		mA	
Output Resistance			75			75		Ω	
Output Short Circuit Current	$T_A = 25^\circ\text{C}$		25			25		mA	
Supply Current	$V_S = \pm 15V$		5	8		7	12	mA	
Power Consumption	$V_S = \pm 15V$			240			360	mW	

AC Electrical Characteristics ($T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$)

Parameter	Conditions	Limits						Units	
		LH0062			LH0062C				
		Min	Typ	Max	Min	Typ	Max		
Slew Rate	Voltage Follower	50	70		50	70		$\text{V}/\mu\text{s}$	
Large Signal Bandwidth	Voltage Follower		2			2		MHz	
Small Signal Bandwidth			15			15		MHz	
Rise Time			25			25		ns	
Overshoot			10			15		%	
Settling Time (0.1%)	$\Delta V_{IN} = 10\text{V}$		1			1		μs	
Overload Recovery			0.9			0.9		μs	
Input Noise Voltage	$R_S = 10\text{k}\Omega$, $f_o = 10\text{ Hz}$		150			150		$\text{nV}/\sqrt{\text{Hz}}$	
Input Noise Voltage	$R_S = 10\text{k}\Omega$, $f_o = 100\text{ Hz}$		55			55		$\text{nV}/\sqrt{\text{Hz}}$	
Input Noise Voltage	$R_S = 10\text{k}\Omega$, $f_o = 1\text{ kHz}$		35			35		$\text{nV}/\sqrt{\text{Hz}}$	
Input Noise Voltage	$R_S = 10\text{k}\Omega$, $f_o = 10\text{ kHz}$		30			30		$\text{nV}/\sqrt{\text{Hz}}$	
Input Noise Voltage	$BW = 10\text{ Hz to } 10\text{ kHz}$, $R_S = 10\text{k}\Omega$		12			12		μVRms	
Input Noise Current	$BW = 10\text{ Hz to } 10\text{ kHz}$		<0.1			<0.1		pArms	

Note 1: For supply voltages less than $\pm 15\text{V}$, the absolute maximum input voltage is equal to the supply voltage.

Note 2: Inputs are protected from excessive voltages by back-to-back diodes. Input currents should be limited to 1 mA.


Note 3: Unless otherwise specified, these specifications apply for $\pm 5\text{V} \leq V_S \leq \pm 20\text{V}$ and $-55^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$ for the LH0062 and $-25^\circ\text{C} \leq T_A \leq +85^\circ\text{C}$ for the LH0062C. Typical values are given for $T_A = 25^\circ\text{C}$. Power supplies should be bypassed with 0.1 μF ceramic capacitors.

Note 4: Input currents are a strong function of temperature. Due to high speed testing they are specified at a junction temperature $T = 25^\circ\text{C}$, self heating will cause an increase in current in manual tests. 25°C spec is guaranteed by testing at 125°C .

Note 5: Refer to RETS0062X for LH0062D and LH0062H military specifications.

Connection Diagrams


Metal Can Package

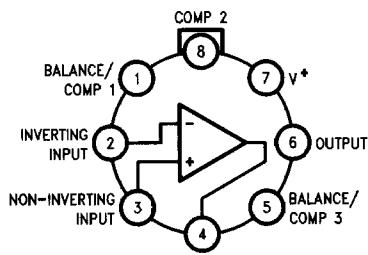

Top View

Order Number LH0062H or LH0062CH
See NS Package Number H08D

Dual-In-Line Package












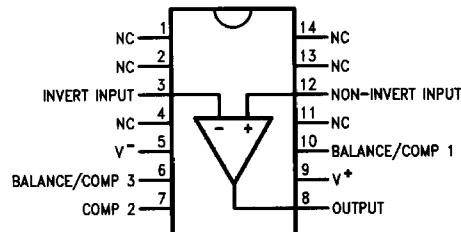


Top View










Order Number LH0062D or LH0062CD
See NS Package Number D14E

Typical Performance Characteristics

LH0062/LH0062C




Typical Performance Characteristics (Continued)



*Noise Voltage Includes Contribution from Source Resistance

Auxiliary Circuits


Feedforward Compensation for Greater Inverting Slew Rate†

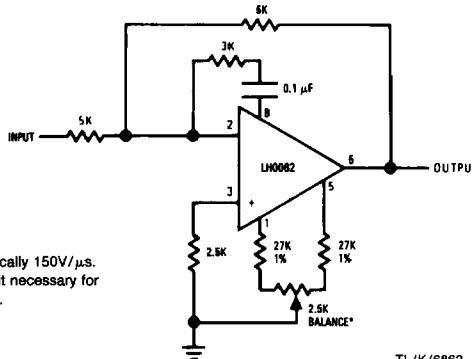


†Slew rate typically 150V/ μ s.

*Balance circuit necessary for increased slew.

Offset Balancing




Compensation for Minimum Settling† Time




†Slew and settling time to 0.1% for a 10V step changes is 800 ns.


Isolating Large Capacitive Loads

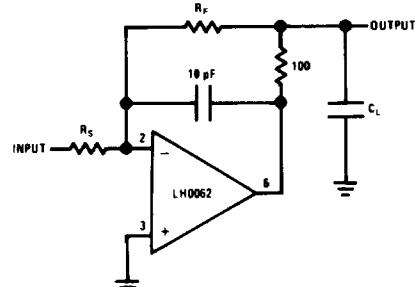

Overcompensation




Boosting Output Drive to ± 100 mA

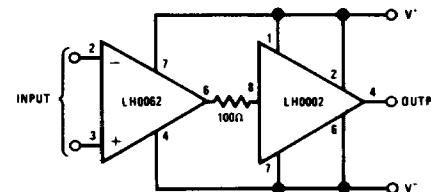


Typical Applications*


Fast Voltage Follower




Fast Summing Amplifier




Differential Amplifier




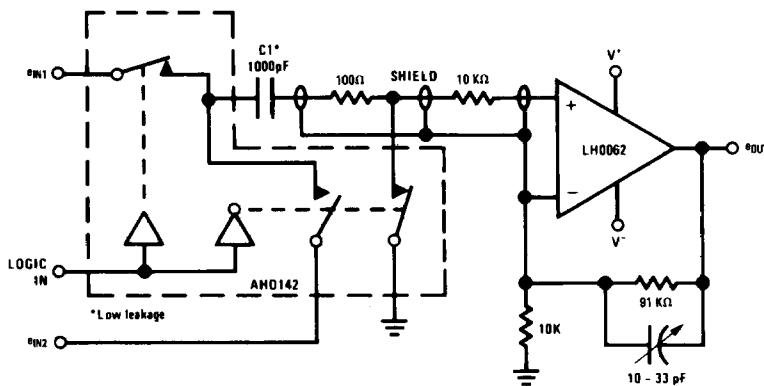Typical Applications* (Continued)**High Speed Subtractor**


TL/K/6862-15

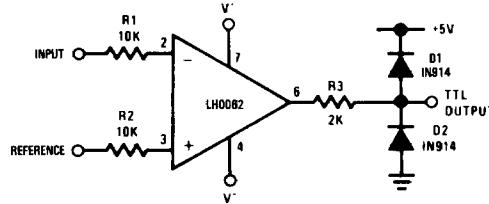Fast Precision Voltage Comparator

TL/K/6862-16

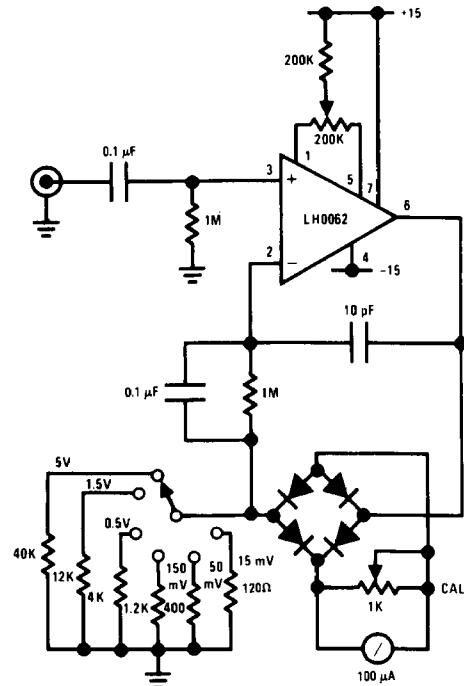
Wide Range AC Voltmeter

TL/K/6862-17

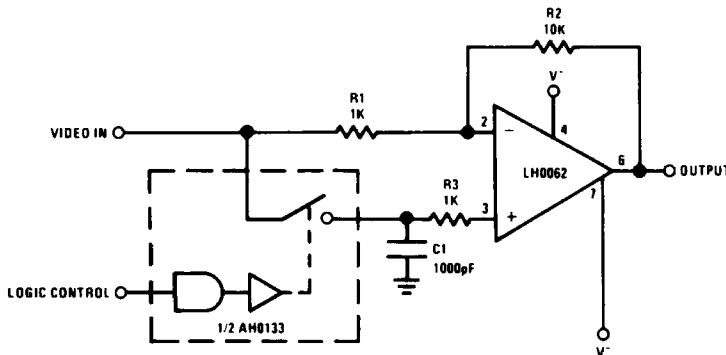
Typical Applications* (Continued)**Video DC Restoring Amplifier**

*Pin numbers shown for TO-5 package

TL/K/6862-18

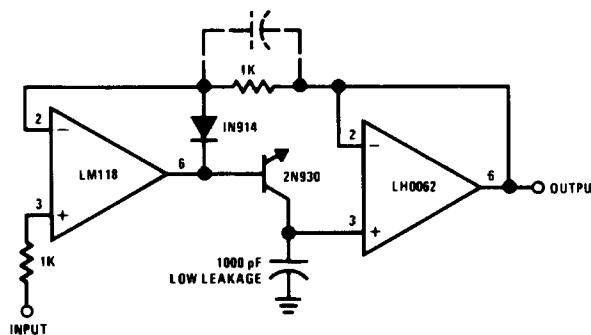
High Speed Positive Peak Detector

TL/K/6862-19

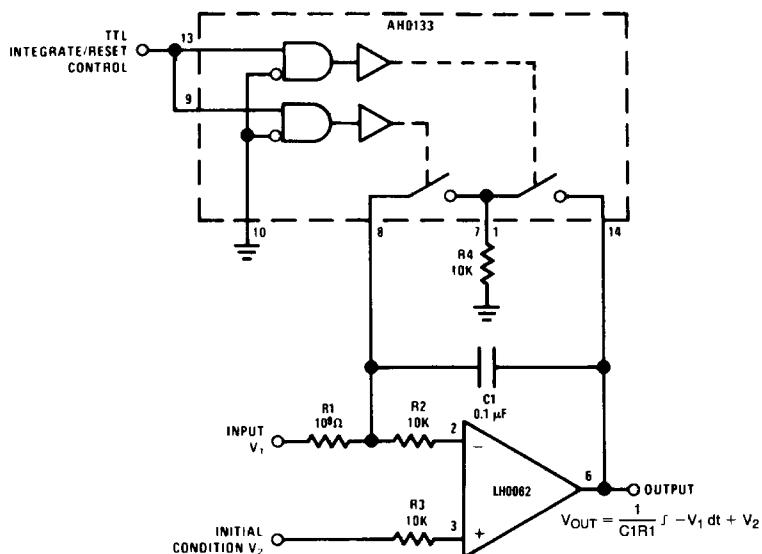
Precision Integrator

*Pin numbers shown for TO-5 package

TL/K/6862-20

Typical Applications* (Continued)**Precision Wide Range Current to Period Converter**

TL/K/6862-21

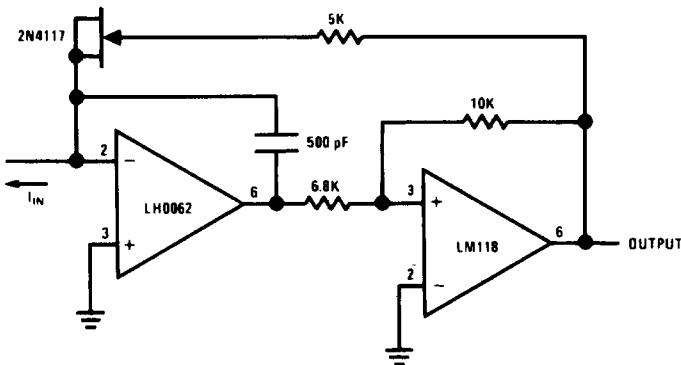

TL/K/6862-22