



**PIN HEADER „PRECISION“**  
**ID: 107**                      STL 40-XX

Series 430

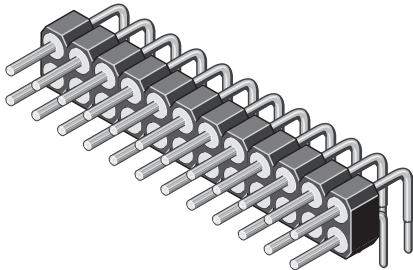

**TECHNICAL DATA**

Pitch	2,54 mm
Insulating Material	high temp. thermoplast UL94V-0
Contact Material	Brass
Rated Current	3 Amp.
Rated Voltage	100 V <sub>RMS</sub> /150 V <sub>DC</sub>
Withstanding Voltage	min. 1000 V <sub>RMS</sub>
Operating Temperature	-55°C to +125°C
Maximum Soldering Temperature	260°C for 10 seconds

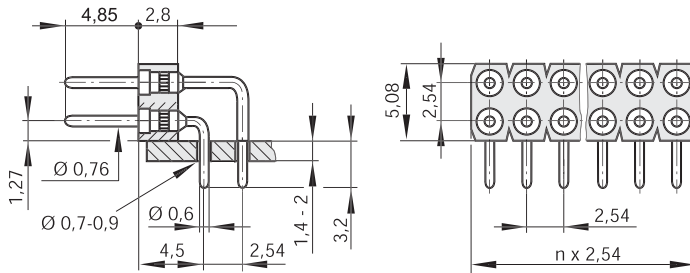

All dimensions in mm.  
 Other dimensions upon request.

**STL 40 - XX - XX U**

- STL 40: 2 rows, right angled
- XX: No. of contacts  
2 - 72 poles possible
- XX: ST = Sn  
SG = Au
- U: RoHS-compliant with high temp. plastic

7 | 2,54 mm