

54AC/74AC823 • 54ACT/74ACT823
54AC/74AC824 • 54ACT/74ACT824

9-Bit D-Type Flip-Flop

Description


The 'AC/'ACT823 and 'AC/'ACT824 are 9-bit buffered registers. They feature Clock Enable and Clear which are ideal for parity bus interfacing in high performance microprogramming systems. The 'AC/'ACT 823 offers noninverting outputs and the 'AC/'ACT824 offers inverting outputs.

The 'AC/'ACT823 is fully compatible with AMD's AM29823.

- **Outputs Source/Sink 24 mA**
- **3-State Outputs for Bus Interfacing**
- **Inputs and Outputs are on Opposite Sides**
- **'ACT823 and 'ACT824 have TTL-Compatible Inputs**

Ordering Code: See Section 6

Logic Symbol ('AC/'ACT823)*

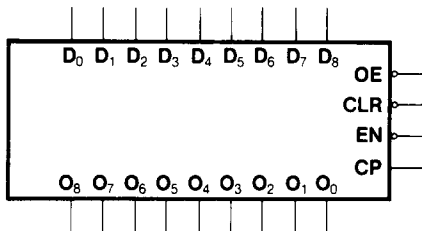


*The 'AC/'ACT824 has inverting outputs.


Pin Names

- D₀ - D₈** Data Inputs
- O₀ - O₈** Data Outputs ('AC/'ACT823)
- $\bar{O}_0 - \bar{O}_8$** Data Outputs ('AC/'ACT824)
- $\bar{O}E$** Output Enable
- CLR** Clear
- CP** Clock Input
- EN** Clock Enable

Connection Diagrams

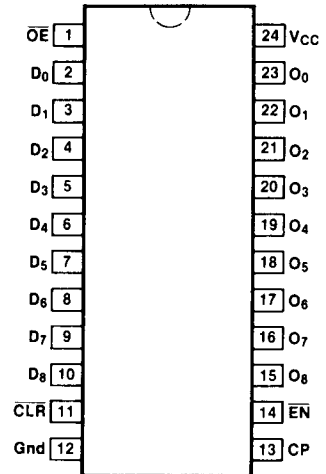

Pin Assignment for DIP, Flatpak and SOIC

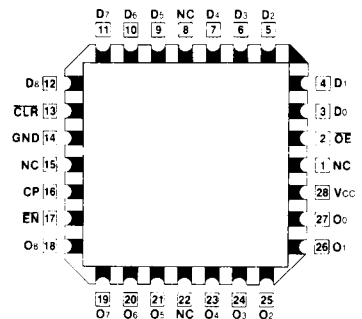

Pin Assignment for LCC

AC823 • ACT823 • AC824 • ACT824

Functional Description

The 'AC/'ACT823 and 'AC/'ACT824 consist of nine D-type edge-triggered flip-flops. These have 3-state outputs for bus systems organized with inputs and outputs on opposite sides. The buffered clock (CP) and buffered Output Enable (\overline{OE}) are common to all flip-flops. The flip-flops will store the state of their individual D inputs that meet the setup and hold time requirements on the LOW-to-HIGH CP transition. With \overline{OE} LOW, the contents of the flip-flops are available at the outputs. When \overline{OE} is HIGH, the outputs go to the high impedance state. Operation of the \overline{OE} input does not affect

the state of the flip-flops. In addition to the Clock and Output Enable pins, there are Clear (\overline{CLR}) and Clock Enable (\overline{EN}) pins. These devices are ideal for parity bus interfacing in high performance systems.


When \overline{CLR} is LOW and \overline{OE} is LOW, the outputs are LOW. When \overline{CLR} is HIGH, data can be entered into the flip-flops. When \overline{EN} is LOW, data on the inputs is transferred to the outputs on the LOW-to-HIGH clock transition. When the \overline{EN} is HIGH, the outputs do not change state, regardless of the data or clock input transitions.

Function Table

Inputs					Internal	Outputs		Function
\overline{OE}	\overline{CLR}	\overline{EN}	CP	D	Q	O ('823)	\overline{O} ('824)	
H	X	L	J	L	L	Z	Z	High Z
H	X	L	J	H	H	Z	Z	High Z
H	L	X	X	X	L	Z	Z	Clear
L	L	X	X	X	L	L	L	Clear
H	H	H	X	X	NC	Z	Z	Hold
L	H	H	X	X	NC	NC	NC	Hold
H	H	L	J	L	L	Z	Z	Load
H	H	L	J	H	H	Z	Z	Load
L	H	L	J	L	L	L	H	Load
L	H	L	J	H	H	H	L	Load

H = HIGH Voltage Level
 L = LOW Voltage Level
 X = Immaterial
 Z = High Impedance
 J = LOW-to-HIGH Transition
 NC = No Change

Logic Diagram ('AC/ACT823)

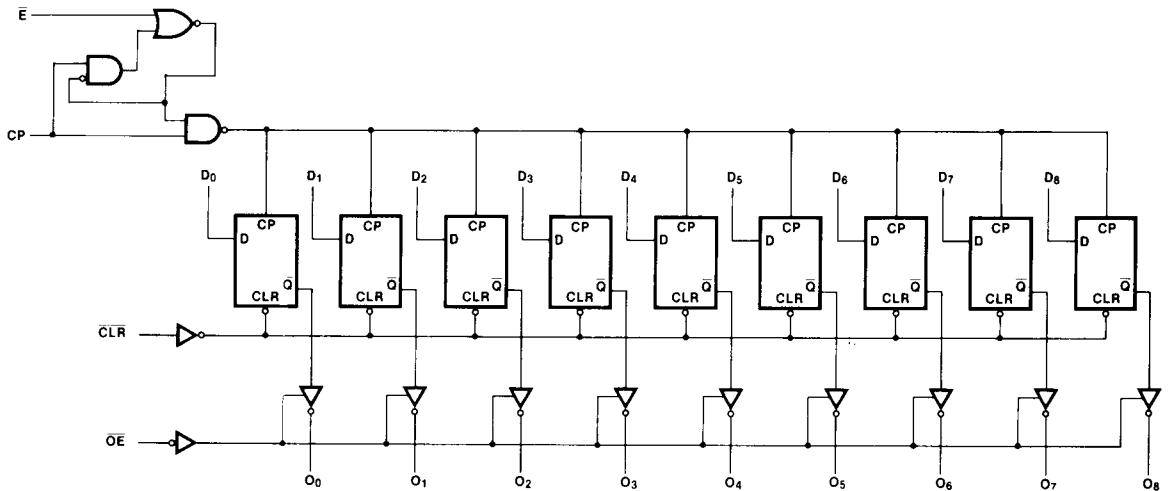

Please note that this diagram is provided only for the understanding of logic operations and should not be used to estimate propagation delays. The 'AC/ACT824 also has the same logic diagram with inverting outputs.

DC Characteristics (unless otherwise specified)

Symbol	Parameter	54AC/ACT	74AC/ACT	Units	Conditions
I _{CC}	Maximum Quiescent Supply Current	160	80	μA	V _{IN} = V _{CC} or Ground, V _{CC} = 5.5 V, T _A = Worst Case
I _{CC}	Maximum Quiescent Supply Current	8.0	8.0	μA	V _{IN} = V _{CC} or Ground, V _{CC} = 5.5 V, T _A = 25°C
I _{CC(T)}	Maximum Additional I _{CC} /Input ('ACT823/824)	1.6	1.5	mA	V _{IN} = V _{CC} - 2.1 V V _{CC} = 5.5 V, T _A = Worst Case

AC823 • ACT823 • AC824 • ACT824

AC Characteristics

Symbol	Parameter	V _{cc} * (V)	74AC			54AC		74AC		Units	Fig. No.
			T _A = +25°C C _L = 50 pF			T _A = -55°C to +125°C C _L = 50 pF		T _A = -40°C to +85°C C _L = 50 pF			
			Min	Typ	Max	Min	Max	Min	Max		
f _{max}	Maximum Clock Frequency	3.3 5.0	100 125							MHz	3-3
t _{PLH}	Propagation Delay CP to O _n	3.3 5.0	9.5 6.5							ns	3-6
t _{PHL}	Propagation Delay CP to O _n	3.3 5.0	9.5 6.5							ns	3-6
t _{PHL}	Propagation Delay CLR to O _n	3.3 5.0	14.5 10.5							ns	3-6
t _{PZH}	Output Enable Time OE to O _n	3.3 5.0	7.5 5.5							ns	3-7
t _{PZL}	Output Enable Time OE to O _n	3.3 5.0	8.0 6.0							ns	3-8
t _{PHZ}	Output Disable Time OE to O _n	3.3 5.0	10.5 7.5							ns	3-7
t _{PLZ}	Output Disable Time OE to O _n	3.3 5.0	8.5 6.0							ns	3-8

*Voltage Range 3.3 is 3.3 V ± 0.3 V
Voltage Range 5.0 is 5.0 V ± 0.5 V

Military parameters given herein are for general references only. For current military specifications and subgroup testing information please request Fairchild's Table I data sheet from your Fairchild sales engineer or account representative.

AC Operating Requirements

Symbol	Parameter	Vcc* (V)	74AC	54AC	74AC	Units	Fig. No.
			TA = +25°C CL = 50 pF	TA = -55°C to +125°C CL = 50 pF	TA = -40°C to +85°C CL = 50 pF		
			Typ	Guaranteed Minimum			
ts	Setup Time, HIGH or LOW Dn to CP	3.3	3.0			ns	3-9
		5.0	2.0				
th	Hold Time, HIGH or LOW Dn to CP	3.3	2.0			ns	3-9
		5.0	1.5				
ts	Setup Time, HIGH or LOW EN to CP	3.3	3.0			ns	3-9
		5.0	2.0				
th	Hold Time, HIGH or LOW EN to CP	3.3	2.0			ns	3-9
		5.0	1.5				
tw	CP Pulse Width HIGH or LOW	3.3	3.5			ns	3-6
		5.0	2.5				
tw	CLR Pulse Width, LOW	3.3	5.0			ns	3-6
		5.0	3.5				
trec	CLR to CP Recovery Time	3.3	2.0			ns	3-9
		5.0	1.5				

*Voltage Range 3.3 is 3.3 V ± 0.3 V
Voltage Range 5.0 is 5.0 V ± 0.5 V

Military parameters given herein are for general references only. For current military specifications and subgroup testing information please request Fairchild's Table I data sheet from your Fairchild sales engineer or account representative.

AC823 • ACT823 • AC824 • ACT824

AC Characteristics

Symbol	Parameter	V _{cc} * (V)	74ACT			54ACT		74ACT		Units	Fig. No.
			T _A = +25°C C _L = 50 pF			T _A = -55°C to +125°C C _L = 50 pF		T _A = -40°C to +85°C C _L = 50 pF			
			Min	Typ	Max	Min	Max	Min	Max		
f _{max}	Maximum Clock Frequency	5.0	110							MHz	3-3
t _{PLH}	Propagation Delay CP to O _n	5.0	8.0							ns	3-6
t _{PHL}	Propagation Delay CP to O _n	5.0	8.0							ns	3-6
t _{PHL}	Propagation Delay CLR to O _n	5.0	12.0							ns	3-6
t _{PZH}	Output Enable Time OE to O _n	5.0	7.0							ns	3-7
t _{PZL}	Output Enable Time OE to O _n	5.0	7.5							ns	3-8
t _{PHZ}	Output Disable Time OE to O _n	5.0	10.0							ns	3-7
t _{PLZ}	Output Disable Time OE to O _n	5.0	8.5							ns	3-8

*Voltage Range 5.0 is 5.0 V ± 0.5 V

Military parameters given herein are for general references only. For current military specifications and subgroup testing information please request Fairchild's Table I data sheet from your Fairchild sales engineer or account representative.

AC Operating Requirements

Symbol	Parameter	Vcc* (V)	74ACT	54ACT	74ACT	Units	Fig. No.
			TA = +25°C CL = 50 pF	TA = -55°C to +125°C CL = 50 pF	TA = -40°C to +85°C CL = 50 pF		
			Typ	Guaranteed Minimum			
ts	Setup Time, HIGH or LOW D to CP	5.0	2.0			ns	3-9
th	Hold Time, HIGH or LOW Dn to CP	5.0	1.0			ns	3-9
ts	Setup Time, HIGH or LOW EN to CP	5.0	2.0			ns	3-9
th	Hold Time, HIGH or LOW EN to CP	5.0	1.5			ns	3-9
tw	CP Pulse Width HIGH or LOW	5.0	3.0			ns	3-6
tw	CLR Pulse Width, LOW	5.0	4.0			ns	3-6
trec	CLR to CP Recovery Time	5.0	1.5			ns	3-9

*Voltage Range 5.0 is 5.0 V ± 0.5 V

Military parameters given herein are for general references only. For current military specifications and subgroup testing information please request Fairchild's Table I data sheet from your Fairchild sales engineer or account representative.

Capacitance

Symbol	Parameter	54/74AC/ACT	Units	Conditions
		Typ		
CIN	Input Capacitance	4.5	pF	Vcc = 5.5 V
CPD	Power Dissipation Capacitance		pF	Vcc = 5.5 V