

## MMBZ5226B - MMBZ5257B Series Zeners

### Absolute Maximum Ratings\*

TA = 25°C unless otherwise noted


Parameter	Value	Units
Storage Temperature Range	-55 to +150	°C
Maximum Junction Operating Temperature	+ 150	°C
Total Device Dissipation Derate above 25°C	350 1.8	mW mW/°C

\*These ratings are limiting values above which the serviceability of the diode may be impaired.

**NOTES:**

- 1) These ratings are based on a maximum junction temperature of 150 degrees C.
- 2) These are steady state limits. The factory should be consulted on applications involving pulsed or low duty cycle operations.

Tolerance: B = 5%

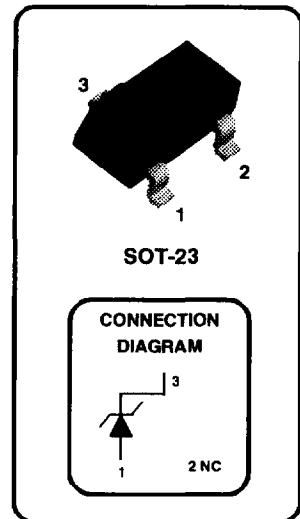

### Electrical Characteristics

TA = 25°C unless otherwise noted

4

Device	Mark	V <sub>Z</sub> (V)	Z <sub>Z</sub> (Ω)	I <sub>ZT</sub> (mA)	Z <sub>ZK</sub> (Ω)	I <sub>ZK</sub> (mA)	V <sub>R</sub> (V)	@	I <sub>R</sub> (μA)
<b>MMBZ 5226B</b>	8A	3.3	28	20	1,600	0.25	1.0		25
<b>MMBZ 5227B</b>	8B	3.6	24	20	1,700	0.25	1.0		15
<b>MMBZ 5228B</b>	8C	3.9	23	20	1,900	0.25	1.0		10
<b>MMBZ 5229B</b>	8D	4.3	22	20	1,000	0.25	1.0		5.0
<b>MMBZ 5230B</b>	8E	4.7	19	20	1,900	0.25	2.0		5.0
<b>MMBZ 5231B</b>	8F	5.1	17	20	1,600	0.25	2.0		5.0
<b>MMBZ 5232B</b>	8G	5.6	11	20	1,600	0.25	3.0		5.0
<b>MMBZ 5233B</b>	8H	6.0	7.0	20	1,600	0.25	3.5		5.0
<b>MMBZ 5234B</b>	8J	6.2	7.0	20	1,000	0.25	4.0		5.0
<b>MMBZ 5235B</b>	8K	6.8	5.0	20	750	0.25	5.0		3.0
<b>MMBZ 5236B</b>	8L	7.5	6.0	20	500	0.25	6.0		3.0
<b>MMBZ 5237B</b>	8M	8.2	8.0	20	500	0.25	6.5		3.0
<b>MMBZ 5238B</b>	8N	8.7	8.0	20	600	0.25	6.5		3.0
<b>MMBZ 5239B</b>	8P	9.1	10	20	600	0.25	7.0		3.0
<b>MMBZ 5240B</b>	8Q	10	17	20	600	0.25	8.0		3.0
<b>MMBZ 5241B</b>	8R	11	22	20	600	0.25	8.4		2.0
<b>MMBZ 5242B</b>	8S	12	30	20	600	0.25	9.1		1.0

V<sub>F</sub> Forward Voltage = 0.9 V Maximum @ I<sub>F</sub> = 10 mA for all MMBZ 5200 series

**NOTE:** National preferred devices in **BOLD**

**MMBZ Series Zeners**

(continued)

**Electrical Characteristics** (continued) TA = 25°C unless otherwise noted

<b>Device</b>	<b>Mark</b>	<b>V<sub>Z</sub></b> (V)	<b>Z<sub>Z</sub></b> (Ω)	<b>I<sub>ZT</sub></b> (mA)	<b>Z<sub>ZK</sub></b> (Ω)	<b>I<sub>ZK</sub></b> (mA)	<b>V<sub>R</sub></b> (V)	<b>I<sub>R</sub></b> (nA)
MMBZ 5243B	8T	13	13	9.5	600	0.25	9.9	500
MMBZ 5244B	8U	14	15	9.0	600	0.25	10	100
<b>MMBZ 5245B</b>	<b>8V</b>	<b>15</b>	<b>16</b>	<b>8.5</b>	<b>600</b>	<b>0.25</b>	<b>11</b>	<b>100</b>
MMBZ 5246B	8W	16	17	7.8	600	0.25	12	100
MMBZ 5247B	8X	17	19	7.4	600	0.25	13	100
MMBZ 5248B	8Y	18	21	7.0	600	0.25	14	100
MMBZ 5249B	8Z	19	23	6.6	600	0.25	14	100
MMBZ 5250B	81A	20	25	6.2	600	0.25	15	100
MMBZ 5251B	81B	22	29	5.6	600	0.25	17	100
MMBZ 5252B	81C	24	33	5.2	600	0.25	18	100
MMBZ 5253B	81D	25	35	5.0	600	0.25	19	100
<b>MMBZ 5254B</b>	<b>81E</b>	<b>27</b>	<b>41</b>	<b>4.6</b>	<b>600</b>	<b>0.25</b>	<b>21</b>	<b>100</b>
<b>MMBZ 5255B</b>	<b>81F</b>	<b>28</b>	<b>44</b>	<b>4.5</b>	<b>600</b>	<b>0.25</b>	<b>21</b>	<b>100</b>
MMBZ 5256B	81G	30	49	4.2	600	0.25	23	100
MMBZ 5257B	81H	33	58	3.8	700	0.25	25	100

V<sub>F</sub> Forward Voltage = 0.9 V Maximum @ I<sub>F</sub> = 10 mA for all MMBZ 5200 series**NOTE:** National preferred devices in **BOLD**