


Zener Diodes

Features

- Silicon planar power Zener diodes
- For use in stabilizing and clipping circuits with high power rating
- Standard Zener voltage tolerance is $\pm 5\%$
- These diodes are also available in the DO-41 case with type designation 1N4728A to 1N4764A
- AEC-Q101 qualified
- Compliant to RoHS directive 2002/95/EC and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition



18315

Mechanical Data

Case: MELF DO-213AB (glass)

Weight: approx. 135 mg

Cathode band color: black

Packaging codes/options:

GS18/5K per 13" reel (12 mm tape), 10K/box

GS08/1.5K per 7" reel (12 mm tape), 12K/box

Absolute Maximum Ratings

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Zener current (see Table "Characteristics")				
Power dissipation		P_{tot}	1 ¹⁾	W

Note:

¹⁾ Valid provided that electrodes are kept at ambient temperature.

Thermal Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Thermal resistance junction to ambient air		R_{thJA}	170 ¹⁾	K/W
Junction temperature		T_j	175	$^{\circ}\text{C}$
Storage temperature		T_{stg}	- 65 to + 175	$^{\circ}\text{C}$

Note:

¹⁾ Valid provided that electrodes are kept at ambient temperature.

ZM4728A to ZM4764A



Vishay Semiconductors

Electrical Characteristics

Part number	Nominal Zener voltage ¹⁾	Test current	Maximum dynamic impedance			Maximum reverse leakage current		Surge current ³⁾	Maximum regulator current ²⁾
	V_Z at I_{ZT}	I_{ZT}	Z_{ZT} at I_{ZT}	Z_{ZK} at I_{ZK}	I_{ZK}	I_R	Test voltage V_R	at $T_A = 25\text{ }^\circ\text{C}$ I_R	I_{ZM}
	V	mA	Ω	Ω	mA	μA	V	mA	mA
ZM4728A	3.3	76	10	400	1	100	1	1380	276
ZM4729A	3.6	69	10	400	1	100	1	1260	252
ZM4730A	3.9	64	9	400	1	50	1	1190	234
ZM4731A	4.3	58	9	400	1	10	1	1070	217
ZM4732A	4.7	53	8	500	1	10	1	970	193
ZM4733A	5.1	49	7	550	1	10	1	890	178
ZM4734A	5.6	45	5	600	1	10	2	810	162
ZM4735A	6.2	41	2	700	1	10	3	730	146
ZM4736A	6.8	37	3.5	700	1	10	4	660	133
ZM4737A	7.5	34	4	700	0.5	10	5	605	121
ZM4738A	8.2	31	4.5	700	0.5	10	6	550	110
ZM4739A	9.1	28	5	700	0.5	10	7	500	100
ZM4740A	10	25	7	700	0.25	10	7.6	454	91
ZM4741A	11	23	8	700	0.25	5	8.4	414	83
ZM4742A	12	21	9	700	0.25	5	9.1	380	76
ZM4743A	13	19	10	700	0.25	5	9.9	344	69
ZM4744A	15	17	14	700	0.25	5	11.4	304	61
ZM4745A	16	15.5	16	700	0.25	5	12.2	285	57
ZM4746A	18	14	20	750	0.25	5	13.7	250	50
ZM4747A	20	12.5	22	750	0.25	5	15.2	225	45
ZM4748A	22	11.5	23	750	0.25	5	16.7	205	41
ZM4749A	24	10.5	25	750	0.25	5	18.2	190	38
ZM4750A	27	9.5	35	750	0.25	5	20.6	170	34
ZM4751A	30	8.5	40	1000	0.25	5	22.8	150	30
ZM4752A	33	7.5	45	1000	0.25	5	25.1	135	27
ZM4753A	36	7	50	1000	0.25	5	27.4	125	25
ZM4754A	39	6.5	60	1000	0.25	5	29.7	115	23
ZM4755A	43	6	70	1500	0.25	5	32.7	110	22
ZM4756A	47	5.5	80	1500	0.25	5	35.8	95	19
ZM4757A	51	5	95	1500	0.25	5	38.8	90	18
ZM4758A	56	4.5	110	2000	0.25	5	42.6	80	16
ZM4759A	62	4	125	2000	0.25	5	47.1	70	14
ZM4760A	68	3.7	150	2000	0.25	5	51.7	65	13
ZM4761A	75	3.3	175	2000	0.25	5	56	60	12
ZM4762A	82	3	200	3000	0.25	5	62.2	55	11
ZM4763A	91	2.8	250	3000	0.25	5	69.2	50	10
ZM4764A	100	2.5	350	3000	0.25	5	76	45	9

Notes:

- 1) The zener impedance is derived from the 1 kHz AC voltage which results when an AC current having an RMS value equal to 10 % of the zener current (I_{ZT} or I_{ZK}) is superimposed on I_{ZT} or I_{ZK} . Zener impedance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units
- 2) Valid provided that electrodes are kept at ambient temperature
- 3) Measured under thermal equilibrium and DC test conditions.

Typical Characteristics

$T_{amb} = 25\text{ }^{\circ}\text{C}$, unless otherwise specified


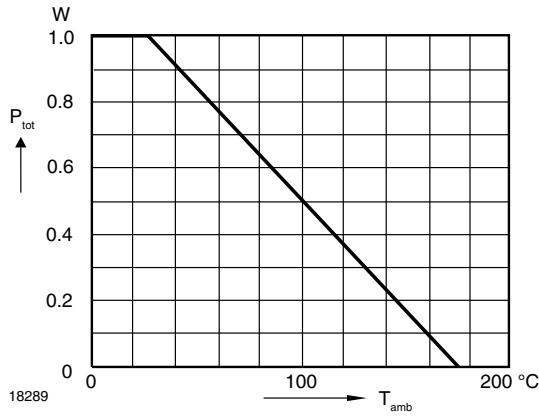



Figure 1. Admissible Power Dissipation vs. Ambient Temperature

Package Dimensions in millimeters (inches): MELF DO-213AB (glass)

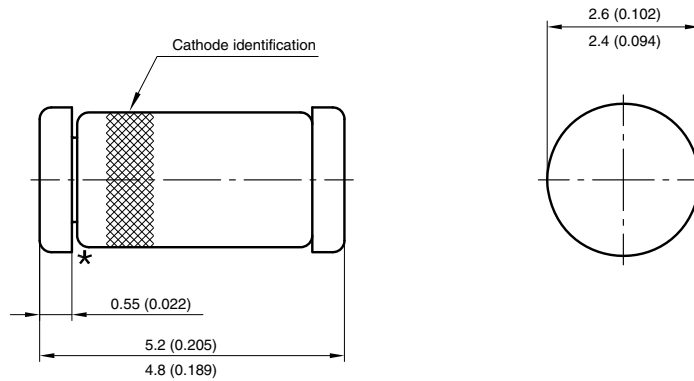

★ The gap between plug and glass can be either on cathode or anode side

Foot print recommendation:

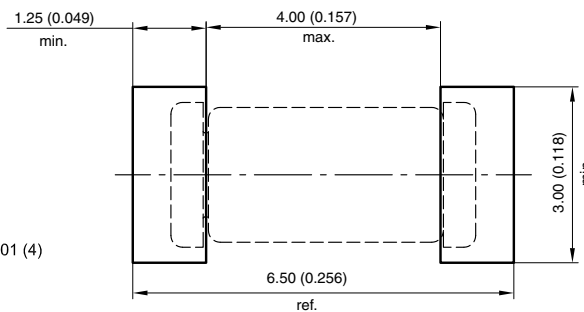

Document no.: S8-V-3453.02-001 (4)
 Rev. 3 - Date: 07 June 2006
 18317



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.