
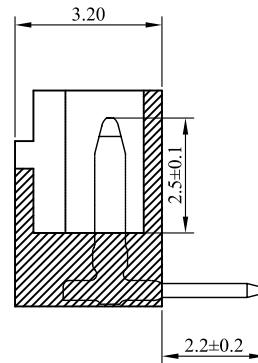


RECOMMENDED PC BOARD HOLE DIMM.

LOCKING WINDOW:
ONE PLACE FOR 2 AND 3 CKT.
AND TWO PLACES FOR MORE THAN 3 CKT.

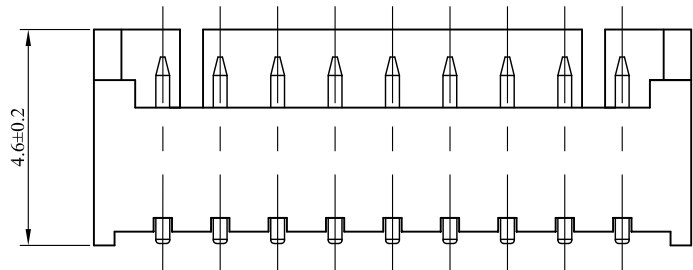


MATERIAL:

WAFER: HIGH TEMPERATURE PLASTIC
NYLON46 UL94V-0
PIN: HIGH STRENGTH BRASS
WITH TIN OVER NICKEL PLATED

SPECIFICATION:

CURRENT RATE: 1 AMP
INSULATION RESISTANCE: 500 MΩ MIN
CONTACT RESISTANCE: 20 MΩ MAX
DIELECTRIC VOLTAGE: 500 V AC FOR ONE MINUTE
OPERATION TEMPERATURE: -25°C TO +85°C

CKT.	A	B	C
2	1.25	3.15	4.25
3	2.50	4.40	5.50
4	3.75	5.65	6.75
5	5.00	6.90	8.00
6	6.25	8.15	9.25
7	7.50	9.40	10.50
8	8.75	10.65	11.75
9	10.00	11.90	13.00
10	11.25	13.15	14.25
11	12.50	14.40	15.50
12	13.75	15.65	16.75
13	15.00	16.90	18.00
14	16.25	18.15	19.25
15	17.50	19.40	20.50

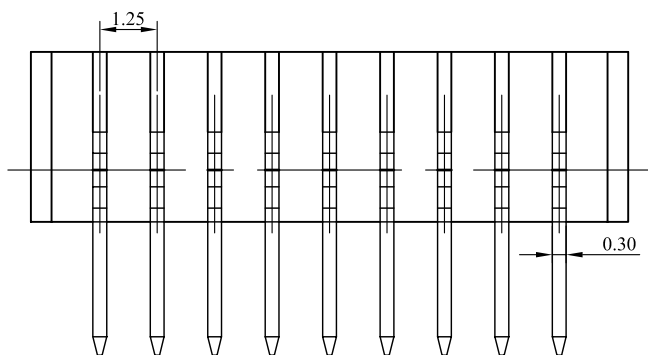

MORETHANALL
CONNECTORS
ASSEMBLIES

PART NO. FH-R-xx

DWG NO. FH-R-xx

FILE NO.

UNIT / mm

SCALE 1:1

APPROVED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X ± 0.5
.XX ± 0.1
.XXX
AWG

DESCRIPTION:

WIRE TO BOARD 1.25mm WAFER DIP 90°

AREA

REVISIONS

HK

DATE

焯倫有限公司