
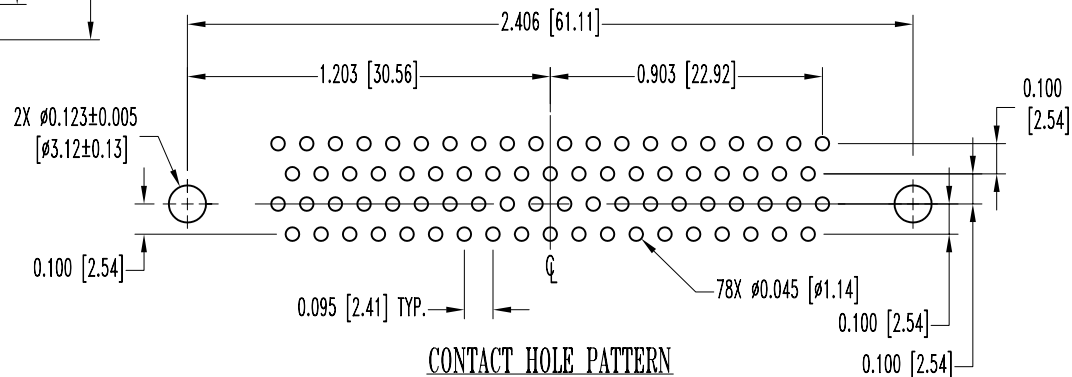
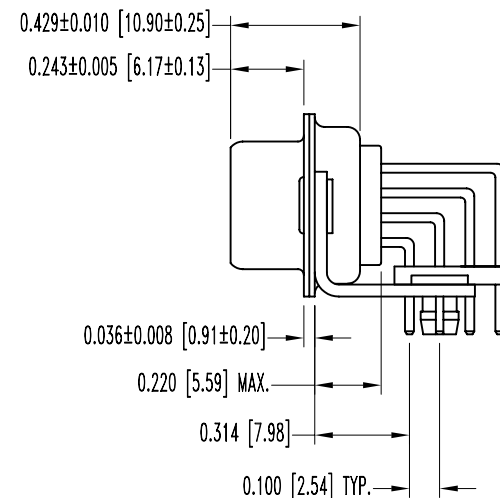
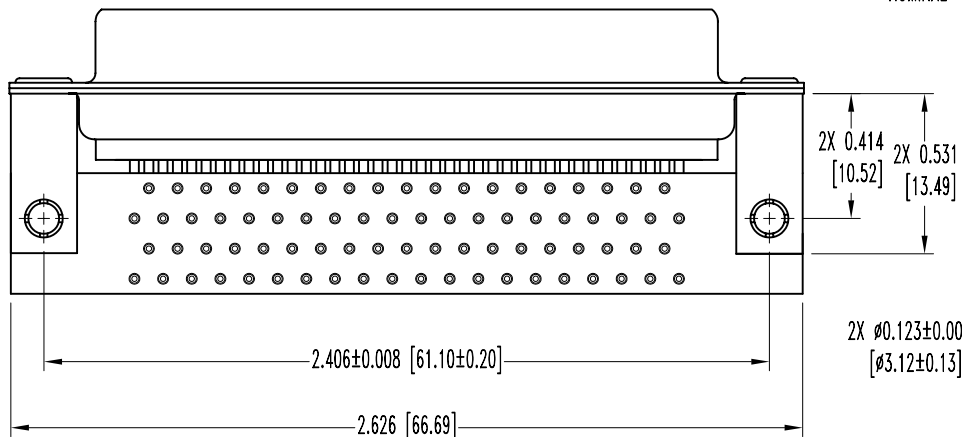


SK7929

POSITRONIC INDUSTRIES BELIEVES THE DATA ON THIS DRAWING TO BE RELIABLE. SINCE THE TECHNICAL INFORMATION IS GIVEN FREE OF CHARGE, THE USER EMPLOYS SUCH INFORMATION AT HIS OWN DISCRETION AND RISK. POSITRONIC INDUSTRIES ASSUMES NO RESPONSIBILITY FOR RESULTS OBTAINED OR DAMAGES INCURRED FROM USE OF SUCH INFORMATION IN WHOLE OR IN PART.

DATE	REV	REVISION RECORD	APP	DR	CK
8-30-06	NC	ECO 26592		YK	

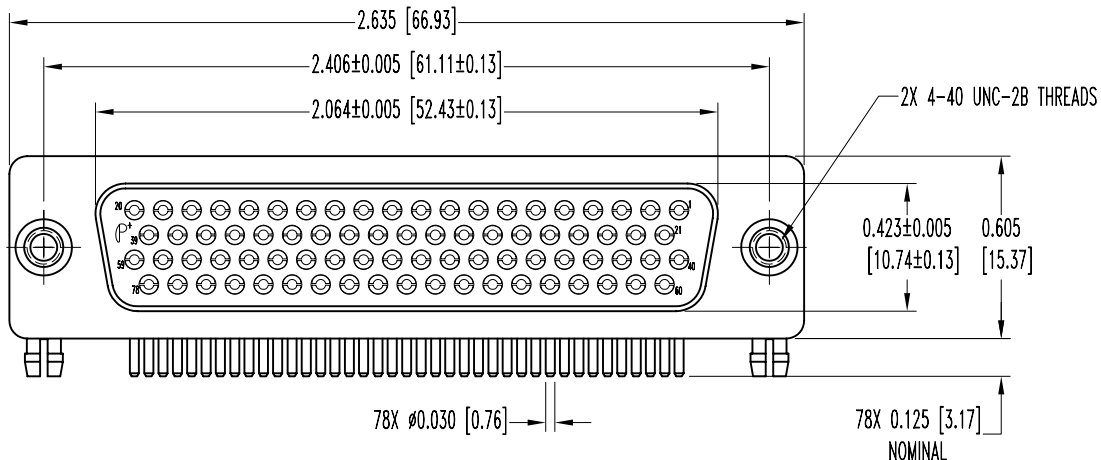

NOTES:

- MATERIALS AND FINISHES:**
 INSULATOR: GLASS FILLED POLYESTER PER MIL-M-24519, UL 94V-0, BLACK COLOR.
 CONTACTS: PRECISION MACHINED HIGH TENSILE PHOSPHOR BRONZE, GOLD FLASH OVER NICKEL PLATE.
 SHELLS: STEEL, TIN PLATE.
 RIVETS: BRASS, ZINC PLATE CHROMATE SEAL.
 MOUNTING BRACKETS: BRASS, TIN PLATE.
 PUSH FASTENERS: BERYLLIUM COPPER, TIN PLATE.
- ELECTRICAL CHARACTERISTICS:**
 CONTACT CURRENT RATING: 5 AMPERES NOMINAL.
 INITIAL CONTACT RESISTANCE: 0.010 OHMS MAXIMUM.
 PROOF VOLTAGE: 1000 V r.m.s.
 INSULATOR RESISTANCE: 5 G OHMS.
 WORKING VOLTAGE: 300 V r.m.s.
- TEMPERATURE RANGE: -55°C TO +125°C.**
- DIMENSIONS ARE IN INCHES [MILLIMETERS].**

		POSITRONIC INDUSTRIES INC. www.connectpositronic.com	
		DECIMAL TOL. ± 0.015 [0.38]	TITLE ODD78F4R7NOX
SCALE N.T.S.	DRAWN BY YK	DATE 8-30-06	DRAWING NUMBER SK7929
ANGULAR TOL. ± 5°	REV. NC		