

Ordering Information :

DHSL - $\frac{** * N L 2}{1 2}$

* * * DHSL Series * * *

* Insulator : UL 94V-0 PBT.

* Contact : Brass

1. No. of circuits

2. Plating :

U=Gold flash over 30~50 μ " nickel overall


W=15 μ " gold over 30~50 μ " nickel overall

Z=30 μ " gold over 30~50 μ " nickel overall

F>Selective gold flash over 30~50 μ " nickel overall

J=15 μ " gold plated selective over 30~50 μ " nickel overall

K=30 μ " gold plated selective over 30~50 μ " nickel overall

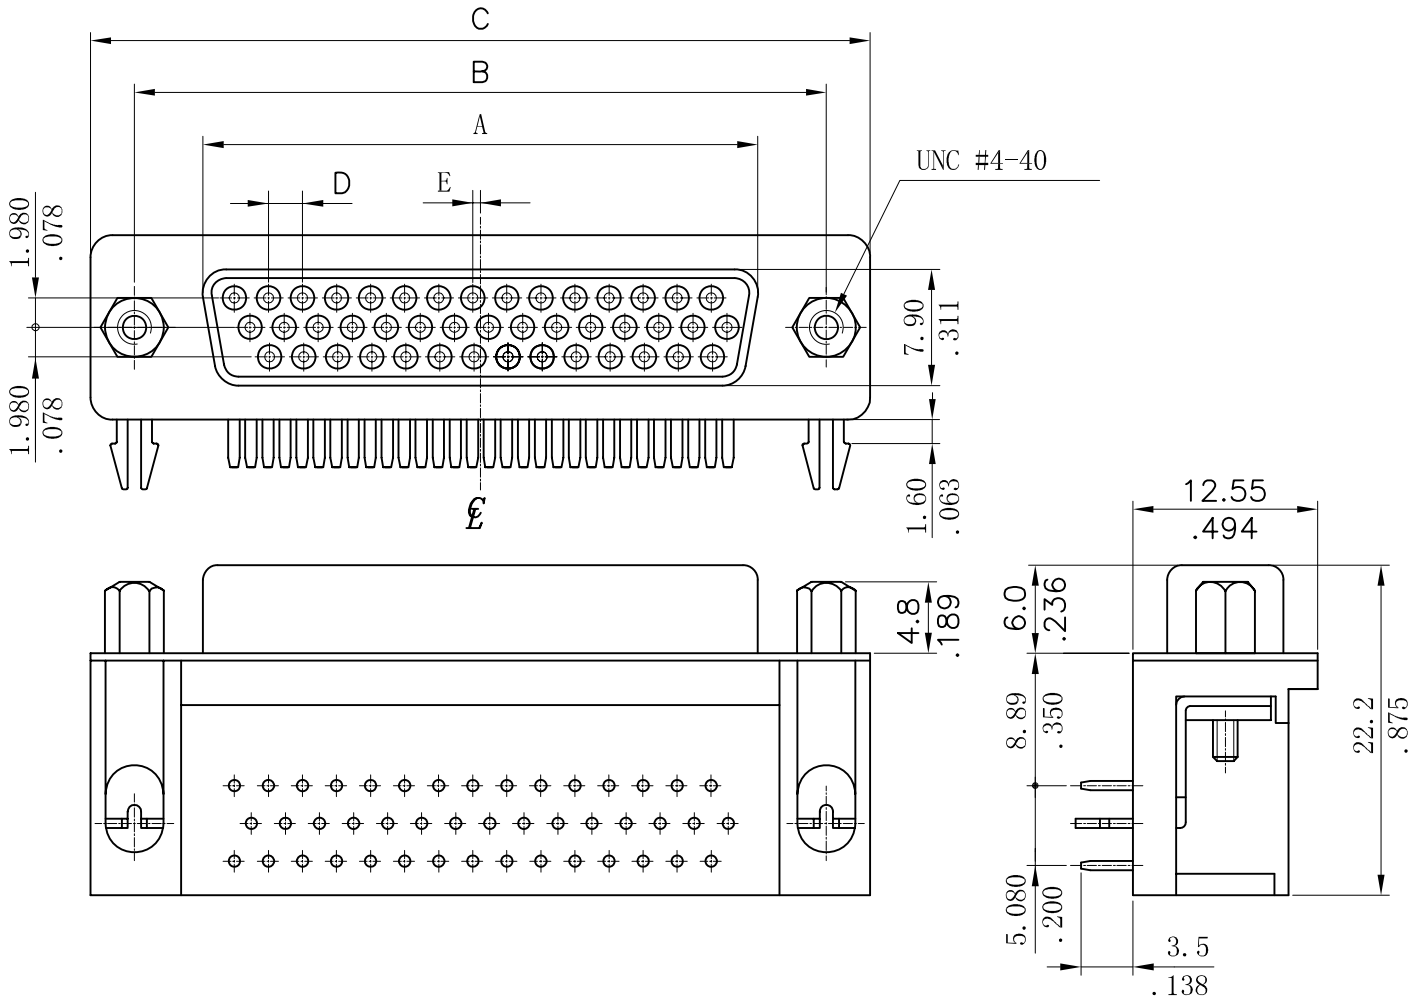

Circuits	Dim.A	Dim.B	Dim.C	Dim.D	Dim.E
15	16.33(0.643)	24.990(0.984)	30.8(1.213)	2.290(.090)	0.25(.010)
26	24.66(0.971)	33.320(1.312)	39.1(1.539)	2.290(.090)	0.51(.020)
44	38.38(1.511)	47.040(1.852)	53.0(2.087)	2.290(.090)	0.51(.020)
62	54.84(2.159)	63.500(2.500)	69.3(2.728)	2.410(.095)	0.58(.023)

				LECO LECO CORPORATION		APPROVED BY:		PART NO.: DHSL-***NL2					
D	E970333	PHIL			GENERAL TOLERANCE		CHECKED BY:		TITLE: PCB Mount High Density Socket Connector				
C	E970133				X. ±	X. ± 2°	DRAW BY:		DRAWING NO.: DHSL03S				
B	E960180				.X ± $\frac{0.30}{.012}$.X ±	PHIL						
A	DWG REL.				.XX ± $\frac{0.20}{.008}$.XX ±							
REV.	ECO. NO.	CHG	APPD.		.XXX ± $\frac{0.10}{.004}$.XXX ±			UNITS	SCALE	SIZE	SHEET	REV.
									mm	2:1	A4	1/1	D