

NEGATIVE FIXED VOLTAGE REGULATOR

DESCRIPTION

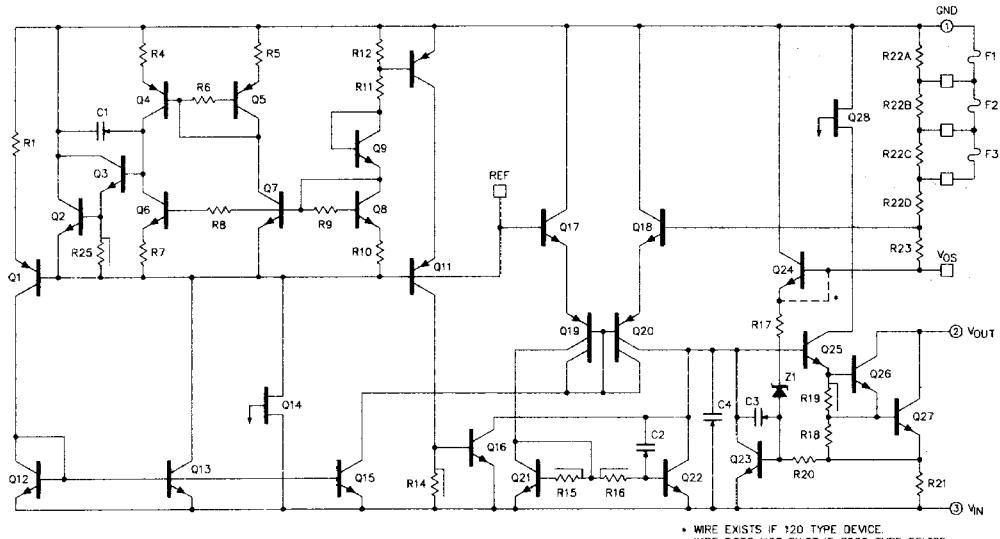
The SG120/320 series of negative regulators offer self-contained, fixed-voltage capability with up to 1.5A of load current. With a variety of output voltages and four package options this regulator series is an optimum complement to the SG7800A/7800/120/320 line of three terminal regulators.

All protective features of thermal shutdown, current limiting, and safe-area control have been designed into these units and since these regulators require only a single output capacitor or a capacitor and 5mA minimum load for satisfactory performance, ease of application is assured.

Although designed as fixed-voltage regulators, the output voltage can be increased through the use of a simple voltage divider. The low quiescent drain current of the device insures good regulation when this method is used, especially for the SG120 series. Utilizing an improved Bandgap reference design, problems have been eliminated that are normally associated with the zener diode references, such as drift in output voltage and large changes in the line and load regulation.

These devices are available in hermetically sealed TO-220 (both isolated and non-isolated), TO-3, TO-39 and TO-66 power packages as well as the plastic commercial power TO-220 package.

SCHEMATIC DIAGRAM



ABSOLUTE MAXIMUM RATINGS (Note 1)

Device Output Voltage	Input Voltage	Input Voltage Differential (Output shorted to ground)
-5V	-35V	35V
-5.2V	-35V	35V
-8V	-35V	35V
-12V	-35V	35V
-15V	-40V	35V
-18V	-40V	35V
-20V	-40V	35V

Operating Junction Temperature

Hermetic (K, R, G, IG - Packages) 175°C

Plastic (P - Package) 150°C

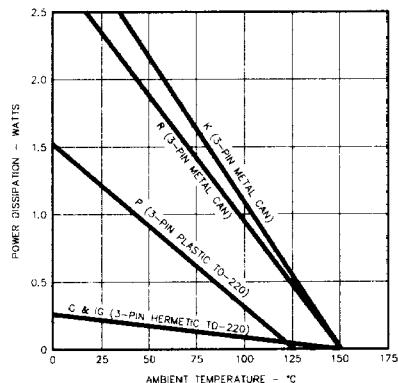
Note 1. Values beyond which damage may occur.

Storage Temperature Range -65°C to 150°C

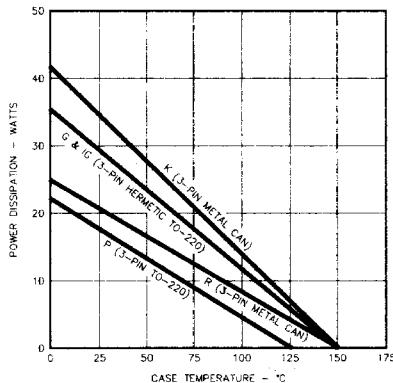
Lead Temperature (Soldering, 10 Seconds) 300°C

RECOMMENDED OPERATING CONDITIONS (Note 2)

THERMAL



MAXIMUM POWER DISSIPATION vs AMBIENT TEMPERATURE



MAXIMUM POWER DISSIPATION vs CASE TEMPERATURE

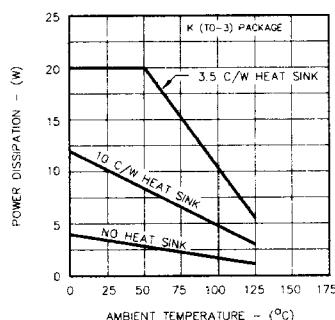
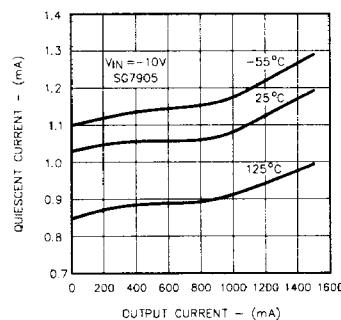
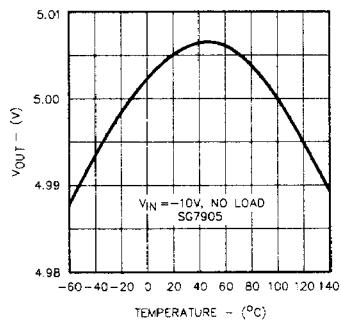
ELECTRICAL

Operating Junction Temperature Range:

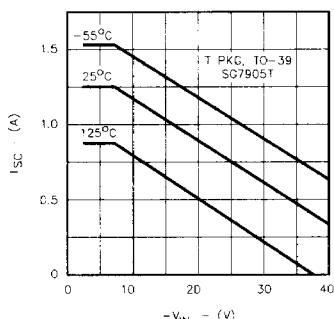
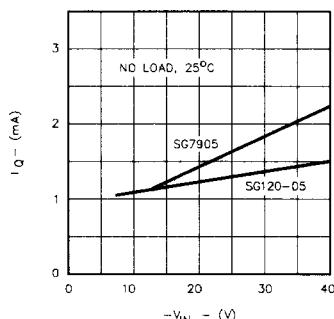
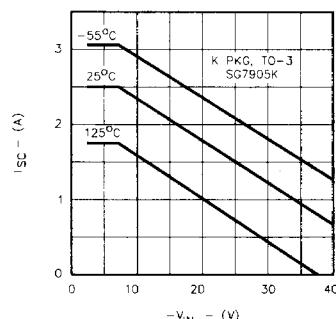
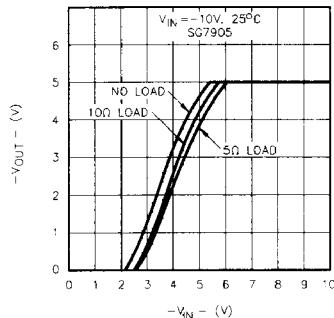
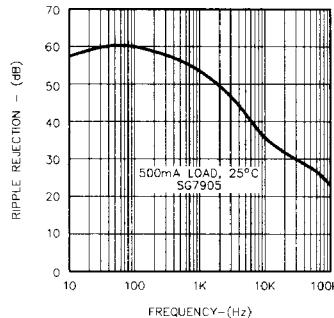
SG120 -55°C to 150°C

SG320 0°C to 125°C

Note 2. Range over which the device is functional.

CHARACTERISTIC CURVESFIGURE 1.
MAXIMUM AVERAGE POWER DISSIPATIONFIGURE 2.
QUIESCENT CURRENT VS. LOADFIGURE 3.
TEMPERATURE COEFFICIENT

CHARACTERISTIC CURVES (continued)

FIGURE 4.
SHORTCIRCUIT CURRENT VS. V_{IN} FIGURE 5.
QUIESCENT CURRENT VS. V_{IN} FIGURE 6.
SHORT CIRCUIT CURRENT VS. V_{IN} FIGURE 7.
DROPOUT CHARACTERISTICSFIGURE 8.
RIPPLE REJECTION VS. FREQUENCY

APPLICATIONS

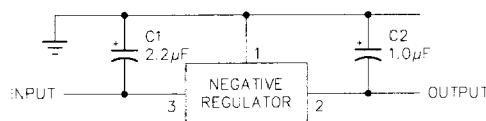


FIGURE 9 - FIXED OUTPUT REGULATOR

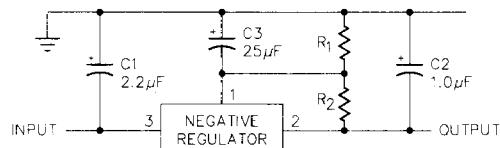


FIGURE 10 - CIRCUIT FOR INCREASING OUTPUT VOLTAGE

- NOTE: 1. C1 is required only if regulator is separated from rectifier filter.
 2. Both C1 and C2 should be low E.S.R. types such as solid tantalum. If aluminum electrolytics are used, at least 10 times values shown should be selected.
 3. If large output capacities are used, the regulators must be protected from momentary input shorts. A high current diode from output to input will suffice.

NOTE: C3 optional for improved transient response and ripple rejection.

$$V_{OUT} = V_{(REGULATOR)} \frac{R_1 + R_2}{R_1} \quad R_2 = \frac{V_{(REG)}}{15mA}$$

SG120/SG320**-5.0V & -5.2V NEGATIVE REGULATOR****ELECTRICAL SPECIFICATIONS** (Note 1)**SG120-05/SG320-05**

(Unless otherwise specified, these specifications apply for $V_{IN} = -10V$, $I_O = 5mA$, $C_{IN} = 2\mu F$, $C_{OUT} = 1.0\mu F$, over the recommended operating temperatures, and are applicable for the P, K, R, G, IG-Power Packages only.)

Parameter	Test Conditions	SG120-05			SG320-05			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Output Voltage	$T_J = 25^\circ C$	-4.9	5.0	-5.1	-4.8	-5.0	-5.2	V
Line Regulation (Note 1)	$V_{IN} = -7V$ to $-25V$, $T_J = 25^\circ C$	10	25		10	40		mV
Load Regulation (Note 1)	Power Pkgs: $I_O = 5mA$ to $1.5A$, $T_J = 25^\circ C$ T - Pkg: $I_O = 5mA$ to $500mA$, $T_J = 25^\circ C$	50	75		60	100		mV
Total Output Voltage Tolerance	$V_{IN} = -7.5V$ to $-25V$ Power Pkgs: $I_O = 5mA$ to $1.5A$, $P \leq 20W$ T - Pkg: $I_O = 5mA$ to $500mA$, $P \leq 2W$	30	50		30	50		mV
Quiescent Current	$V_{IN} = -7V$ to $-25V$				2		2	mA
Quiescent Current Change	With Line: $V_{IN} = -7V$ to $-25V$, $T_J = 25^\circ C$ With Load: $T_J = 25^\circ C$ Power Pkgs: $I_O = 5mA$ to $1.5A$ T - Pkg: $I_O = 5mA$ to $500mA$			0.4			0.4	mA
Dropout Voltage	$\Delta V_O = 100mV$, $T_J = 25^\circ C$ Power Pkgs: $I_O = 1.0A$, $T - Pkg:$ $I_O = 500mA$			1.1	2.3		1.1	V
Peak Output Current	Power Pkgs: $T_J = 25^\circ C$ T - Pkg: $T_J = 25^\circ C$	1.5	3.3		1.5		3.3	A
Short Circuit Current	$V_{IN} = -35V$, $T_J = 25^\circ C$ T - Pkg: $V_{IN} = -35V$, $T_J = 25^\circ C$	0.5		1.4			1.4	A
Ripple Rejection	$\Delta V_{IN} = 10V$, $f = 120Hz$, $T_J = 25^\circ C$	54			54			dB
Output Noise Voltage (rms)	$f = 10Hz$ to $100KHz$ (Note 2)		25	80		25	80	$\mu V/V$
Long Term Stability	$1000hrs.$ at $T_J = 125^\circ C$		20			20		mV
Thermal Shutdown	$I_O = 5mA$		175			175		$^\circ C$

SG120-5.2/SG320-5.2

(Unless otherwise specified, these specifications apply for $V_{IN} = -10V$, $I_O = 5mA$, $C_{IN} = 2\mu F$, $C_{OUT} = 1.0\mu F$, over the recommended operating temperatures, and are applicable for the P, K, R, G, IG-Power Packages only.)

Parameter	Test Conditions	SG120-5.2			SG320-5.2			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Output Voltage	$T_J = 25^\circ C$	-5.1	5.2	-5.3	-5.0	-5.2	-5.4	V
Line Regulation (Note 1)	$V_{IN} = -7.2V$ to $-25V$, $T_J = 25^\circ C$	15	25		10	40		mV
Load Regulation (Note 1)	Power Pkgs: $I_O = 5mA$ to $1.5A$, $T_J = 25^\circ C$ T - Pkg: $I_O = 5mA$ to $500mA$, $T_J = 25^\circ C$	50	75		60	100		mV
Total Output Voltage Tolerance	$V_{IN} = -7.7V$ to $-25V$ Power Pkgs: $I_O = 5mA$ to $1.5A$, $P \leq 20W$ T - Pkg: $I_O = 5mA$ to $500mA$, $P \leq 2W$	30	50		30	50		mV
Quiescent Current	$V_{IN} = -7.2V$ to $-25V$ With Line: $V_{IN} = -7.2V$ to $-25V$, $T_J = 25^\circ C$ With Load: $T_J = 25^\circ C$ Power Pkgs: $I_O = 5mA$ to $1.5A$ T - Pkg: $I_O = 5mA$ to $500mA$			2		2		mA
Quiescent Current Change				0.4			0.4	mA
Dropout Voltage	$\Delta V_O = 100mV$, $T_J = 25^\circ C$ Power Pkgs: $I_O = 1.5A$, $T - Pkg:$ $I_O = 500mA$			1.1	2.3		1.1	V
Peak Output Current	Power Pkgs: $T_J = 25^\circ C$ T - Pkg: $T_J = 25^\circ C$	1.5	3.3		1.5		3.3	A
Short Circuit Current	$V_{IN} = -35V$, $T_J = 25^\circ C$ T - Pkg: $V_{IN} = -35V$, $T_J = 25^\circ C$	0.5		1.4	0.5		1.4	A
Ripple Rejection	$\Delta V_{IN} = 10V$, $f = 120Hz$, $T_J = 25^\circ C$	54			54			dB
Output Noise Voltage (rms)	$f = 10Hz$ to $100KHz$ (Note 2)		25	80		25	80	$\mu V/V$
Long Term Stability	$1000hrs.$ at $T_J = 125^\circ C$		20			20		mV
Thermal Shutdown	$I_O = 5mA$		175			175		$^\circ C$

Note 1. All regulation tests are made at constant junction temperature with low duty cycle testing.

2. This test is guaranteed but is not tested in production.

SG120/SG320**-8V & -12V NEGATIVE REGULATOR****ELECTRICAL SPECIFICATIONS** (Note 1)**SG120-08/SG320-08**

(Unless otherwise specified, these specifications apply for $V_{IN} = -14V$, $I_O = 5mA$, $C_{IN} = 2\mu F$, $C_{OUT} = 1.0\mu F$, over the recommended operating temperatures, and are applicable for the P, K, R, G, IG -Power Packages- only.)

Parameter	Test Conditions	SG120-8			SG320-8			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Output Voltage	$T_J = 25^\circ C$	-7.8	-8.0	-8.2	-7.7	-8.0	-8.3	V
Line Regulation (Note 1)	$V_{IN} = -10.5V$ to $-25V$, $T_J = 25^\circ C$	10	25		10	40		mV
Load Regulation (Note 1)	Power Pkgs: $I_O = 5mA$ to $1.5A$, $T_J = 25^\circ C$	20	80		20	100		mV
	T - Pkg: $I_O = 5mA$ to $500mA$, $T_J = 25^\circ C$	10	25		10	40		mV
Total Output Voltage Tolerance	$V_{IN} = -10.5V$ to $-25V$							
	Power Pkgs: $I_O = 5mA$ to $1.5A$, $P \leq 20W$	-7.65	-8.00	-8.35	-7.6	-8.0	-8.4	V
	T - Pkg: $I_O = 5mA$ to $500mA$, $P \leq 2W$	-7.65	-8.00	-8.35	-7.6	-8.0	-8.4	V
Quiescent Current	$V_{IN} = -10.5V$ to $-25V$				2		2	mA
Quiescent Current Change	With Line: $V_{IN} = -10.5V$ to $-25V$, $T_J = 25^\circ C$				0.4		0.4	mA
	With Load: $T_J = 25^\circ C$							
	Power Pkgs: $I_O = 5mA$ to $1.5A$				0.4		0.4	mA
	T - Pkg: $I_O = 5mA$ to $500mA$				0.4		0.4	mA
Dropout Voltage	$\Delta V_O = 100mV$, $T_J = 25^\circ C$							
	Power Pkgs: $I_O = 1.0A$, T - Pkg: $I_O = 500mA$	1.1	2.3		1.1	2.3		V
Peak Output Current	$T_J = 25^\circ C$	1.5		3.3	1.5		3.3	A
	T - Pkg: $T_J = 25^\circ C$	0.5		1.4	0.5		1.4	A
Short Circuit Current	$V_{IN} = -35V$, $T_J = 25^\circ C$				1.2		1.2	A
	T - Pkg: $V_{IN} = -35V$, $T_J = 25^\circ C$				0.6		0.6	A
Ripple Rejection	$\Delta V_{IN} = 10V$, $f = 120Hz$, $T_J = 25^\circ C$	54			54			dB
Output Noise Voltage (rms)	$f = 10Hz$ to $100KHz$ (Note 2)	25	80		25	80		$\mu V/V$
Long Term Stability	1000hrs. at $T_J = 125^\circ C$	32			32			mV
Thermal Shutdown	$I_O = 5mA$				175		175	$^\circ C$

SG120-12/SG320-12

(Unless otherwise specified, these specifications apply for $V_{IN} = -17V$, $I_O = 5mA$, $C_{IN} = 2\mu F$, $C_{OUT} = 1.0\mu F$, over the recommended operating temperatures, and are applicable for the P, K, R, G, IG -Power Packages- only.)

Parameter	Test Conditions	SG120-12			SG320-12			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Output Voltage	$T_J = 25^\circ C$	-11.7	-12.0	-12.3	-11.6	-12.0	-12.4	V
Line Regulation (Note 1)	$V_{IN} = -14V$ to $-32V$, $T_J = 25^\circ C$	4	10		4	20		mV
Load Regulation (Note 1)	Power Pkgs: $I_O = 5mA$ to $1.0A$, $T_J = 25^\circ C$	30	80		30	80		mV
	T - Pkg: $I_O = 5mA$ to $500mA$, $T_J = 25^\circ C$	10	25		10	40		mV
Total Output Voltage Tolerance	$V_{IN} = -14.5V$ to $-32V$							
	Power Pkgs: $I_O = 5mA$ to $1.0A$, $P \leq 20W$	-11.5	-12.0	-12.5	-11.4	-12.0	-12.4	V
	T - Pkg: $I_O = 5mA$ to $500mA$, $P \leq 2W$	-11.5	-12.0	-12.5	-11.4	-12.0	-12.4	V
Quiescent Current	$V_{IN} = -14V$ to $-32V$				2	4		mA
Quiescent Current Change	With Line: $V_{IN} = -14V$ to $-32V$, $T_J = 25^\circ C$				0.4		0.4	mA
	With Load: $T_J = 25^\circ C$							
	Power Pkgs: $I_O = 5mA$ to $1.0A$				0.4		0.4	mA
	T - Pkg: $I_O = 5mA$ to $500mA$				0.4		0.4	mA
Dropout Voltage	$\Delta V_O = 100mV$, $T_J = 25^\circ C$							
	Power Pkgs: $I_O = 1.0A$, T - Pkg: $I_O = 500mA$	1.1	2.3		1.1	2.3		V
Peak Output Current	$T_J = 25^\circ C$	1.5		3.3	1.5		3.3	A
	T - Pkg: $T_J = 25^\circ C$	0.5		1.4	0.5		1.4	A
Short Circuit Current	$V_{IN} = -35V$, $T_J = 25^\circ C$				1.2		1.2	A
	T - Pkg: $V_{IN} = -35V$, $T_J = 25^\circ C$				0.6		0.6	A
Ripple Rejection	$\Delta V_{IN} = 10V$, $f = 120Hz$, $T_J = 25^\circ C$	56			56			dB
Output Noise Voltage (rms)	$f = 10Hz$ to $100KHz$ (Note 2)	25	80		25	80		$\mu V/V$
Long Term Stability	1000hrs. at $T_J = 125^\circ C$	48			48			mV
Thermal Shutdown	$I_O = 5mA$				175		175	$^\circ C$

Note 1. All regulation tests are made at constant junction temperature with low duty cycle testing.

2. This test is guaranteed but is not tested in production.

SG120/SG320**-15V & -18V NEGATIVE REGULATOR****ELECTRICAL SPECIFICATIONS** (Note 1)**SG120-15/SG320-15**

(Unless otherwise specified, these specifications apply for $V_{IN} = -20V$, $I_O = 5mA$, $C_{IN} = 2\mu F$, $C_{OUT} = 1.0\mu F$, over the recommended operating temperatures, and are applicable for the P, K, R, G, IG -Power Packages- only.)

Parameter	Test Conditions	SG120-15			SG320-15			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Output Voltage	$T_J = 25^\circ C$	-14.7	-15.0	-15.3	-14.6	-15.0	-15.4	V
Line Regulation (Note 1)	$V_{IN} = -17V$ to $-35V$, $T_J = 25^\circ C$	5	10		5	20	mV	
Load Regulation (Note 1)	Power Pkgs: $I_O = 5mA$ to $1.0A$, $T_J = 25^\circ C$	30	80		30	80	mV	
	T - Pkg: $I_O = 5mA$ to $500mA$, $T_J = 25^\circ C$	10	25		10	40	mV	
Total Output Voltage Tolerance	$V_{IN} = -17.5V$ to $-35V$							
	Power Pkgs: $I_O = 5mA$ to $1.0A$, $P \leq 20W$	-14.5	-15.0	-15.5	-14.4	-15.0	-15.6	V
	T - Pkg: $I_O = 5mA$ to $500mA$, $P \leq 2W$	-14.5	-15.0	-15.5	-14.4	-15.0	-15.6	V
Quiescent Current	$V_{IN} = -17V$ to $-35V$	2	4		2	4	mA	
Quiescent Current Change	With Line: $V_{IN} = -17V$ to $-35V$, $T_J = 25^\circ C$		0.4			0.4	mA	
	With Load: $T_J = 25^\circ C$							
	Power Pkgs: $I_O = 5mA$ to $1.0A$		0.4			0.4	mA	
	T - Pkg: $I_O = 5mA$ to $500mA$		0.4			0.4	mA	
Dropout Voltage	$\Delta V_O = 100mV$, $T_J = 25^\circ C$							
	Power Pkgs: $I_O = 1.0A$, T - Pkg: $I_O = 500mA$	1.1	2.3		1.1	2.3	V	
Peak Output Current	Power Pkgs: $T_J = 25^\circ C$	1.5	3.3	1.5		3.3	A	
	T - Pkg: $T_J = 25^\circ C$	0.5	1.4	0.5		1.4	A	
Short Circuit Current	Power Pkgs: $V_{IN} = -35V$, $T_J = 25^\circ C$		1.2			1.2	A	
	T - Pkg: $V_{IN} = -35V$, $T_J = 25^\circ C$		0.6			0.6	A	
Ripple Rejection	$\Delta V_{IN} = 10V$, $f = 120Hz$, $T_J = 25^\circ C$	56			56		dB	
Output Noise Voltage (rms)	$f = 10Hz$ to $100KHz$ (Note 2)		25	80		25	80	$\mu V/V$
Long Term Stability	1000hrs. at $T_J = 125^\circ C$		60			60		mV
Thermal Shutdown	$I_O = 5mA$		175			175		°C

SG120-18/SG320-18

(Unless otherwise specified, these specifications apply for $V_{IN} = -27V$, $I_O = 5mA$, $C_{IN} = 2\mu F$, $C_{OUT} = 1.0\mu F$, over the recommended operating temperatures, and are applicable for the P, K, R, G, IG -Power Packages- only.)

Parameter	Test Conditions	SG120-18			SG320-18			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Output Voltage	$T_J = 25^\circ C$	-17.6	-18.0	-18.4	-17.4	-18.0	-18.6	V
Line Regulation (Note 1)	$V_{IN} = -21V$ to $-33V$, $T_J = 25^\circ C$	5	10		5	20	mV	
Load Regulation (Note 1)	Power Pkgs: $I_O = 5mA$ to $1.0A$, $T_J = 25^\circ C$	30	80		30	80	mV	
	T - Pkg: $I_O = 5mA$ to $500mA$, $T_J = 25^\circ C$	10	25		10	40	mV	
Total Output Voltage Tolerance	$V_{IN} = -22V$ to $-33V$							
	Power Pkgs: $I_O = 5mA$ to $1.0A$, $P \leq 20W$	-17.4	-18.0	-18.6	-17.1	-18.0	-18.9	V
	T - Pkg: $I_O = 5mA$ to $500mA$, $P \leq 2W$	-17.4	-18.0	-18.6	-17.1	-18.0	-18.9	V
Quiescent Current	$V_{IN} = -21V$ to $-33V$	2	4		2	4	mA	
Quiescent Current Change	With Line: $V_{IN} = -21V$ to $-33V$, $T_J = 25^\circ C$		0.4			0.4	mA	
	With Load: $T_J = 25^\circ C$							
	Power Pkgs: $I_O = 5mA$ to $1.0A$		0.4			0.4	mA	
	T - Pkg: $I_O = 5mA$ to $500mA$		0.4			0.4	mA	
Dropout Voltage	$\Delta V_O = 100mV$, $T_J = 25^\circ C$							
	Power Pkgs: $I_O = 1.0A$, T - Pkg: $I_O = 500mA$	1.1	2.3		1.1	2.3	V	
Peak Output Current	Power Pkgs: $T_J = 25^\circ C$	1.5	3.3	1.5		3.3	A	
	T - Pkg: $T_J = 25^\circ C$	0.5	1.4	0.5		1.4	A	
Short Circuit Current	Power Pkgs: $V_{IN} = -35V$, $T_J = 25^\circ C$		1.2			1.2	A	
	T - Pkg: $V_{IN} = -35V$, $T_J = 25^\circ C$		0.6			0.6	A	
Ripple Rejection	$\Delta V_{IN} = 10V$, $f = 120Hz$, $T_J = 25^\circ C$	56			56		dB	
Output Noise Voltage (rms)	$f = 10Hz$ to $100KHz$ (Note 2)		25			80		$\mu V/V$
Long Term Stability	1000hrs. at $T_J = 125^\circ C$		72			72		mV
Thermal Shutdown	$I_O = 5mA$		175			175		°C

Note 1. All regulation tests are made at constant junction temperature with low duty cycle testing.

2. This test is guaranteed but is not tested in production.

ELECTRICAL SPECIFICATIONS (Note 1)**SG120-20/SG320-20**




(Unless otherwise specified, these specifications apply for $V_{IN} = -29V$, $I_O = 5mA$, $C_{IN} = 2\mu F$, $C_{OUT} = 1.0\mu F$, over the recommended operating temperatures, and are applicable for the P, K, R, G, IG -Power Packages- only.)

Parameter	Test Conditions	SG120-20			SG320-20			Units
		Min.	Typ.	Max.	Min.	Typ.	Max.	
Output Voltage	$T_J = 25^\circ C$	-19.5	-20.0	-20.5	19.2	-20.0	-20.8	V
Line Regulation (Note 1)	$V_{IN} = -23V$ to $-35V$, $T_J = 25^\circ C$	5	10		5	20		mV
Load Regulation (Note 1)	Power Pkgs: $I_O = 5mA$ to $1.0A$, $T_J = 25^\circ C$ T - Pkg: $I_O = 5mA$ to $500mA$, $T_J = 25^\circ C$	30	80		30	80		mV
Total Output Voltage Tolerance	$V_{IN} = -24V$ to $-35V$ Power Pkgs: $I_O = 5mA$ to $1.0A$, $P \leq 20W$ T - Pkg: $I_O = 5mA$ to $500mA$, $P \leq 2W$	10	25		10	25		mV
Quiescent Current	$V_{IN} = -23V$ to $-35V$	2	4		2	4		mA
Quiescent Current Change	With Line: $V_{IN} = -23V$ to $-35V$, $T_J = 25^\circ C$ With Load: $T_J = 25^\circ C$ Power Pkgs: $I_O = 5mA$ to $1.0A$ T - Pkg: $I_O = 5mA$ to $500mA$		0.4			0.4		mA
Dropout Voltage	$\Delta V_O = 100mV$, $T_J = 25^\circ C$ Power Pkgs: $I_O = 1.0A$, T - Pkg: $I_O = 500mA$		1.1	2.3		1.1	2.3	V
Peak Output Current	Power Pkgs: $T_J = 25^\circ C$ T - Pkg: $T_J = 25^\circ C$	1.5	3.3	1.5	3.3			A
Short Circuit Current	Power Pkgs: $V_{IN} = -35V$, $T_J = 25^\circ C$ T - Pkg: $V_{IN} = -35V$, $T_J = 25^\circ C$	0.5	1.4	0.5	1.4			A
Ripple Rejection	$\Delta V_{IN} = 10V$, $f = 120Hz$, $T_J = 25^\circ C$	56			56			dB
Output Noise Voltage (rms)	$f = 10Hz$ to $100KHz$ (Note 2)		25	80		25	80	$\mu V/V$
Long Term Stability	1000hrs. at $T_J = 125^\circ C$		80			80		mV
Thermal Shutdown	$I_O = 5mA$		175			175		$^\circ C$

Note 1. All regulation tests are made at constant junction temperature with low duty cycle testing.

2. This test is guaranteed but is not tested in production.

CONNECTION DIAGRAMS & ORDERING INFORMATION (See Notes Below)

Package	Part No.	Ambient Temperature Range	Connection Diagram
3-Terminal TO-3 METAL CAN K-PACKAGE	SG120-XXX/883B SG120-XXX SG320-XXX	-55°C to 125°C -55°C to 125°C 0°C to 70°C	
3-Terminal TO-66 METAL CAN R-PACKAGE	SG120-XXR/883B SG120-XXR SG320-XXR	-55°C to 125°C -55°C to 125°C 0°C to 70°C	
3-Pin Plastic TO-220 P-PACKAGE	SG320-XXP	0°C to 70°C	
3-Pin HERMETIC TO-220 G-PACKAGE (Non-Isolated)	SG120-XXG/883B SG120-XXG	-55°C to 125°C -55°C to 125°C	
3-Pin HERMETIC TO-220 IG-PACKAGE (Isolated)	SG120-XXIG/883B SG120-XXIG	-55°C to 125°C -55°C to 125°C	

- Note
1. Contact factory for JAN and DESC product availability.
 2. All parts are viewed from the top.
 3. "XX" to be replaced by output voltage of specific fixed regulator.
 4. Some products will be available in leadless chip carrier (LCC) and hermetic flat pack (F). Consult factory for price and availability.