

CONNECTORS MANUFACTURE






Box Header 1.27x2.54mm SMT/Right Angle/Straight Type

Specifications





Current Rate:1 AMP
 Insulation Resistance:1000MΩ Min.
 Contact Resistance:20mΩ Max.
 Dielectric Voltage:500V AC for one minute
 Operation Temperature:-40°C to +105°C

Material




Insulator:Polyester,UL 94V-0
 ◎Standard:Nylon 6T
 Terminal:Copper Alloy
 Plating:Gold Plated

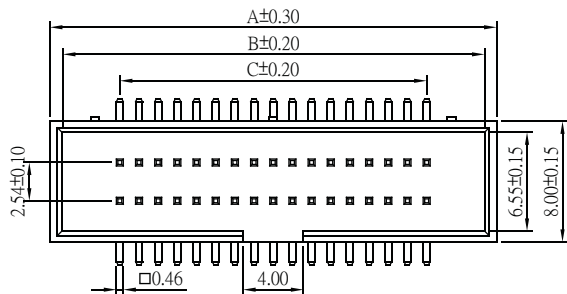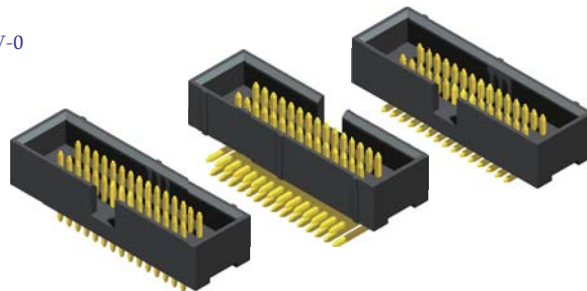


No. of Contacts	Dimensions		
	A	B	C
6	11.81	10.21	2.54
8	13.08	11.48	3.81
10	14.35	12.75	5.08
12	15.62	14.02	6.35
14	16.89	15.29	7.62
16	18.16	16.56	8.89
18	19.43	17.83	10.16
20	20.70	19.10	11.43
26	24.51	22.91	15.24
30	27.05	25.45	17.78
34	29.59	27.99	20.32
40	33.40	31.80	24.13
50	39.75	38.15	30.48
60	46.10	44.50	36.83
64	48.64	47.04	39.37

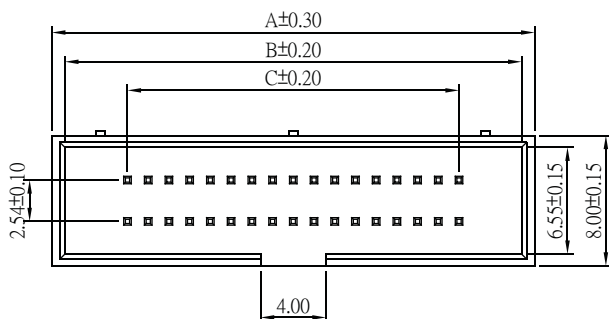

No. of Contacts	Dimensions		
	A	B	C
6	11.81	10.21	2.54
8	13.08	11.48	3.81
10	14.35	12.75	5.08
12	15.62	14.02	6.35
14	16.89	15.29	7.62
34	29.59	27.99	20.32
40	33.40	31.80	24.13
80	58.80	57.20	49.53
100	71.50	69.90	62.23

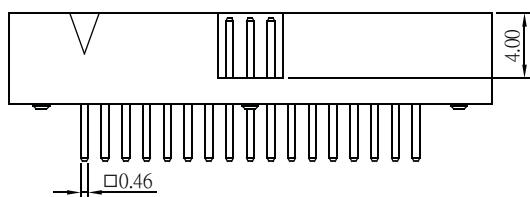

ORDER INFORMATION

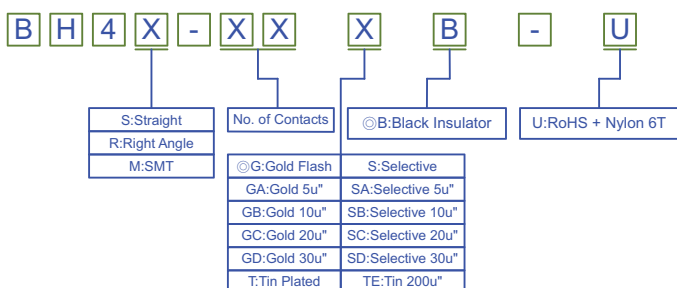

◎:Standard Recommended

Box Header 1.27mm

RoHS

CONNECTORS MANUFACTURE