

1137 Series 2.54 mm PIN Header Triple Row, Straight

Ordering Information

1137 - X X XX - XX S

Contact Plating

- A - Gold Flash
- B - 10 μ "
- C - 15 μ "
- G - 3 μ "
- 0 - Gold Flash /Tin 100 μ "
- 1 - 10 μ " /Tin 100 μ "
- 3 - 30 μ " /Tin 100 μ "
- 4 - 3 μ " /Tin 100 μ "
- 5 - 15 μ " /Tin 100 μ "
- 8 - Tin 100 μ "

PIN Type


SEE DIM. A, TABLE 1

Insulator Type

- 0 - 2.54mm High(PBT)
- H - pitch 3.96mm
- 1 - Triple type (PBT)
- 6 - Dual type(PBT)

S - Straight

NO. of Contact
 6-90 position

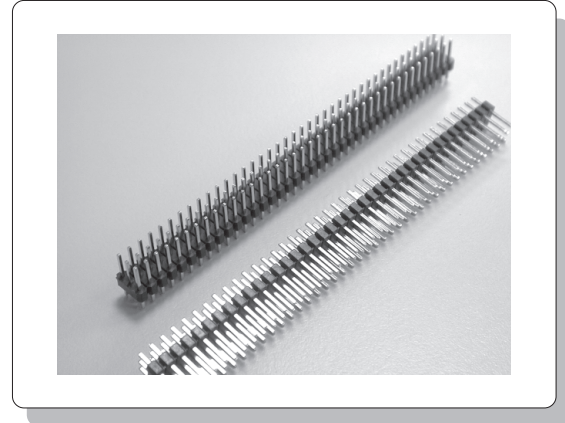

Specification

Materials:

- ◆ **Insulator:**
 Glass Fiber Reinforced Thermoplastic,
 UL94V-0.
- ◆ **Contact:** Copper Alloy 0.025" (0.64mm)
 square PIN.
- ◆ **Plating:** Dual Plate.

Electrical:

- ◆ **Insulation Resistance:**
 5000 M Ω Minimum.
- ◆ **Voltage Rating:** 250 VAC R.M.S.
- ◆ **Dielectrical Withstanding Voltage:**
 500 VAC R.M.S.
- ◆ **Current Rating:** 1 AMP.



Enviromental

- ◆ Temperature: -55 \square C to +125 \square C

❖ All Dimensions are shown in in/mm.
 ❖ The above ordering data is for our standard products.

For Non-Standard products, please contact TEKCON Electronics Corporation.


Dimensions

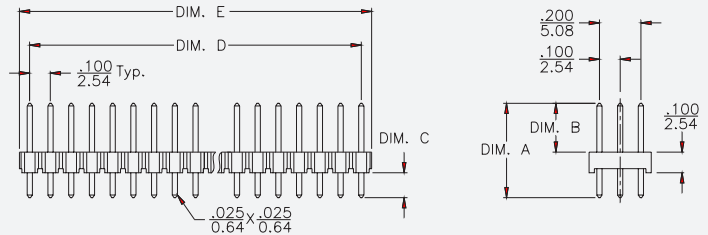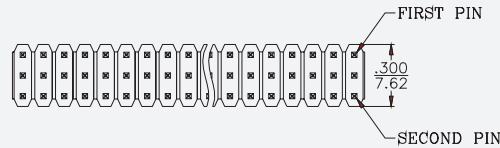

$$\text{DIM. D} = \frac{.100}{2.54\text{mm}} \times \langle \text{NO. OF SPACE} \rangle$$

$$\text{DIM. E} = \text{DIM. D} + \frac{.100}{2.54\text{mm}}$$

RECOMMENDED P.C.B. LAYOUT

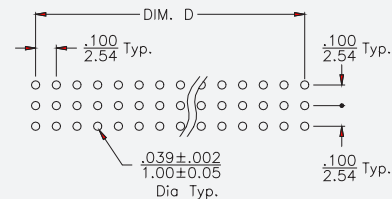

PRODUCT NO.	DIM. A		DIM. B		DIM. C	
	mm	in	mm	in	mm	in
1137-X058-XXS	11.60	0.457	6.00	0.236	3.06	0.120
1137-X060-XXS	10.24	0.403	4.70	0.185	3.00	0.118