

**TYPES SN54ALS257, SN54ALS258, SN54AS257, SN54AS258  
SN74ALS257, SN74ALS258, SN74AS257, SN74AS258  
QUADRUPLE 1 OF 8 DATA SELECTORS/MULTIPLEXERS WITH 3-STATE OUTPUTS**

D2661, APRIL 1982—REVISED DECEMBER 1983


- Three-State Outputs Interface Directly with System Bus
- Provides Bus Interface from Multiple Sources in High-Performance Systems
- Package Options Include Both Plastic and Ceramic Chip Carriers in Addition to Plastic and Ceramic DIPs
- Dependable Texas Instruments Quality and Reliability

**description**

These devices are designed to multiplex signals from four-bit data sources to four-output data lines in bus-organized systems. The 3-state outputs will not load the data lines when the output control pin ( $\bar{G}$ ) is at a high-logic level.


The SN54' family is characterized for operation over the full military temperature range of  $-55^{\circ}\text{C}$  to  $125^{\circ}\text{C}$ . The SN74' family is characterized for operation from  $0^{\circ}\text{C}$  to  $70^{\circ}\text{C}$ .

**logic symbols**

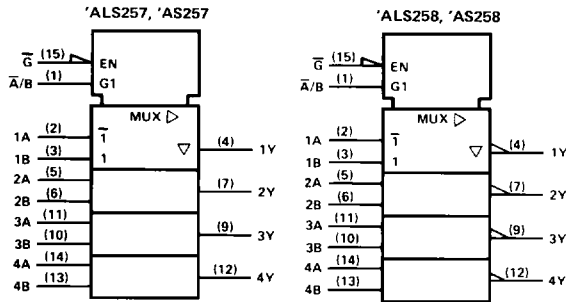


Pin numbers shown are for J and N packages.

SN54ALS', SN54AS' . . . J PACKAGE  
SN74ALS', SN74AS' . . . N PACKAGE  
(TOP VIEW)



SN54ALS', SN54AS' . . . FH PACKAGE  
SN74ALS', SN74AS' . . . FN PACKAGE  
(TOP VIEW)




FUNCTION TABLE

OUTPUT CONTROL $\bar{G}$	INPUTS		OUTPUT Y		
	SELECT $\bar{A}/\bar{B}$	DATA A B		'ALS257 'AS257	'ALS258 'AS258
H	X	X	X	Z	Z
L	L	L	X	L	H
L	L	H	X	H	L
L	H	X	L	L	H
L	H	X	H	H	L

**2**  
**ALS AND AS CIRCUITS**

**TYPES SN54ALS257, SN54ALS258, SN54AS257, SN54AS258  
 SN74ALS257, SN74ALS258, SN74AS257, SN74AS258  
 QUADRUPLE 1 OF 8 DATA SELECTORS/MULTIPLEXERS WITH 3-STATE OUTPUTS**

logic diagrams (positive logic)

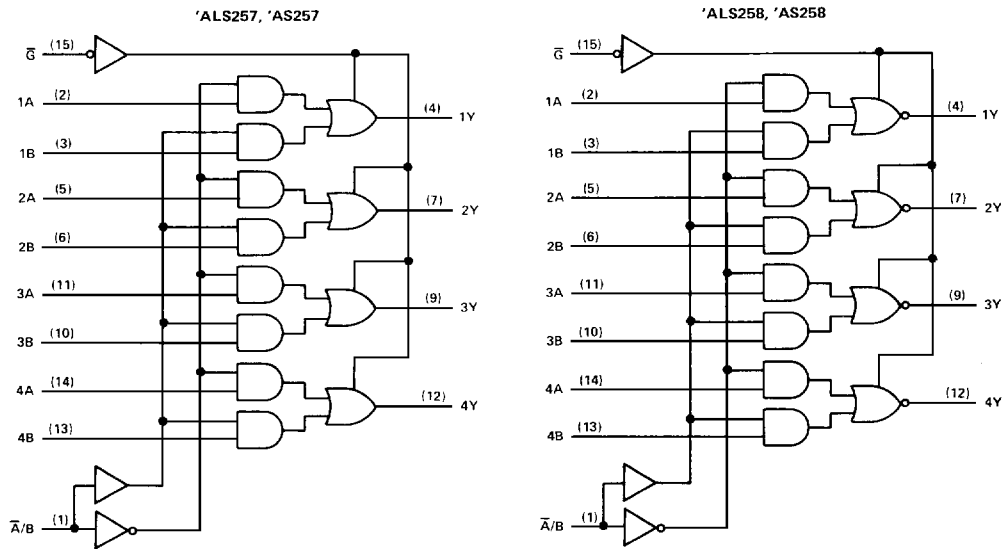

**2**

Pin numbers shown are for J and N packages.

**ALS AND AS CIRCUITS**

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)

Supply voltage, $V_{CC}$ .....	7 V
Input voltage .....	7 V
Voltage applied to a disabled 3-state output .....	5.5 V
Operating free-air temperature range: SN54ALS', SN54AS' .....	-55°C to 125°C
SN74ALS', SN74AS' .....	0°C to 70°C
Storage temperature range .....	-65°C to 150°C

**TYPES SN54ALS257, SN54ALS258, SN74ALS257, SN74ALS258  
QUADRUPLE 1 OF 8 DATA SELECTORS/MULTIPLEXERS WITH 3-STATE OUTPUTS**

**recommended operating conditions**

		SN54ALS257			SN74ALS257			UNIT
		SN54ALS258			SN74ALS258			
		MIN	NOM	MAX	MIN	NOM	MAX	
V <sub>CC</sub>	Supply voltage	4.5	5	5.5	4.5	5	5.5	V
V <sub>IH</sub>	High-level input voltage	2			2			V
V <sub>IL</sub>	Low-level input voltage							V
I <sub>OH</sub>	High-level output current	0.8			0.8			V
I <sub>OL</sub>	Low-level output current	-1			-2.6			mA
I <sub>OL</sub>	Low-level output current	12			24			mA
T <sub>A</sub>	Operating free-air temperature	-55		125	0		70	°C

**electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)**

PARAMETER	TEST CONDITIONS	SN54ALS257			SN74ALS257			UNIT	
		SN54ALS258			SN74ALS258				
		MIN	TYP <sup>†</sup>	MAX	MIN	TYP <sup>†</sup>	MAX		
V <sub>IK</sub>	V <sub>CC</sub> = 4.5 V, I <sub>I</sub> = -18 mA	-1.5			-1.5			V	
V <sub>OH</sub>	V <sub>CC</sub> = 4.5 V to 5.5 V, I <sub>OH</sub> = -0.4 mA	V <sub>CC</sub> - 2			V <sub>CC</sub> - 2			V	
	V <sub>CC</sub> = 4.5 V, I <sub>OH</sub> = -1 mA	2.4	3.3						
	V <sub>CC</sub> = 4.5 V, I <sub>OH</sub> = -2.6 mA				2.4	3.2			
V <sub>OL</sub>	V <sub>CC</sub> = 4.5 V, I <sub>OL</sub> = 12 mA	0.25	0.4	0.25 0.4			V		
	V <sub>CC</sub> = 4.5 V, I <sub>OL</sub> = 24 mA				0.35	0.5			
I <sub>OZH</sub>	V <sub>CC</sub> = 5.5 V, V <sub>O</sub> = 2.7 V	20			20			μA	
I <sub>OZL</sub>	V <sub>CC</sub> = 5.5 V, V <sub>O</sub> = 0.4 V	-20			-20			μA	
I <sub>I</sub>	V <sub>CC</sub> = 5.5 V, V <sub>I</sub> = 7 V	0.1			0.1			mA	
I <sub>IH</sub>	V <sub>CC</sub> = 5.5 V, V <sub>I</sub> = 2.7 V	20			20			μA	
I <sub>IL</sub>	V <sub>CC</sub> = 5.5 V, V <sub>I</sub> = 0.4 V	-0.1			-0.1			mA	
I <sub>O<sup>‡</sup></sub>	V <sub>CC</sub> = 5.5 V, V <sub>O</sub> = 2.25 V	-30		-112	-30		-112	mA	
I <sub>CC</sub>	'ALS257	V <sub>CC</sub> = 5.5 V	Outputs high		3	6	3	6	mA
			Outputs low		8	12	8	12	
			Outputs disabled		9	14	9	14	
	'ALS258	V <sub>CC</sub> = 5.5 V	Outputs high		2.5	4	2.5	4	
			Outputs low		7	11	7	11	
			Outputs disabled		8	13	8	13	

<sup>†</sup>All typical values are at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25°C.

<sup>‡</sup>The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, I<sub>OS</sub>.

**ALS AND AS CIRCUITS 2**

**TYPES SN54ALS257, SN54ALS258, SN74ALS257, SN74ALS258**  
**QUADRUPLE 1 OF 8 DATA SELECTORS/MULTIPLEXERS WITH 3-STATE OUTPUTS**

**'ALS257 switching characteristics (see Note 1)**

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V,}$ $C_L = 50 \text{ pF,}$ $R_1 = 500 \Omega,$ $R_2 = 500 \Omega,$ $T_A = \text{MIN to MAX}$				UNIT
			SN54ALS257		SN74ALS257		
			MIN	MAX	MIN	MAX	
$t_{PLH}$	A or B	Any Y	2	12	2	10	ns
$t_{PHL}$			3	14	3	12	
$t_{PLH}$	$\bar{A}/B$	Any Y	7	21	7	18	ns
$t_{PHL}$			6	25	6	22	
$t_{PZH}$	$\bar{G}$	Any Y	4	20	4	16	ns
$t_{PZL}$			5	22	5	18	
$t_{PHZ}$	$\bar{G}$	Any Y	2	12	2	10	ns
$t_{PLZ}$			4	18	4	15	

**'ALS258 switching characteristics (see Note 1)**

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V,}$ $C_L = 50 \text{ pF,}$ $R_1 = 500 \Omega,$ $R_2 = 500 \Omega,$ $T_A = \text{MIN to MAX}$				UNIT
			SN54ALS258		SN74ALS258		
			MIN	MAX	MIN	MAX	
$t_{PLH}$	A or B	Any Y	2	10	2	8	ns
$t_{PHL}$			2	9	2	7	
$t_{PLH}$	$\bar{A}/B$	Any Y	5	28	5	25	ns
$t_{PHL}$			8	23	8	20	
$t_{PZH}$	$\bar{G}$	Any Y	5	20	5	18	ns
$t_{PZL}$			5	20	5	18	
$t_{PHZ}$	$\bar{G}$	Any Y	2	12	2	10	ns
$t_{PLZ}$			5	20	5	18	

NOTE 1: For load circuit and voltage waveforms, see page 1-12.

**2 ALS AND AS CIRCUITS**

**TYPES SN54AS257, SN54AS258, SN74AS257, SN74AS258**  
**QUADRUPLE 1 OF 8 DATA SELECTORS/MULTIPLEXERS WITH 3-STATE OUTPUTS**

**recommended operating conditions**

	SN54AS257 SN54AS258			SN74AS257 SN74AS258			UNIT
	MIN	NOM	MAX	MIN	NOM	MAX	
V <sub>CC</sub> Supply voltage	4.5	5	5.5	4.5	5	5.5	V
V <sub>IH</sub> High-level input voltage	2			2			V
V <sub>IL</sub> Low-level input voltage			0.8			0.8	V
I <sub>OH</sub> High-level output current			-12			-15	mA
I <sub>OL</sub> Low-level output current			32			48	mA
T <sub>A</sub> Operating free-air temperature	-55		125	0		70	°C

**electrical characteristics over recommended operating free-air temperature range (unless otherwise noted)**

PARAMETER	TEST CONDITIONS	SN54AS257 SN54AS258			SN74AS257 SN74AS258			UNIT	
		MIN	TYP <sup>†</sup>	MAX	MIN	TYP <sup>†</sup>	MAX		
V <sub>IK</sub>	V <sub>CC</sub> = 4.5 V, I <sub>I</sub> = -18 mA			-1.2			-1.2	V	
V <sub>OH</sub>	V <sub>CC</sub> = 4.5 V to 5.5 V, I <sub>OH</sub> = -2 mA	V <sub>CC</sub> -2			V <sub>CC</sub> -2			V	
	V <sub>CC</sub> = 4.5 V, I <sub>OH</sub> = -12 mA	2.4	3.3						
	V <sub>CC</sub> = 4.5 V, I <sub>OH</sub> = -15 mA				2.4	3.2			
V <sub>OL</sub>	V <sub>CC</sub> = 4.5 V, I <sub>OL</sub> = 32 mA		0.25	0.5				V	
	V <sub>CC</sub> = 4.5 V, I <sub>OL</sub> = 48 mA				0.35	0.5			
I <sub>OZH</sub>	V <sub>CC</sub> = 5.5 V, V <sub>O</sub> = 2.7 V			50			50	μA	
I <sub>OZL</sub>	V <sub>CC</sub> = 5.5 V, V <sub>O</sub> = 0.4 V			-50			-50	μA	
I <sub>I</sub>	A, B or $\bar{G}$	V <sub>CC</sub> = 5.5 V, V <sub>I</sub> = 7 V			0.1		0.1	mA	
	$\bar{A}/\bar{B}$				0.2		0.2		
I <sub>IH</sub>	A, B, or $\bar{G}$	V <sub>CC</sub> = 5.5 V, V <sub>I</sub> = 2.7 V			20		20	μA	
	$\bar{A}/\bar{B}$				40		40		
I <sub>IL</sub>	A, B, or $\bar{G}$	V <sub>CC</sub> = 5.5 V, V <sub>I</sub> = 0.4 V			-0.5		-0.5	mA	
	$\bar{A}/\bar{B}$				-1		-1		
I <sub>O<sup>‡</sup></sub>	V <sub>CC</sub> = 5.5 V, V <sub>O</sub> = 2.25 V			-30		-112	-30	-112	mA
I <sub>CC</sub>	'AS257	V <sub>CC</sub> = 5.5 V	Outputs high	12.1	19.7		12.1	19.7	mA
			Outputs low	19	30.6		19	30.6	
			Outputs disabled	19.7	31.9		19.7	31.9	
	'AS258	V <sub>CC</sub> = 5.5 V	Outputs high	8.4	13.5		8.4	13.5	
			Outputs low	15.2	24.6		15.2	24.6	
			Outputs disabled	15.5	25.2		15.5	25.2	

<sup>†</sup>All typical values are at V<sub>CC</sub> = 5 V, T<sub>A</sub> = 25 °C.

<sup>‡</sup>The output conditions have been chosen to produce a current that closely approximates one half of the true short-circuit output current, I<sub>OS</sub>.

**ALS AND AS CIRCUITS**

**TYPES SN54AS257, SN54AS258, SN74AS257, SN74AS258**  
**QUADRUPLE 1 OF 8 DATA SELECTORS/MULTIPLEXERS WITH 3-STATE OUTPUTS**

**'AS257 switching characteristics (see Note 1)**

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V,}$ $C_L = 50 \text{ pF,}$ $R_1 = 500 \Omega,$ $R_2 = 500 \Omega,$ $T_A = \text{MIN to MAX}$				UNIT
			SN54AS257		SN74AS257		
			MIN	MAX	MIN	MAX	
$t_{PLH}$	A or B	Any Y	1	6.5	1	5.5	ns
$t_{PHL}$			1	7	1	6	
$t_{PLH}$	$\bar{A}/B$	Any Y	2	12	2	11	ns
$t_{PHL}$			2	10.5	2	10	
$t_{PZH}$	$\bar{G}$	Any Y	2	8.5	2	7.5	ns
$t_{PZL}$			2	10.5	2	9.5	
$t_{PHZ}$	$\bar{G}$	Any Y	1.5	8	1.5	6.5	ns
$t_{PLZ}$			2	8	2	7	

**'AS258 switching characteristics (see Note 1)**

PARAMETER	FROM (INPUT)	TO (OUTPUT)	$V_{CC} = 4.5 \text{ V to } 5.5 \text{ V,}$ $C_L = 50 \text{ pF,}$ $R_1 = 500 \Omega,$ $R_2 = 500 \Omega,$ $T_A = \text{MIN to MAX}$				UNIT
			SN54AS258		SN74AS258		
			MIN	MAX	MIN	MAX	
$t_{PLH}$	A or B	Any Y	1	5.5	1	5	ns
$t_{PHL}$			1	5	1	4	
$t_{PLH}$	$\bar{A}/B$	Any Y	2	11	2	9.5	ns
$t_{PHL}$			2	11	2	10	
$t_{PZH}$	$\bar{G}$	Any Y	2	8.5	2	8	ns
$t_{PZL}$			2	11	2	10	
$t_{PHZ}$	$\bar{G}$	Any Y	1.5	7	1.5	6	ns
$t_{PLZ}$			2	8.5	2	6.5	

NOTE 1: For load circuit and voltage waveforms, see page 1-12.

**2 ALS AND AS CIRCUITS**