


FEATURES

- TO-251AA Case : ECL06B025
- TO-252AA Case : ECL06B025 – F
Surface Mounting Device
Packaged in 16mm Tape and Reel
- Dual Diodes – Cathode Common
- Extremely Low Forward Voltage Drop
- Low Power Loss, High Efficiency
- High Surge Capability

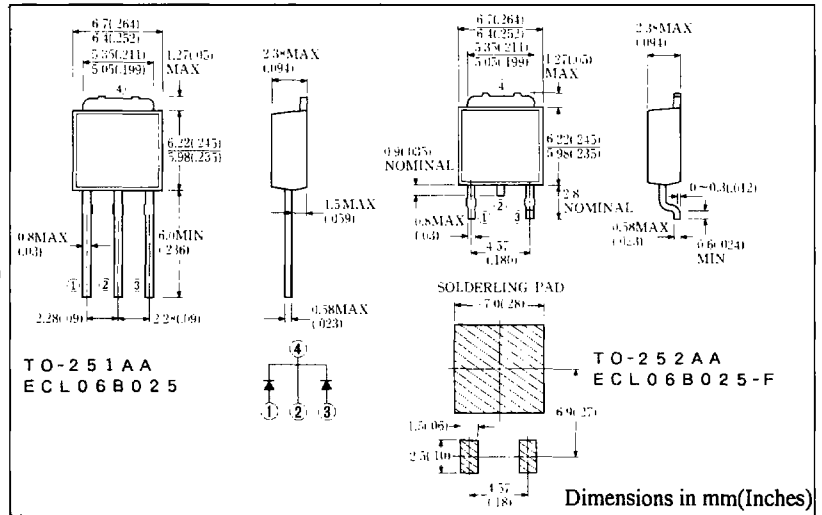

Approx. Net Weight : 0.35 Grams

0.3Grams

MAXIMUM RATINGS

Voltage Rating	TYPE Symbol	◆ ECL06B025 ◆ ECL06B025 - F		Unit
		Value	Value	
Repetitive Peak Reverse Voltage	V_{RRM}	25		V
Repetitive Peak Surge Reverse Voltage (Pulse width $\leq 1 \mu$ sec) (Duty $\leq 1/50$)	V_{RSM}	30		V
Electrical Rating	Symbol	Condition	Rating	Unit
Average Rectified Output Current (resistive load)	I_o	Full rectangular wave conduction $T_c = 67^\circ C$	6.6	A
		Full sinusoidal wave conduction $T_c = 72^\circ C$	6.0	
RMS Forward Current	I_F (RMS)		6.66	A
Peak One-cycle Forward Surge Current	I_{FSM}	50Hz full sine wave, non - repetitive	45	A
Operating Junction Temperature Range	T_{jw}		- 40 to 100	$^\circ C$
Storage Temperature Range	T_{stg}		- 40 to 125	$^\circ C$

ELECTRICAL & THERMAL CHARACTERISTICS

Characteristics	Symbol	Test Condition	Typ.	Max.	Unit
Peak Forward Voltage	V_{FM}	$I_{FM}=3A, T_j=25^\circ C$ per diode leg	-	0.47	V
		$I_{FM}=1A, T_j=25^\circ C$ per diode leg	0.29	-	
Peak Reverse Current	I_{RM}	$V_{RM} = V_{RRM}, T_j=25^\circ C$ per diode leg	-	3	mA
Thermal Resistance	$R_{th(j-c)}$	Junction to Case	-	5	$^\circ C/W$

◆ For spare parts only

FIG 1-FORWARD VOLTAGE VS. FORWARD CURRENT

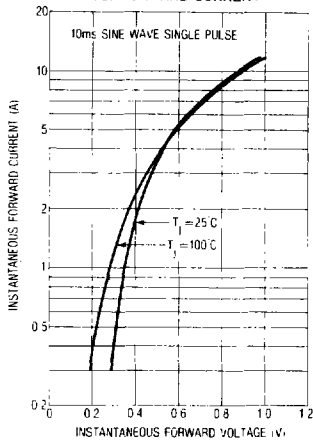


FIG 2-AVERAGE FORWARD POWER DISSIPATION

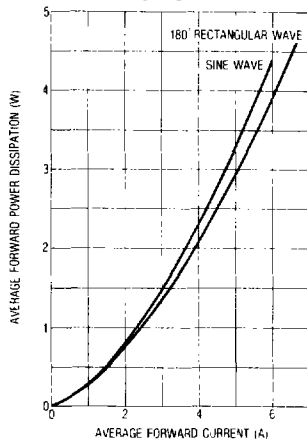


FIG 3-PEAK REVERSE CURRENT VS. PEAK REVERSE VOLTAGE

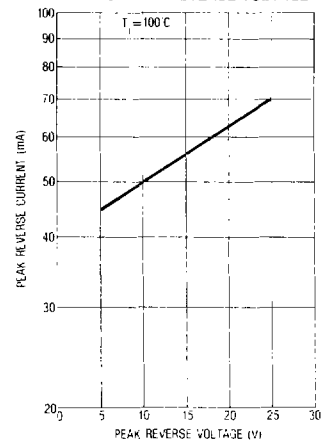


FIG 4-AVERAGE REVERSE POWER DISSIPATION

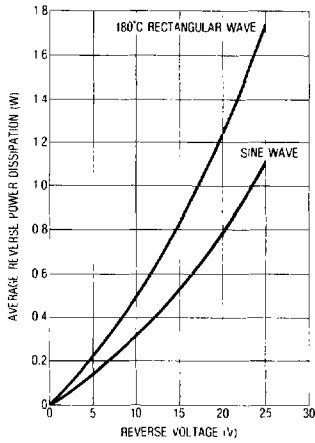


FIG 5-AVERAGE FORWARD CURRENT VS. CASE TEMPERATURE

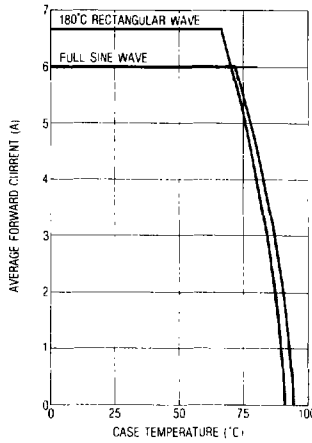


FIG 6-SURGE CURRENT RATINGS

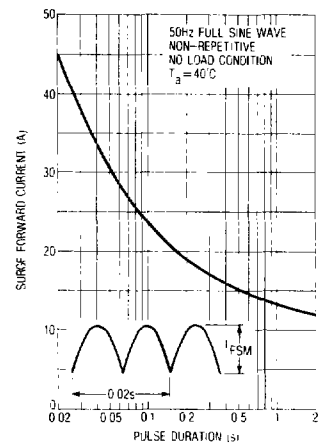


FIG 7-JUNCTION CAPACITANCE VS. REVERSE VOLTAGE

