



2.5V MICROPOWER SHUNT VOLTAGE REFERENCE

- **2.5V OUTPUT VOLTAGE**
- **ULTRA LOW CURRENT CONSUMPTION:**
40 μ A TYP.
- **HIGH PRECISION @ 25°C**
 $\pm 2\%$ and $\pm 1\%$
- **HIGH STABILITY WHEN USED WITH CAPACITIVE LOAD**
- **INDUSTRIAL TEMPERATURE RANGE:**
-40 to +85°C
- **150ppm/°C MAXIMUM TEMPERATURE COEFFICIENT**

DESCRIPTION

The TS4040 is a low power shunt voltage reference providing a stable 2.5V output voltage over the industrial temperature range (-40 to +85°C). Available in SOT23-3 surface mount package, it can be designed in applications where space saving is a critical issue.

The low operating current is a key advantage for power restricted designs. In addition, the TS4040 is very stable and can be used in a broad range of application conditions.

APPLICATION


- Computers
- Instrumentation
- Battery chargers
- Switch Mode Power Supply
- Battery operated equipments

ORDER CODE


Precision	TO92	SOT23-3	SOT23 Marking
2%	TS4040EIZ-2.5	TS4040EILT-2.5	L243
1%	TS4040DIZ-2.5	TS4040DILT-2.5	L242

Single temperature range: -40 to +85°C

Z = TO92 Plastic package
LT = Tiny Package (SOT23-5) - only available in Tape & Reel (LT)

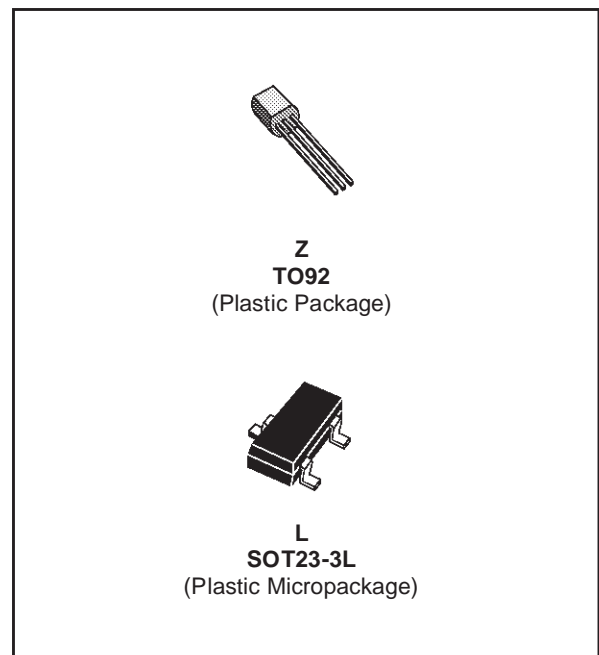

PIN CONNECTIONS (top view)

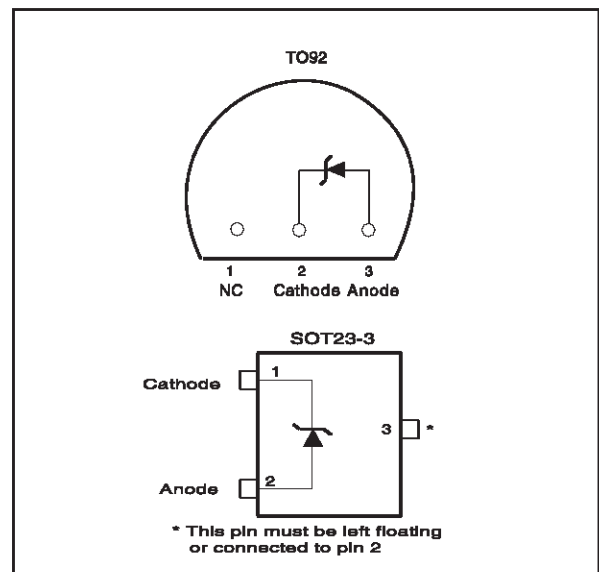

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
I_k	Reverse Breakdown Current	20	mA
I_f	Forward Current	10	mA
P_d	Power Dissipation ¹⁾ SOT23-3 TO92	360 625	mW
T_{oper}	Operating Free Air Temperature Range	-40 to +85	°C
T_{std}	Storage Temperature	-65 to +150	°C
ESD	Human Body Model (HBM)	2	kV
	Machine Model (MM)	200	V
Tlead	Lead Temperature (soldering, 10 seconds)	260	°C

1. P_d has been calculated with $T_{amb} = 25^{\circ}\text{C}$, $T_{junction} = 150^{\circ}\text{C}$ and $R_{thja} = 200^{\circ}\text{C/W}$ for the TO92 package
 $R_{thja} = 340^{\circ}\text{C/W}$ for the SOT23-3 package

OPERATING CONDITIONS

Symbol	Parameter	Value	Unit
I_{kmin}	Minimum Operating Current	60	μA
I_{kmax}	Maximum Operating Current	15	mA

TS4040

ELECTRICAL CHARACTERISTICS

TS4040E (2% Precision)

T_{amb} = 25°C (unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
V _k	Reverse Breakdown Voltage	I _k = 100μA	2.45	2.5	2.55	V
	Reverse Breakdown Voltage Tolerance	I _k = 100μA -40°C < T < +85°C	-50 -74		50 74	mV
I _{kmin}	Minimum Operating Current	T = 25°C		40	65	μA
		-40°C < T < +85°C			70	
ΔV _{ref} /ΔT	Average Temperature Coefficient	I _k = 100μA		30	150	ppm/°C
ΔV _k /ΔI _k	Reverse Breakdown Voltage Change with Operating Current Range	I _{kmin} < I _k < 1mA -40°C < T < +85°C		0.4	1 1.2	mV
		1mA < I _k < 15mA -40°C < T < +85°C		2.5	8 10	
R _{ka}	Reverse Static Impedance	I _k = I _{kmin} to 1mA -40°C < T < +85°C		0.4	1 1.2	Ω
		I _k = 1 to 15mA -40°C < T < +85°C		0.2	0.6 0.7	
K _{vh}	Long Term Stability	I _k = 100μA, t = 1000hrs		120		ppm
E _n	Wide Band Noise	I _k = 100μA 10Hz < f < 10kHz		35		μV _{rms}

Note: Limits are 100% production tested at 25°C. Limits over temperature are guaranteed through correlation and by design.

ELECTRICAL CHARACTERISTICS


TS4040D (1% Precision)

T_{amb} = 25°C (unless otherwise specified)


Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Unit
V _k	Reverse Breakdown Voltage	I _k = 100μA	2.475	2.5	2.525	V
	Reverse Breakdown Voltage Tolerance	I _k = 100μA -40°C < T < +85°C	-25 -49		25 49	mV
I _{kmin}	Minimum Operating Current	T = 25°C		40	65	μA
		-40°C < T < +85°C			70	
ΔV _{ref} /ΔT	Average Temperature Coefficient	I _k = 100μA		30	150	ppm/°C
ΔV _k /ΔI _k	Reverse Breakdown Voltage Change with Operating Current Range	I _{kmin} < I _k < 1mA -40°C < T < +85°C		0.4	1 1.2	mV
		1mA < I _k < 15mA -40°C < T < +85°C		2.5	8 10	
R _{ka}	Reverse Static Impedance	I _k = I _{kmin} to 1mA -40°C < T < +85°C		0.4	1 1.2	Ω
		I _k = 1mA to 15mA -40°C < T < +85°C		0.2	0.6 0.7	
K _{vh}	Long Term Stability	I _k = 100μA, t = 1000hrs		120		ppm
E _n	Wide Band Noise	I _k = 100μA 10Hz < f < 10kHz		35		μV _{rms}

Note: Limits are 100% production tested at 25°C. Limits over temperature are guaranteed through correlation and by design.



Reference voltage versus cathode current

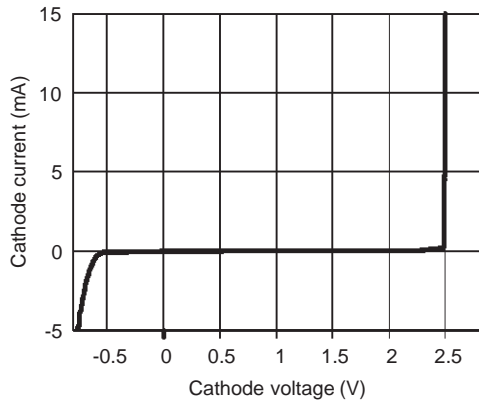


Minimum operating current

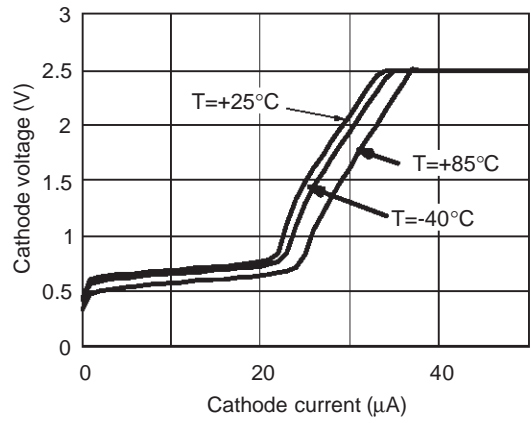


Test circuit





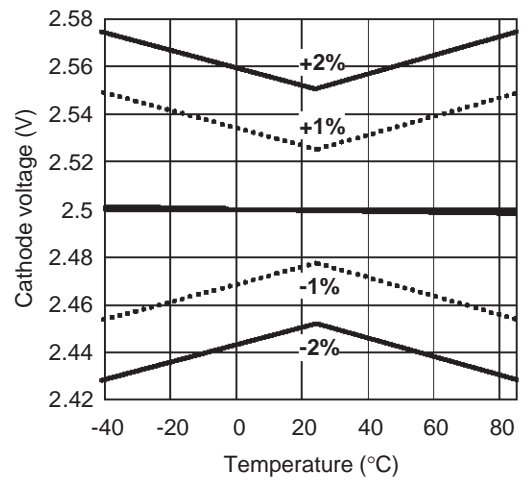
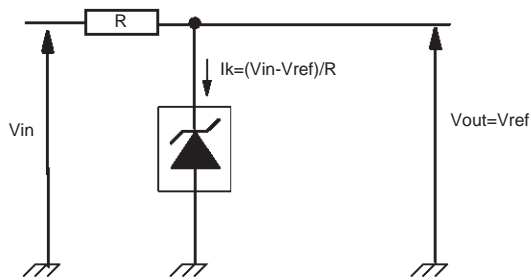




Static impedance (Rka) versus temperature

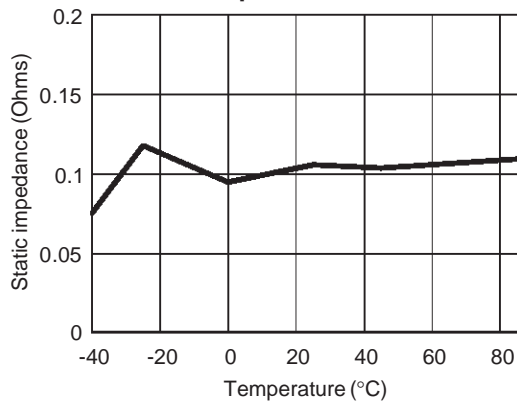

Noise voltage versus Frequency

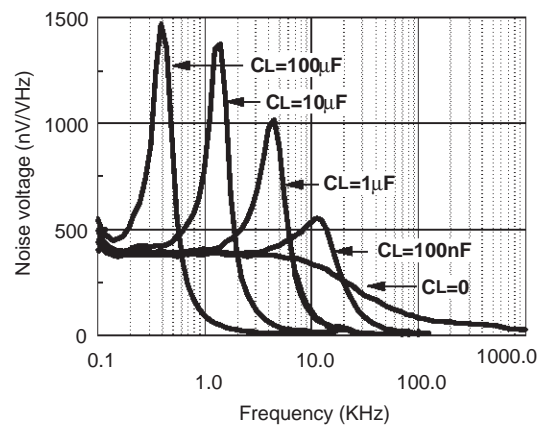


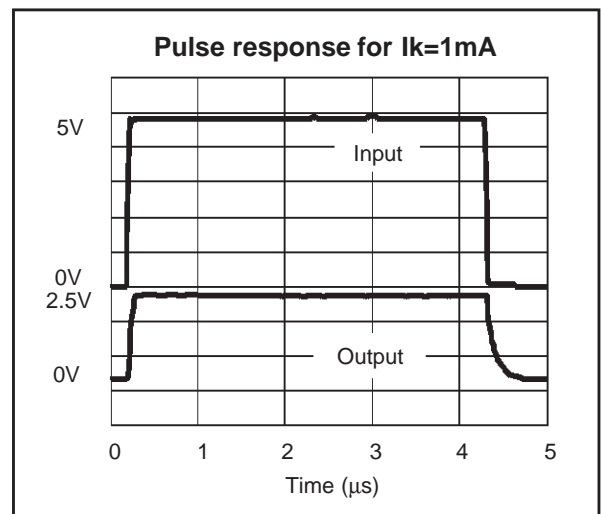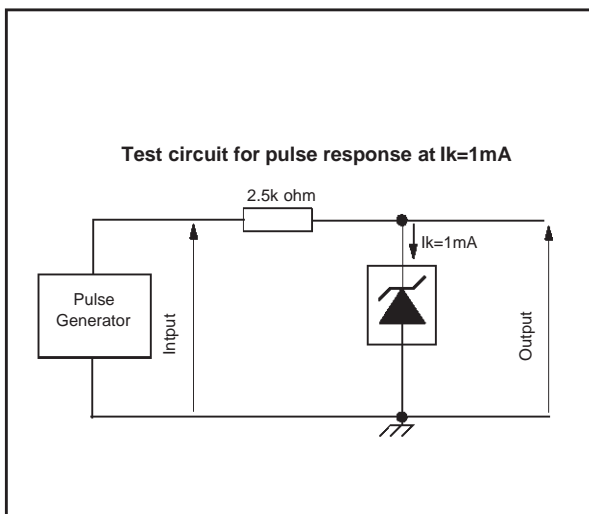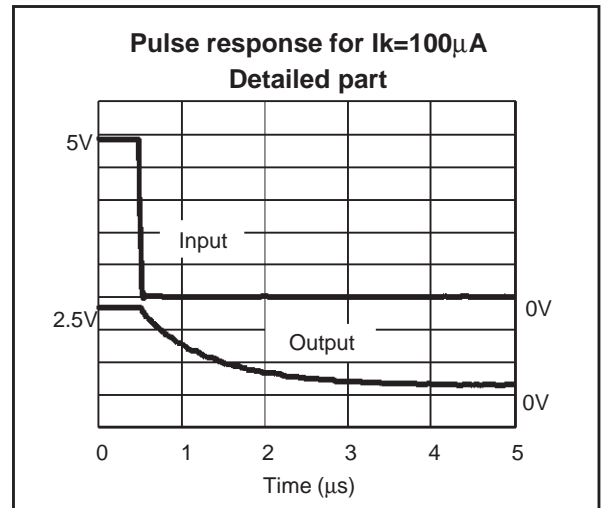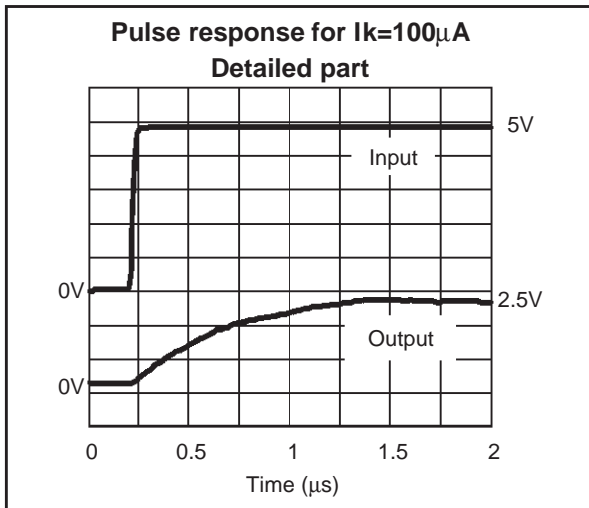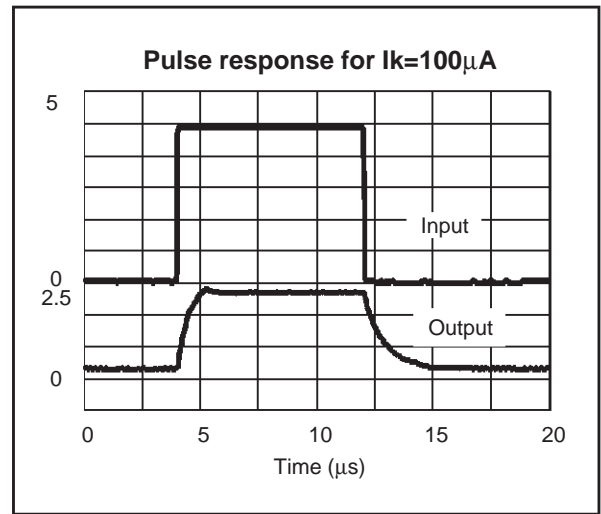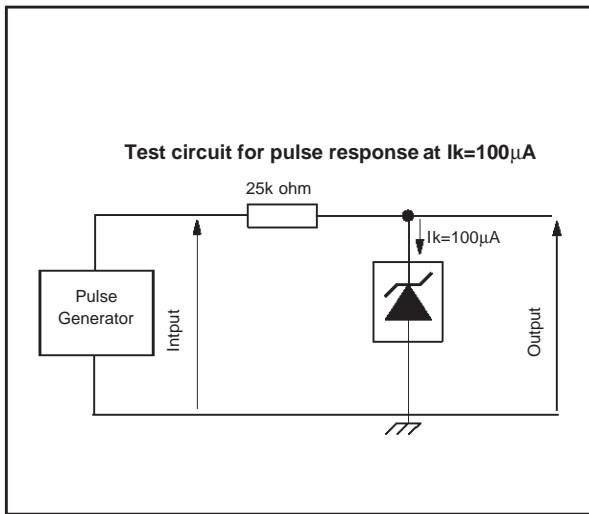

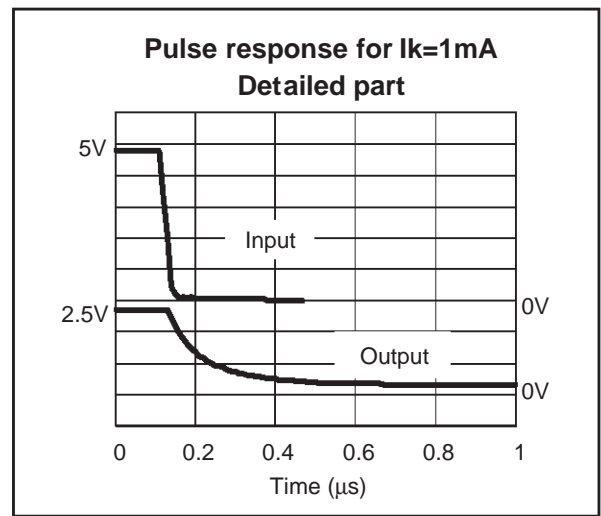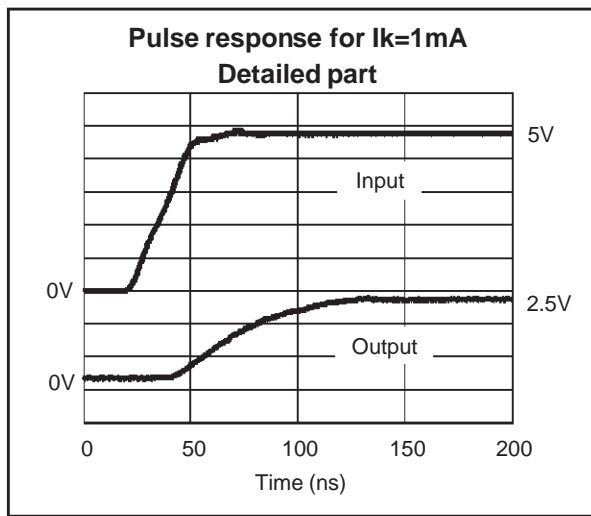

TS4040


PACKAGE MECHANICAL DATA
3 PINS - PLASTIC PACKAGE TO92

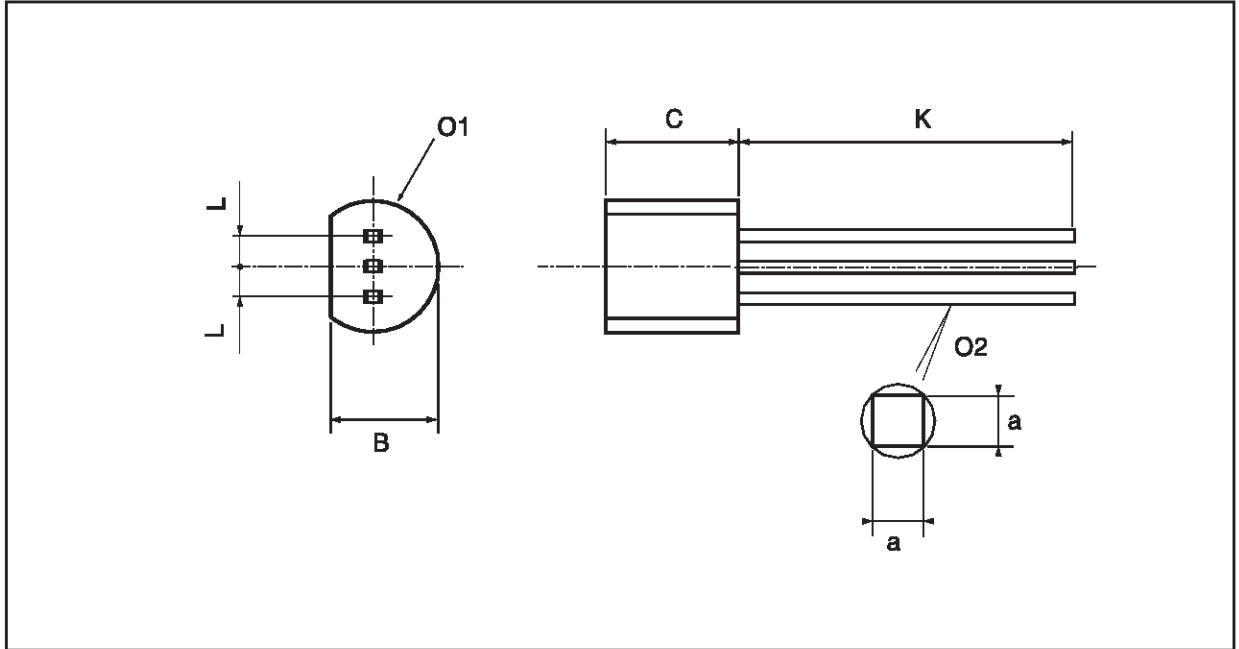

Dim.	Millimeters			Inches		
	Min	Typ.	Max.	Min.	Typ.	Max.
L		1.27			0.05	
B	3.2	3.7	4.2	0.126	0.1457	0.1654
O1	4.45	5.00	5.2	0.1752	0.1969	0.2047
C	4.58	5.03	5.33	0.1803	0.198	0.2098
K	12.7			0.5		
O2	0.407	0.5	0.508	0.016	0.0197	0.02
a	0.35			0.0138		

TS4040

PACKAGE MECHANICAL DATA 3 PINS - TINY PACKAGE (SOT23)

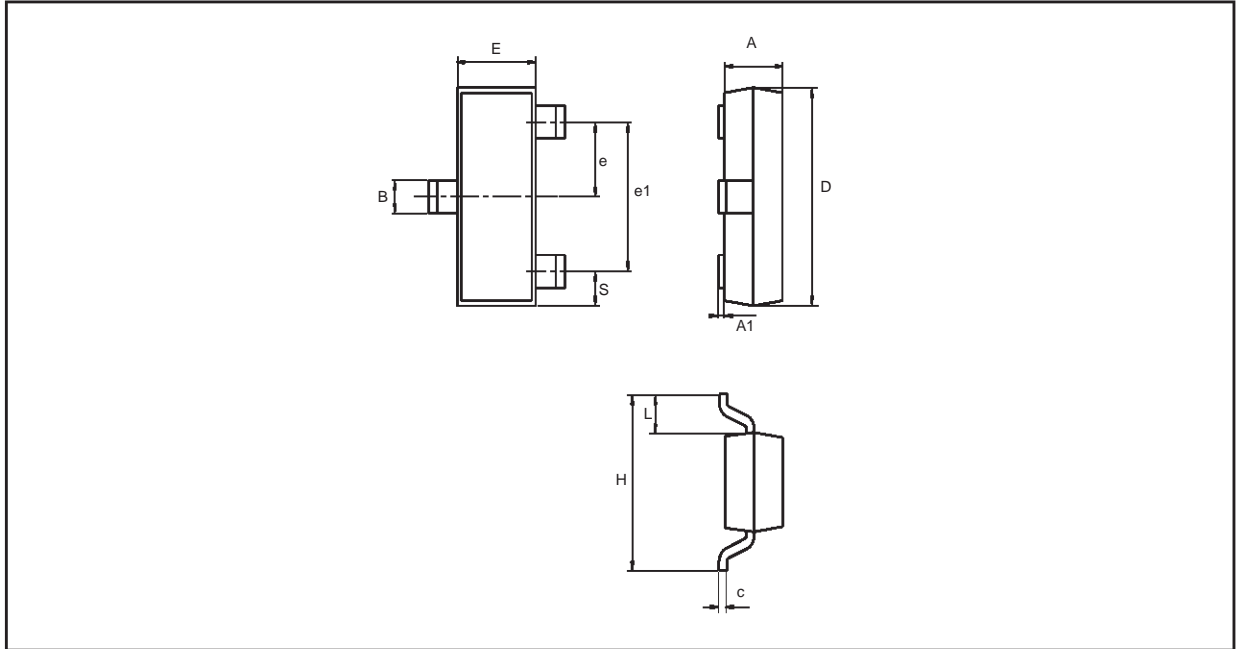

Dim.	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.>
A	0.85		1.1	33.4		43.3
B	0.65		0.95	25.6		37.4
C	1.20		1.4	47.2		55.1
D	2.80		3	110.2		118
E	0.95		1.05	37.4		41.3
F	1.9		2.05	74.8		80.7
G	2.1		2.5	82.6		98.4
H	0.38		0.48	14.9		18.8
L	0.3		0.6	11.8		23.6
M	0		0.1	0		3.9
N	0.3		0.65	11.8		25.6
O	0.09		0.17	2.5		6.7

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

© The ST logo is a registered trademark of STMicroelectronics

© 2000 STMicroelectronics - Printed in Italy - All Rights Reserved
STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia - Malta - Morocco
Singapore - Spain - Sweden - Switzerland - United Kingdom

© <http://www.st.com>