

(2,54mm) .100"

SSW, SSQ SERIES

# THROUGH-HOLE .025" SQ POST SOCKET

## SPECIFICATIONS

For complete specifications see [www.samtec.com?SSW](http://www.samtec.com?SSW) or [www.samtec.com?SSQ](http://www.samtec.com?SSQ)

**Insulator Material:**

Black Liquid Crystal Polymer (-S & -D) or Black High Temperature Thermoplastic (-T)



**Contact Material:**

Phosphor Bronze

**Plating:**

Au or Sn over 50µ" (1.27µm) Ni

**Operating Temp Range:**

-55°C to +125°C with Gold

-55°C to +105°C with Tin

**Contact Resistance:**

10 mΩ max

**Insertion Depth:**

(3,68mm) .145" to (6,35mm) .250"

**Insertion Force:**

(Single contact only)

(-S plating)

Standard= 6oz (1,67N) avg (0,64mm) .025" SQ pin);

SSW Low Insertion Force=

3oz (0,83N) avg

SSQ Low Insertion Force=

3.3oz (0,92N) avg

**Normal Force:**

Standard= 125grams (4.4N)

**Withdrawal Force:**

(Single contact only)

(-S plating)

Standard= 5oz (1,39N) avg (0,64mm) .025" SQ pin);

SSW Low Insertion Force=

2.6oz (0,72N) avg

SSQ Low Insertion Force=

2.9oz (0,81N) avg

**Max Cycles:**

100 with 10µ" (0,25µm) Au

**Voltage Rating:**

550 VAC mated with TSW

**RoHS Compliant:**

Yes: Single & Double Row

No: Triple Row

**Mates With:**  
TSW, MTSW, MTLW,  
LCW, EW, ZW, TSS,  
ZSS, TSM, TSSH



TYPE STRIP



PIN CENTERS

NO. PINS PER ROW

SSW = Solder Tail

SSQ = Square Tail

-1 = (2,54mm) .100" Centers

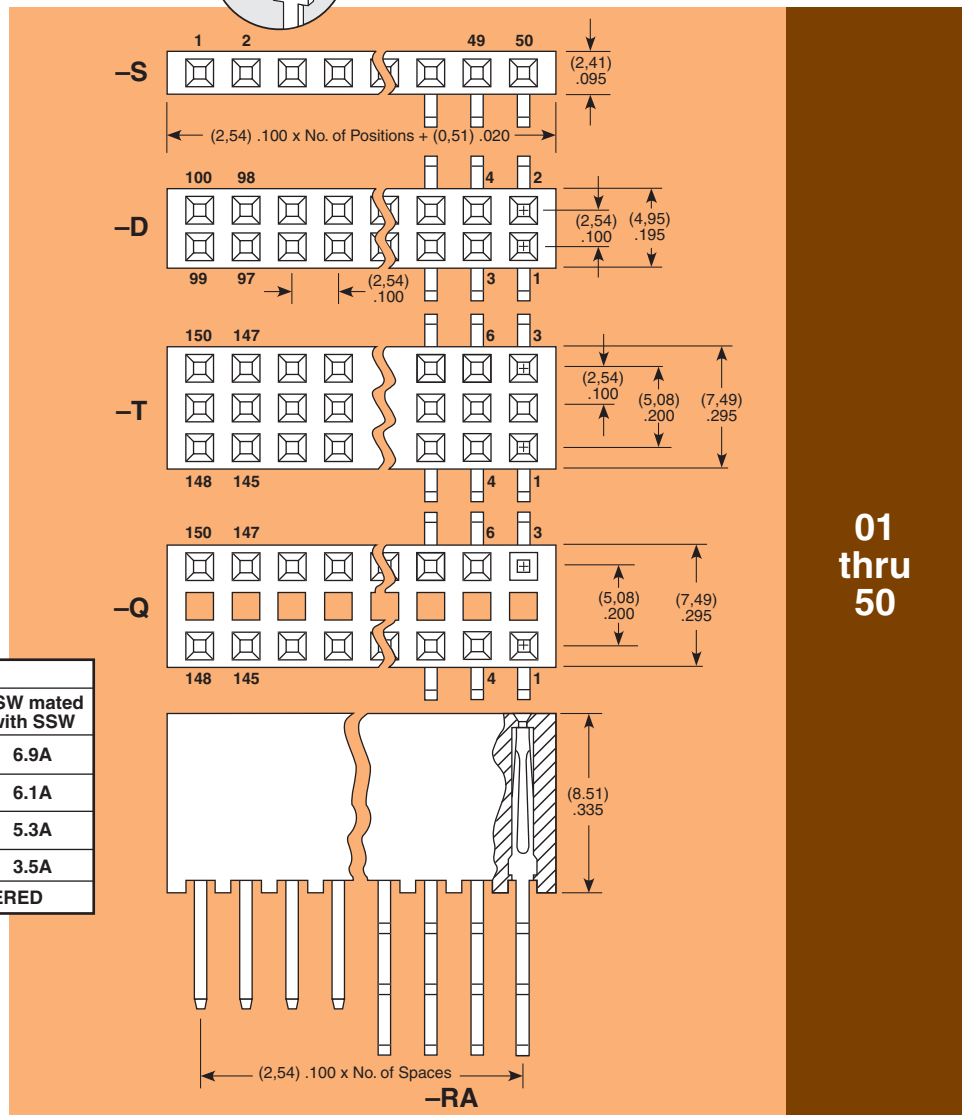

01 thru 50

CURRENT RATING		
AMBIENT TEMP	TSW mated with SSQ	TSW mated with SSW
20°C	7.6A	6.9A
40°C	6.9A	6.1A
60°C	5.9A	5.3A
95°C	3.9A	3.5A
6 POSITIONS (2x3) POWERED		

**Processing:**

Lead-Free Solderable:

Yes: Single & Double Row


No: Triple Row

**Note:**

Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

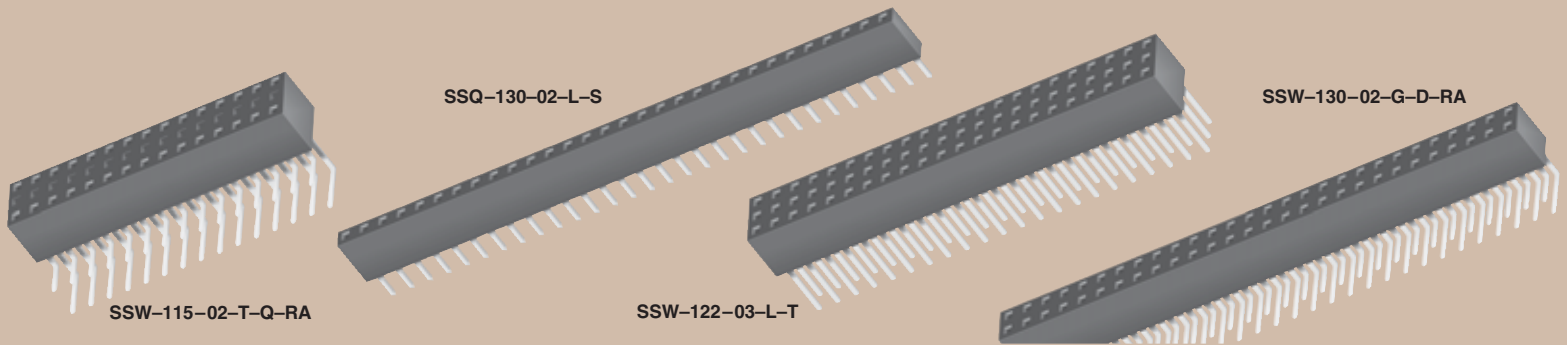

### LEAD STYLE

### PLATING OPTION

### ROW OPTION

### TAIL OPTION

### OTHER OPTION

**-F**

= Gold flash on contact,  
Matte Tin on tail

**-L**

= 10µ" (0,25µm) Gold on contact,  
Matte Tin on tail

**-G**

= 20µ" (0,51µm) Gold on contact,  
Gold flash on tail

**-T**

= Matte Tin  
(-T N/A on LIF contacts)

**-S**

= Single Row

**-P**

= Single Row  
(Notched to mate with LCW)  
36 pins max

**-D**

= Double Row

**-T**

= Triple Row

**-Q**


= Double Row  
.200" (5,08mm) row space  
(Outer rows filled only)

**-RA**

= Right Angle  
(Leave blank for straight pin version)

**-LL**

= Locking Lead



**-“XXX”**

= Polarized  
(Specify “XXX” as position number)


Note: Other Gold plating options available.  
Contact Samtec.

## Straight Pin Versions (Specify “LEAD STYLE” from chart)

LEAD STYLE		SINGLE DOUBLE OR TRIPLE A
Standard Insertion Force	Low Insertion Force*	
-01	-21	(2,64) .104
-02	-22	(4,93) .194
-03	-23	(10,00) .394
-04	-24	(14,83) .584
-06**	N/A	(3,00) .118

\* LIF N/A with Tin Plating


\*\*Style -06 N/A with SSQ

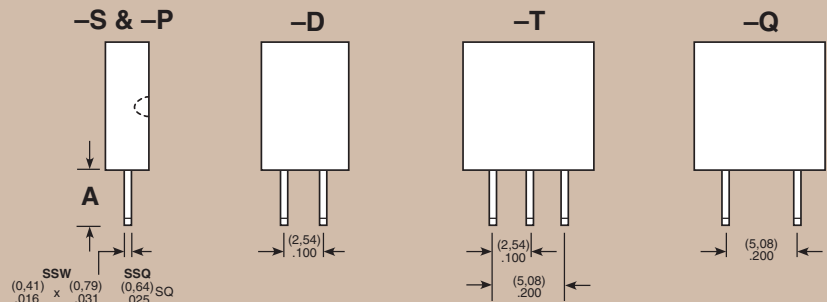

## Right Angle Versions (Specify “LEAD STYLE” from chart)

LEAD STYLE		SINGLE	DOUBLE	TRIPLE
Standard Insertion Force	Low Insertion Force*	(-S & -P) A	(-D) A	(-T & -Q) A
-02	-22	(2,54) .100	(2,54) .100	(2,54) .100
-03	-23	(7,62) .300	(7,62) .300	N/A
-04	-24	(12,45) .490	N/A	N/A

\*LIF N/A with Tin Plating

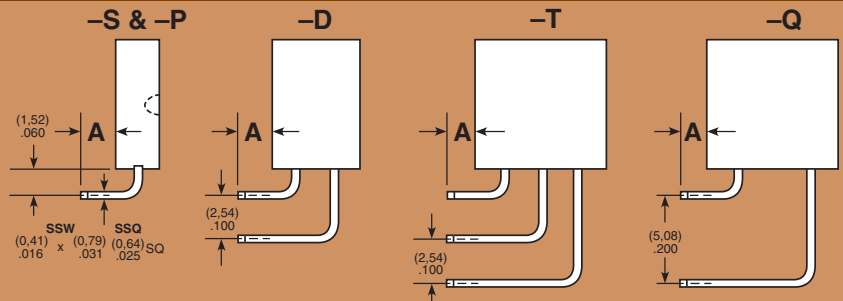

Due to technical progress, all designs, specifications and components are subject to change without notice.

[WWW.SAMTEC.COM](http://WWW.SAMTEC.COM)

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC SILICON VALLEY • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329 SAMTEC UK • Tel: 44 01236 739292  
 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0 SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292  
 SAMTEC ISRAEL • Tel: 972-3-7526800 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-61103766  
 SAMTEC TAIWAN • Tel: 886-2-2735-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC SOUTH AFRICA • Tel: 27 11 452 8112 SAMTEC ANZ • Tel: 613 9512 7747