


REV. W

UNLESS OTHERWISE NOTED TOLERANCES ARE:
 DIMENSIONS ARE IN INCHES
 ONE PLACE DECIMALS ± .1 [3] THREE PLACE DECIMALS ± .005 [.13]
 TWO PLACE DECIMALS ± .01 [.3] FOUR PLACE DECIMALS ± .0020 [.051]
 ANGLES ± 2°
 TITLE: LOW PROFILE SOCKET STRIP
 DWG NO: SLW-1XX-01-X-X
 SHEET 1 OF 1

CRITICAL DIMENSION INSPECTION TABLE	
ASSEMBLY OPERATION	IN-PROCESS INSPECTION
FILL	C1
ROTARY CUT	C2

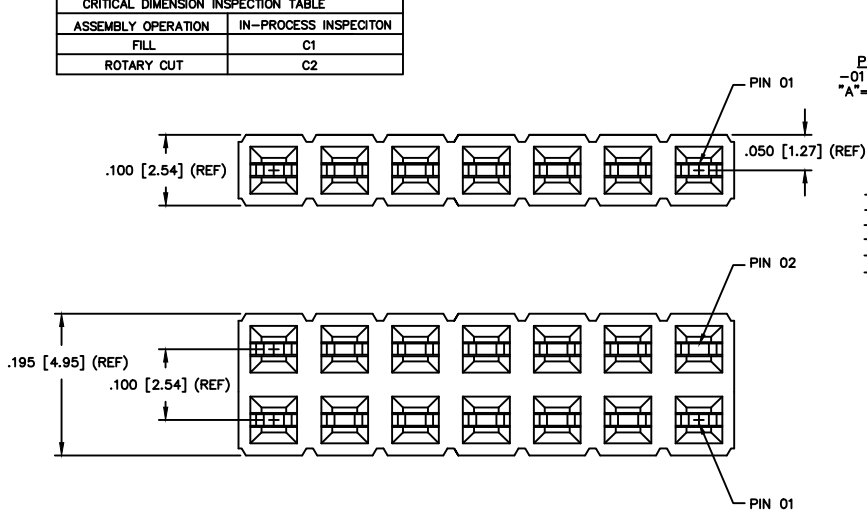

SLW-1XX-01-X-X



POSITION SPECIFICATION
 -01 THRU -50 PER ROW
 "A" = NO. OF POS. x .100 [2.54]

CONTACT STYLE
 -01: USE C-28-X

ROW SPECIFICATION
 -D: DOUBLE (USE SLW-50-D)
 -S: SINGLE (USE SLW-50-S)

PLATING SPECIFICATION
 -G: 10μ" GOLD IN CONTACT AREA, 10μ" GOLD TAIL
 -T: MATTE TIN CONTACT AND TAIL
 -S: 30μ" SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
 -F: 3μ" FLASH SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL
 -H: 30μ" HEAVY GOLD IN CONTACT AREA, 3μ" GOLD TAIL
 -L: 10μ" LIGHT SELECTIVE GOLD IN CONTACT AREA, MATTE TIN ON TAIL

- NOTES:
1. MIN PUSHOUT FORCE: 1 lb.
 2. MAX BOW: .005 in [mm/mm], .025 [.64]
 3. CUT END WALLS TO BE .012 [.30] MIN.
 4. (C) REPRESENTS CRITICAL DIM.
- FOR STATISTICAL PROCESS CONTROL.
5. .010 [.25] MAX CUT FLASH
 6. NO TUBE PACKAGING REQUIRED

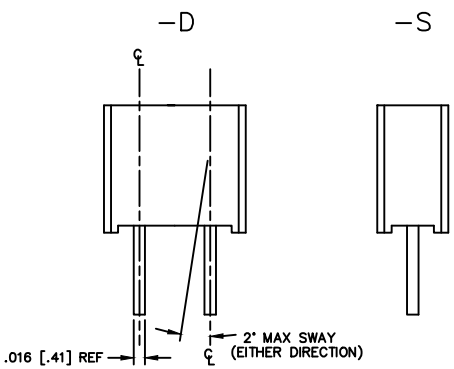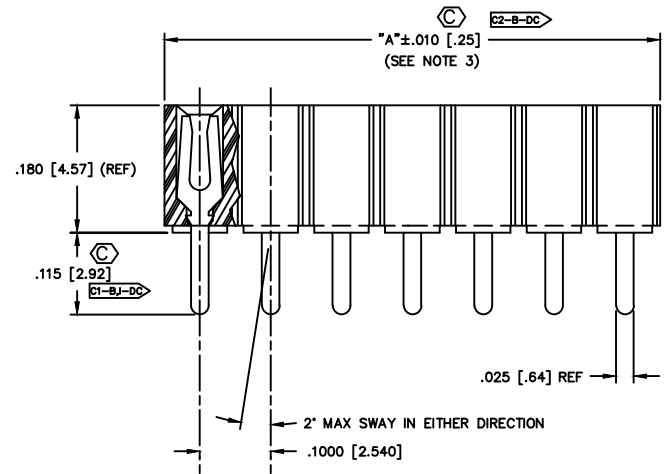

PLOT SCALE: 1=1

Do not scale from this print

PROPRIETARY NOTE
 THIS DOCUMENT CONTAINS INFORMATION CONFIDENTIAL AND PROPRIETARY TO

samtec