
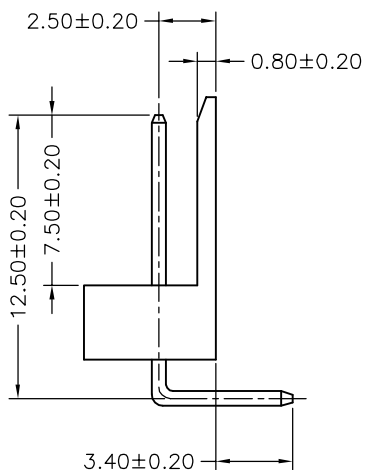
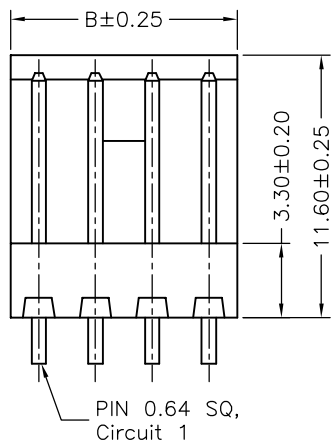



SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 500MΩ Min
 Withstanding Voltage: 800V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A2540WVR-02P	2.50	5.00
A2540WVR-03P	5.00	7.50
A2540WVR-04P	7.50	10.00
A2540WVR-05P	10.00	12.50
A2540WVR-06P	12.50	15.00
A2540WVR-07P	15.00	17.50
A2540WVR-08P	17.50	20.00
A2540WVR-09P	20.00	22.50
A2540WVR-10P	22.50	25.00
A2540WVR-11P	25.00	27.50
A2540WVR-12P	27.50	30.00
A2540WVR-13P	30.00	32.50
A2540WVR-14P	32.50	35.00
A2540WVR-15P	35.00	37.50

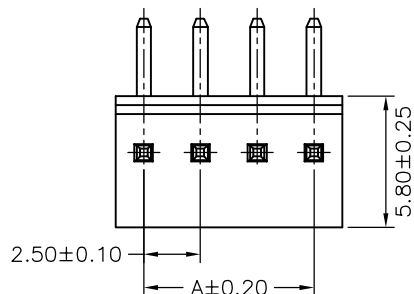

				UNIT		SCALE	SHEET	TITLE:
				mm			1 of 1	
		DRAWN BY		APPROVED BY				DRAW NO. :
		董正一		董正一				
		2002.05.06		2002.05.06				REV. B2
		GENERAL TOLERANCE						
B2	REVISE	2006.09.18						
B1	REVISE	2006.05.15	X. X±0.25	ANGLE±				
B0	NEW RELEASE	2005.12.23	X. XX±0.15					
REV.	DESCRIPTION	DATE	X. XXX±0.05					