


PERFORMANCE CHARACTERISTICS

CURRENT RATING 1.5 A AT 20°C (FULLY LOADED)  
1 A AT 70°C (FULLY LOADED)

RATED VOLTAGE 500V AC (CONT / CONT)  
OPERATING TEMPERATURE -55°C TO 125°C  
CONTACT RESISTANCE 20 mΩ MAX  
INSERTION FORCE 0.75 N MAX /CONT  
EXTRACTION FORCE: 0.15 N MIN /CONT  
INSULATION RESISTANCE 10<sup>4</sup> MΩ MIN

NOTES

- LEAD FREE INDICATOR : LF- LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF. DVG No. BS.C.201844,003)
- THIS PRODUCT IS CSA APPROVED  
THIS PRODUCT IS UL RECOGNISED
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING: BSA,201,572001  
THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVE AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.

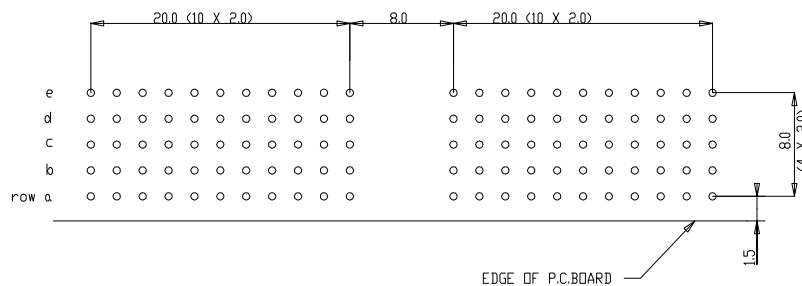

Material		Spec ref		tolerance	projection	size	Scale
Mat code		Heat treat		MM	MM	A1	5.000
Plating/Finish		4 2 92		W.Paris	Product Family	MILLIPACS	ECN
rev		ecn no	dr	date	Appr	Model Name	REL Level
A	1M-0066	MINI	07/08/04				
B	3005-0878	Kasson	02/08/05				
C	3007-0862	Kasson	05/09/07				
Pror/E File		size	MPACS 5+2R RA RCP CONN TYPE A SPECIAL DRAWING FOR S11SUBSHD		2	BS,C,201418,053	Rev. C
catalog no		HMEROIPAS100----		CUSTOMER DRAWING		sheet 1 of 1	

All rights reserved. Reproduction or use in third parties is not permitted without written consent from the proprietor. Property of FCJ. Copyright 2009.