

# 2.54mm (0.1") Pin Header

(Dual Row, Straight And Right Angle)


2202 Series

### APPLICATION AND FEATURES

1. Side and end stackable (on unbroken edges).
2. Notches for easy breakable.
3. Variable pin length, gold or tin plated.
4. Standoffs facilitate post soldering clean.
5. Dual row 04 to 80 contacts.

### SPECIFICATIONS

Current Rating: 3 Amps  
 Insulator resistance: 5000 Megohms Min.  
 Dielectric withstanding: AC 500 V  
 Operating Temperature: -40°C to +105°C  
 Contact Material: Brass or Phosphor bronze  
 Insulator Material: Polyester, UL 94V-0

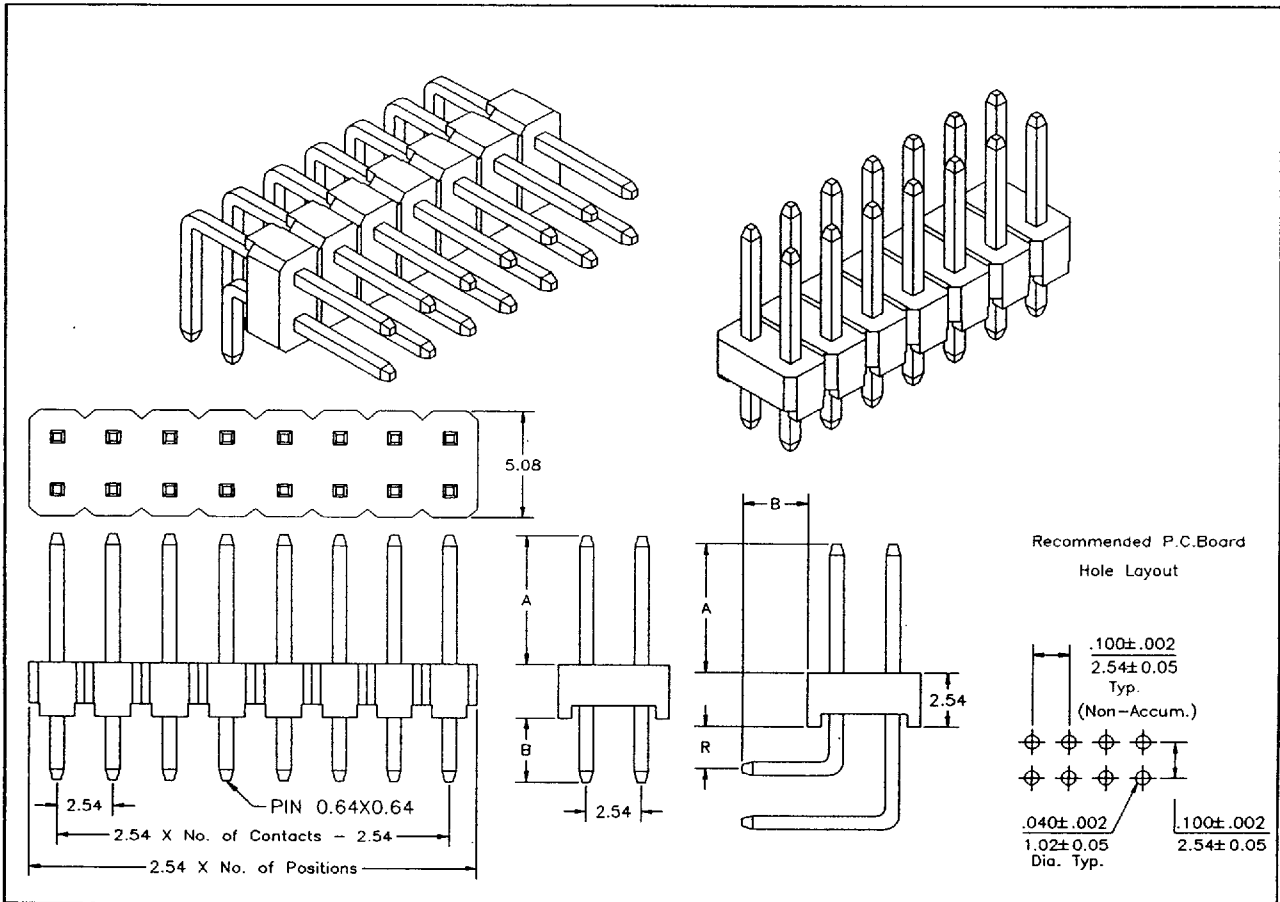

### Order Information 2202 Series

Example: 2202-34-S-02-A/B

Series No.	Number of Contacts	Connector Type	Contact Plating	Pin Length mm
2202	04 to 80 Contacts	Straight <b>S</b>	Tin Plated <b>01</b>	A B
		Right Angle	Gold Plated	<b>6.0</b> <b>3.0</b>
		1.5mm <b>R1</b>	Flash <b>02</b>	
		2.0mm <b>R2</b>	10 μ" <b>10</b>	
			30 μ" <b>30</b>	

SINGATRON ENT. CO., LTD. Tel.: (909) 464-1883 Fax.: (909) 464-1884

9011184 000062 138