
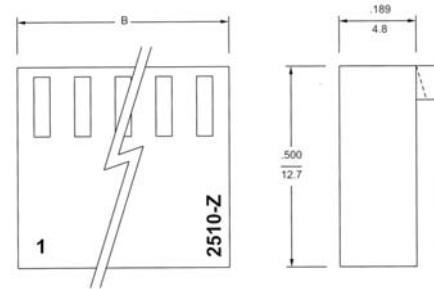


**SPECIFICATIONS**

Material: UL 94V-0 nylon 66  
 Current Rating: 3A AC, DC  
 Voltage Rating: 250V AC, CD  
 Insulation Resistance: 1000MΩ min.  
 Withstanding: 1500V AC/min.  
 Temp Range: -40°C ~ 105°C

- Accepts JS-A-0051-T terminal
- 2 ~ 20 circuits available


Dimensions		
Circuits	Dim. A (mm)	Dim. B (mm)
2	2.54	5.60
3	5.08	8.14
4	7.62	10.68
5	10.16	13.22
6	12.70	15.76
7	15.24	18.30
8	17.78	20.84
9	20.32	23.38
10	22.86	25.92
11	25.40	28.46
12	27.94	31.00
13	30.48	33.54
14	33.02	36.08
15	35.56	38.62
16	38.10	41.16
17	40.64	43.70
18	43.18	46.24
19	45.72	48.78
20	48.26	51.32

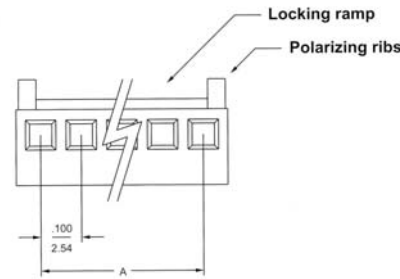

(With Polarizing ribs and Locking ramp)

(With Locking Ramp)

(Without Polarizing Ribs & Locking Ramp)



Series	Type	Positions	Color	Options
JS-A	2510Z	XX	X	XX
Friction Lock Housing	Type 2510Z	XX=02-20	W=White B=Brown	Blank=With Rib & Ramp NP=No Polarization NL=No Locking Ramp

RoHS compliant

Rev.	Description	Date	Approved	Drawing	Name	Date
				Approved	Howard	11/05/97
				Checked	Lizzy	11/05/97
				Drawn	Tina	11/05/97
				0.0 ± 0.35	0.00 ± 0.20	Angles ± 3°
				UNIT: mm		

**Central Components Manufacturing**  
 440 Lincoln Blvd., Middlesex, New Jersey 08846  
 Phone 732 469-5720 888 288-5152 Fax 732 469-1919

Part No.: **JS-A-2510Z-XX-X-XX**

Description: .100" (2.54mm) Polarizing Housing

