



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

BZX85C Series

Features

- Low noise
- Very high stability
- Low reverse current
- Very sharp reverse characteristic

Maximum Ratings

- Operating Temperature: -65°C to $+175^{\circ}\text{C}$
- Storage Temperature: -65°C to $+175^{\circ}\text{C}$
- DC Power Dissipation: 1.3 Watt @ $L=4\text{mm}$ $T_L \leq 25^{\circ}\text{C}$
- Forward Voltage @ 200mA: 1.0 Volts
- Thermal Resistance: 110K/W Junction to Ambient

1.3 Watt Zener Diode 2.7 to 75 Volts

Figure1. Power Dissipation vs. Ambient Temperature



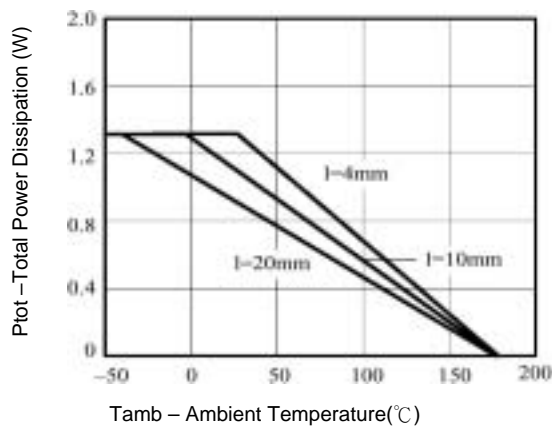


Figure2. Thermal Resistance vs. Lead Length

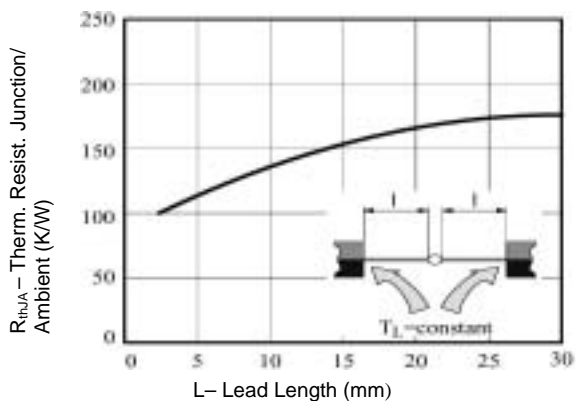

DO-41G

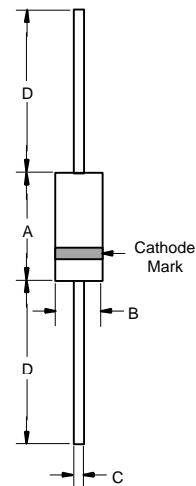

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.166	.205	4.10	5.20	
B	.080	.107	2.00	2.70	
C	.028	.034	.70	.90	
D	1.000	---	25.40	---	

BZX85C Series

Type	V _{Znom}	I _{ZT}	for V _{ZT} and	r _{zjT}	r _{zjk} at	I _{ZK}	I _R at	V _R	TK _{VZ}
BZX85C	V	mA	V ¹⁾	Ω	Ω	mA	μ A	V	%/K
2V7	2.7	80	2.5~2.9	<20	<400	1	<150	1	-0.09~-0.06
3V0	3.0	80	2.8~3.2	<20	<400	1	<100	1	-0.08~-0.05
3V3	3.3	80	3.1~3.5	<20	<400	1	<40	1	-0.08~-0.05
3V6	3.6	60	3.4~3.8	<20	<500	1	<20	1	-0.08~-0.05
3V9	3.9	60	3.7~4.1	<15	<500	1	<10	1	-0.08~-0.05
4V3	4.3	50	4.0~4.6	<13	<500	1	<3	1	-0.06~-0.03
4V7	4.7	45	4.4~5.0	<13	<500	1	<3	1	-0.05~-+0.02
5V1	5.1	45	4.8~5.4	<10	<500	1	<1	1	-0.02~-+0.02
5V6	5.6	45	5.2~6.0	<7	<400	1	<1	1	-0.05~-+0.05
6V2	6.2	35	5.8~6.6	<4	<300	1	<1	2	0.03~0.06
6V8	6.8	35	6.4~7.2	<3.5	<300	1	<1	3	0.03~0.07
7V5	7.5	35	7.0~7.9	<3	<200	0.5	<1	5	0.03~0.07
8V2	8.2	25	7.7~8.7	<5	<200	0.5	<1	6.2	0.03~0.08
9V1	9.1	25	8.5~9.6	<5	<200	0.5	<1	6.8	0.03~0.09
10	10	25	9.4~10.6	<7	<200	0.5	<0.5	7.5	0.03~0.1
11	11	20	10.4~11.6	<8	<300	0.5	<0.5	8.2	0.03~0.11
12	12	20	11.4~12.7	<9	<350	0.5	<0.5	9.1	0.03~0.11
13	13	20	12.4~14.1	<10	<400	0.5	<0.5	10	0.03~0.11
15	15	15	13.8~15.6	<15	<500	0.5	<0.5	11	0.03~0.11
16	16	15	15.3~17.1	<15	<500	0.5	<0.5	12	0.03~0.11
18	18	15	16.8~19.1	<20	<500	0.5	<0.5	13	0.03~0.11
20	20	10	18.8~21.2	<24	<600	0.5	<0.5	15	0.03~0.11
22	22	10	20.8~23.3	<25	<600	0.5	<0.5	16	0.04~0.12
24	24	10	22.8~25.6	<25	<600	0.5	<0.5	18	0.04~0.12
27	27	8	25.1~28.9	<30	<750	0.25	<0.5	20	0.04~0.12
30	30	8	28~32	<30	<1000	0.25	<0.5	22	0.04~0.12
33	33	8	31~35	<35	<1000	0.25	<0.5	24	0.04~0.12
36	36	8	34~38	<40	<1000	0.25	<0.5	27	0.04~0.12
39	39	6	37~41	<50	<1000	0.25	<0.5	30	0.04~0.12
43	43	6	40~46	<50	<1000	0.25	<0.5	33	0.04~0.12
47	47	4	44~50	<90	<1500	0.25	<0.5	36	0.04~0.12
51	51	4	48~54	<115	<1500	0.25	<0.5	39	0.04~0.12
56	56	4	52~60	<120	<2000	0.25	<0.5	43	0.04~0.12
62	62	4	58~66	<125	<2000	0.25	<0.5	47	0.04~0.12
68	68	4	64~72	<130	<2000	0.25	<0.5	51	0.04~0.12
75	75	4	70~79	<135	<2000	0.25	<0.5	56	0.04~0.12

¹⁾ Tighter tolerances available request:
BZX85B... ±2% of V_{Znom}



TM

Micro Commercial Components

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.