

**PRELIMINARY**

spec ref		dr	Jes Wu	2015/01/19	projection	MM	size	A3	scale	4:1
tolerance std		eng	Jes Wu	2015/03/25			ecn no		rel level	
ISO 406 ISO 1101		chr	-	-			-		Preliminary	
TOLERANCES UNLESS OTHERWISE SPECIFIED		appr	-	-	product family		-		-	
surface		linear	0.X	±0.50		title		Minitek Pwr Hybrid 3.0mm REC HSG	dwg no 10129812	rev 1
		linear	0.XX	±0.25		cat. no.				
ISO 1302		angular	0°	±3°	www.fci.com		-		sheet 1 of 2	




A


B

C


D




2POSOP(2P)




4POS4P(8P)

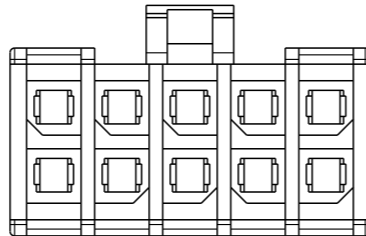


4POS6P(10P)

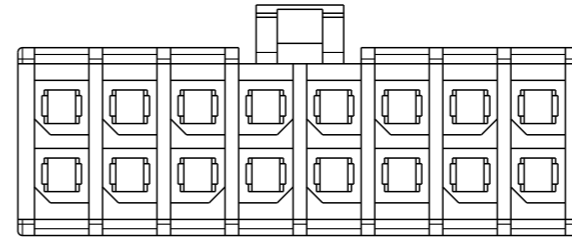


8POS8P(16P)




2POS2P(4P)



2POS4P(6P)

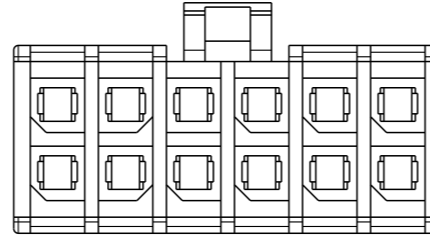


6POS6P(12P)

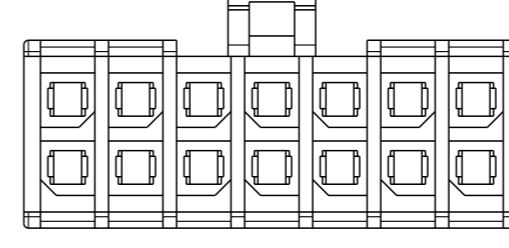

6POS8P(14P)

POWER PIN LAYOUT ( WITH OR WITHOUT SIGNAL PINS)

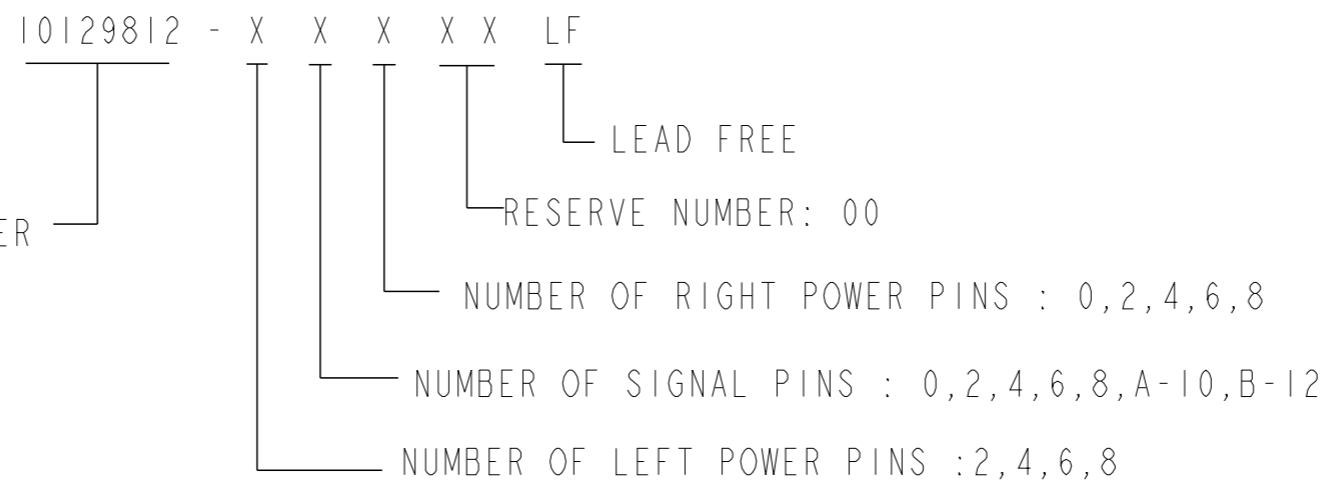

NOTES:

- MATERIALS:  
NYLON 6/6 , UL94V-0, COLOR:BLACK
- PRODUCT SPECIFICATION: GS-12-1437.
- APPLICATION SPECIFICATION: GS-20-0437.
- PACKAGING SPECIFICATION: GS-14-2450.

CONFIGURATION	Dim"A"
2P2S2P	9.80
2P4S2P	11.80
2P6S2P	13.80
2P8S2P	15.80
2P10S2P	17.80
2P12S2P	19.80
4P2S4P	15.80
4P4S4P	17.80
4P6S4P	19.80
4P8S4P	21.80
4P10S4P	23.80
4P12S4P	25.80
6P2S6P	21.80
6P4S6P	23.80
6P6S6P	25.80
6P8S6P	27.80
6P10S6P	29.80
6P12S6P	31.80
8P2S8P	27.80
8P4S8P	29.80
8P6S8P	31.80
8P8S8P	33.80
8P10S8P	35.80
8P12S8P	37.80
2POS0P(2P)	3.86
2POS2P(4P)	6.86
2POS4P(6P)	9.86
4POS4P(8P)	12.86
4POS6P(10P)	15.86
6POS6P(12P)	18.86
6POS8P(14P)	21.86
8POS8P(16P)	24.86

spec ref	dr	Jes Wu	2015/01/19	projection	MM	size	A3	scale	4:1
tolerance std	eng	Jes Wu	2015/03/25			ecn no	-	rel level	Preliminary
ISO 406	chr	-	-						
ISO 1101	appr	-	-						
surface	linear	0.X	±0.50		Minitek Pwr Hybrid 3.0mm REC HSG	dwg no	10129812	rev	1
ISO 1302		0.XX	±0.25						
	angular	0°	±3°						
www.fci.com				cat. no.	-	Product - Customer Drw			sheet 2 of 2