
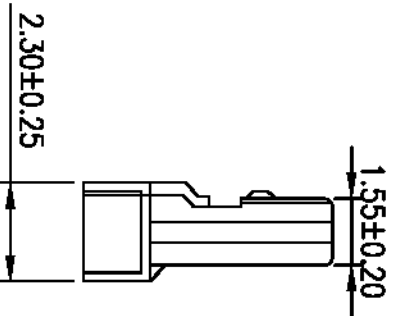
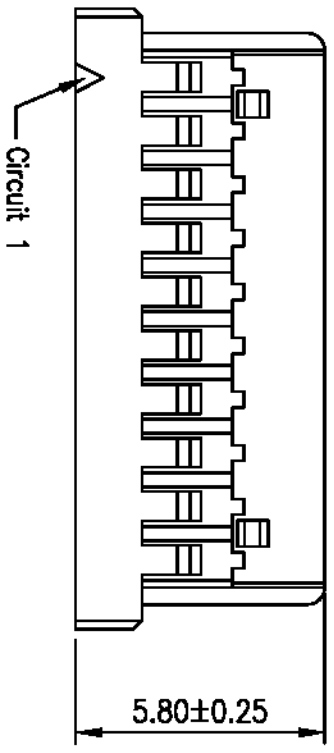


RoHS compliant

1.25mm (.049") Pitch Housing

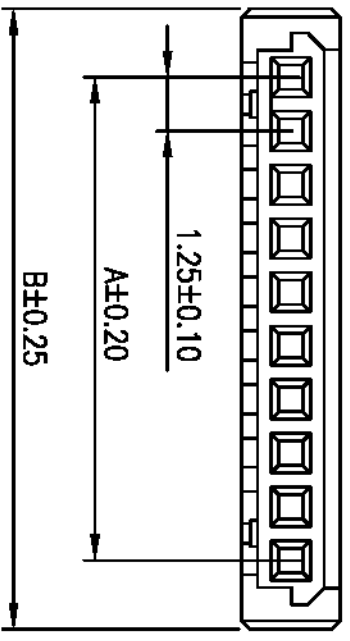

Features:

- * Available in 2 through 30 Circuits
- * Material: Nylon66 UL94V-0
- * Accepts YR-0950-T Crimp Terminal
- * Mates with YR-0950-SXXS or YR-0950-SXXR Series Wafers



Specifications:

- * Pitch between Poles 1.25mm
- * Rated Voltage 100V AC,DC
- * Rated Current 1A
- * Withstand Voltage 500V AC/minute
- * Insulation Resistance 500M Ohms/Min
- * Temperature Range -25°C~+85°C

Circuits	Part No	Dimension mm	
		A	B
2	YR-0950-H02	1.25	4.45
3	YR-0950-H03	2.50	5.70
4	YR-0950-H04	3.75	6.95
5	YR-0950-H05	5.00	8.20
6	YR-0950-H06	6.25	9.45
7	YR-0950-H07	7.50	10.70
8	YR-0950-H08	8.75	11.95
9	YR-0950-H09	10.00	13.20
10	YR-0950-H10	11.25	14.45
15	YR-0950-H15	17.50	20.70
20	YR-0950-H20	23.75	26.95
25	YR-0950-H25	30.00	33.20
30	YR-0950-H30	36.25	39.45

EDITION	DATE	MODIFY	VIEW	DRAW BY		AUDITING	APPROVAL	DATE	DWG NO	TOLERANCE	
A0	2002.05.24	DRAWING		Tianmeng Sun		Jeff	Jessica	2002.05.24	YY-0950-HXX	A1254H 152-A0	.00 .000
				毅耀實業股份有限公司 YOUNG YAK ENTERPRISE CO.,LTD. TEL:886-2-2999-9629 FAX:886-2-2999-0575							

1.25mm (.049") Pitch SMT Wafer

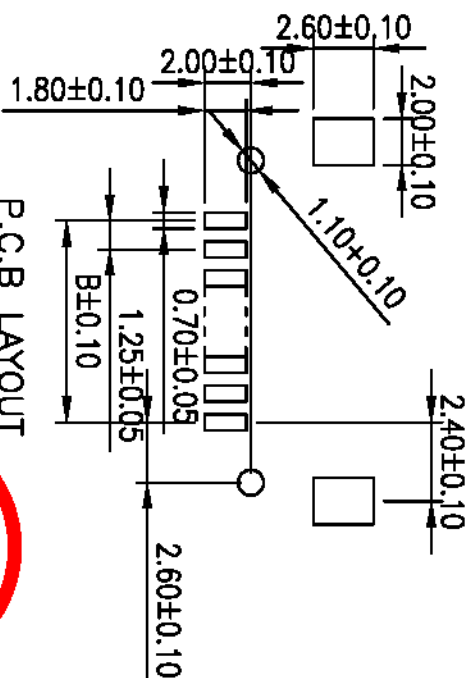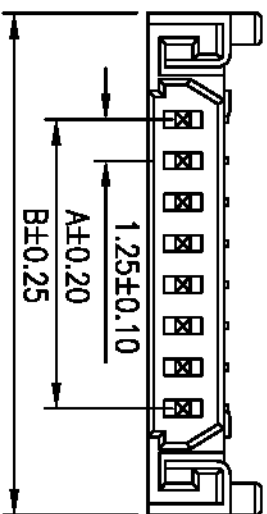



P.C.B. LAYOUT

Features:

- * Available in 2 through 30 Circuits
- * Insulator: Nylon 6T UL94-V0
- * Accepts YY-0950-H Series Housing
- * 0.3mm(.012") Flat Pin
- * Pin Material: Brass/Tin-plated
- * Solder Tabs: Brass/Tin-plated

Specifications

- * Pitch Between Poles 1.25mm
- * Rated Voltage 100V AC,DC
- * Rated Current 1A
- * Withstand Voltage 500V AC/minute
- * Contact Resistance 500M Ohms/Min
- * Temperature Range -25C~+85C

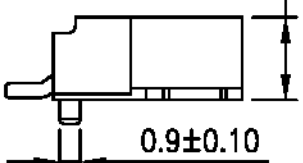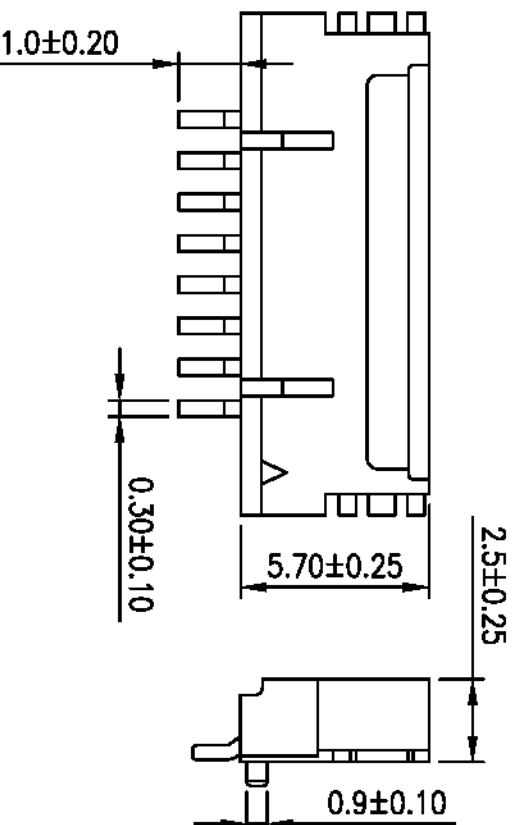

Ordering information:

- YY-0950-SXXRXPX
- S: SMT
- Pin: 02~30
- R: Right angle
- T: Tin
- Packing A: Tape & Reel
- B: Tube Package
- C: Box Package
- P: With Post




Circuits	Part No	Dimension mm	
		A	B
2	YY-0950-S02R	1.25	7.45
3	YY-0950-S03R	2.50	8.70
4	YY-0950-S04R	3.75	9.95
5	YY-0950-S05R	5.00	11.20
6	YY-0950-S06R	6.25	12.45
7	YY-0950-S07R	7.50	13.70
8	YY-0950-S08R	8.75	14.95
9	YY-0950-S09R	10.00	16.20
10	YY-0950-S10R	11.25	17.45
15	YY-0950-S15R	17.50	23.70
20	YY-0950-S20R	23.75	29.95
25	YY-0950-S25R	30.00	36.20
30	YY-0950-S30R	36.24	42.45

EDITION	DATE	MODIFY	VIEW	DRAW BY	AUDITING	APPROVAL	DATE	DWG NO	A1254SRP	TOLERANCE
A0	2003.05.29	DRAWING		Andy He	Jeff	Jessica	2003.05.29	YY-0950-SXXRXPX	152-A0	.00
										.000

YOUNG YAK ENTERPRISE CO., LTD.
 毅耀實業股份有限公司
 TEL: 886-2-2999-9629
 FAX: 886-2-2999-0575

1.25mm (.049") Pitch Crimp Terminal

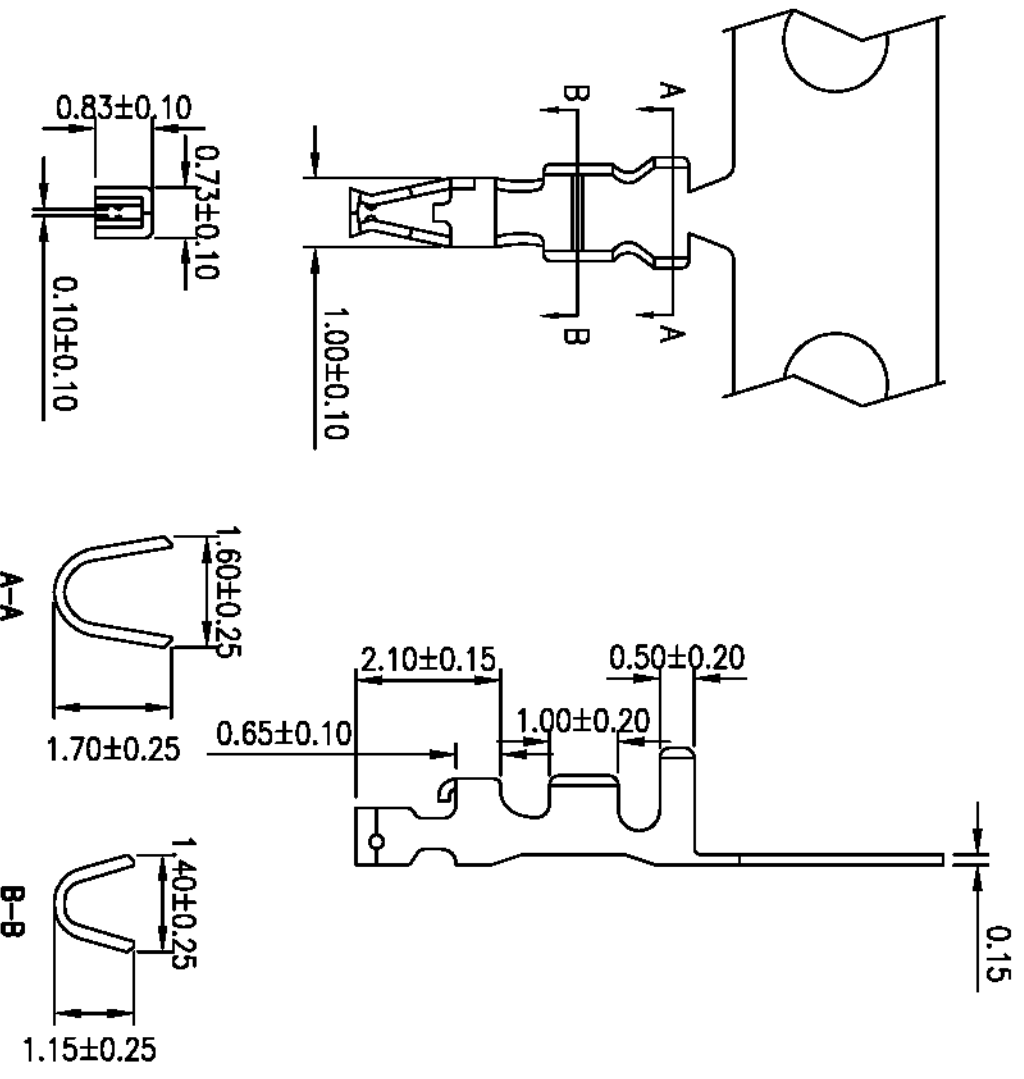

Features:

- * Used in YR-0950-H Series Housing
- * Accepts AWG 28~32 Wire Range
- * Insulation O.D.= 1.00 mm(max)
- * Material : Phosphor Bronze
- * Finish : Tin-Plated
- * Qty/Reel : 10,000 PCS
- * Thickness: 0.15




Specification:

- * Pitch Between Poles 1.25mm
- * Rated Voltage 100V AC,DC
- * Rated Current 1A
- * Withstand Voltage 500V AC/minute
- * Insulation Resistance 500M Ohms/Min
- * Temperature Range -25C~+85C

Ordering Information:

YY-0950-TXXX

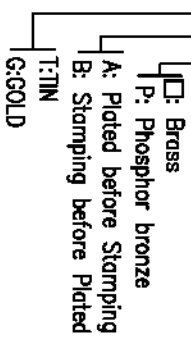

EDITION	DATE	MODIFY	VIEW			毅耀實業股份有限公司 YOUNG YAK ENTERPRISE CO.,LTD. TEL:886-2-2999-9629 FAX:886-2-2999-0575	DRAW BY	AUDITING	APPROVAL	DATE	DWG NO	TOLERANCE
A0	2000.11.01	DRAWING					Z.H.Oyang	Jeff	Jessica	2000.11.01	YY-0950-TXXX	.0