


**ELECTRICAL:**

CURRENT RATING: 3A AC, DC  
 VOLTAGE RATING: 250V AC MAX.  
 OPERATING TEMPERATURE: -40 ° TO +85 °C  
 CONTACT RESISTANCE: 20 MILLIOHM MAX.  
 INSULATION RESISTANCE: 1000 MEGAOHM MIN.  
 VOLTAGE WITHSTANDING: 600V AC / MINUTE

**MATERIAL:**

CONTACT MATERIAL: COPPER ALLOY,  
 TIN OR GOLD PLATING OVER NICKEL  
 PLASTIC HOUSING: HIGH TEMP. THERMOPLASTIC  
 FLAMMABILITY RATING UL 94V-0.

**HOW TO ORDER:**

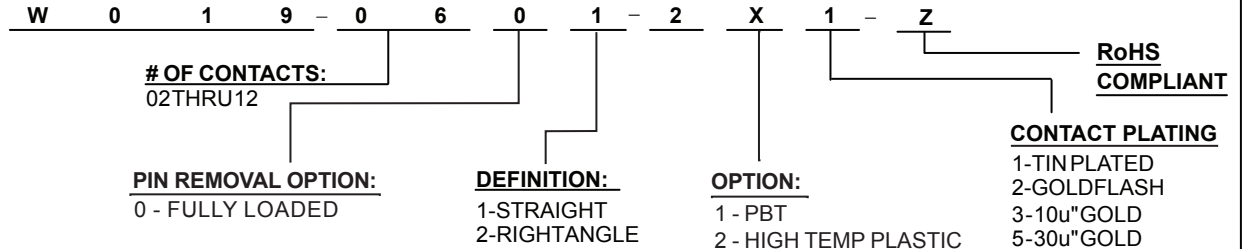

Rev	Drawn	Checked	Approved	Date
0	WHS	S.M.	S.M.	4/21/06

**SMP TECHNOLOGY, INC.**

HEADER; 2.54mm PITCH; 4 SIDES SHROUDED; MTA TYPE

6 POSITION, FULLY LOADED

SCALE: N/A

TOL. DEC. .X +/- 0.35 .XX +/- 0.25 .XXX +/- ANGLE +/- UNIT: mm

SERIES: W 0 1 9 - 0 6 0 1 - 2 X 1 - Z

Pg: 1