
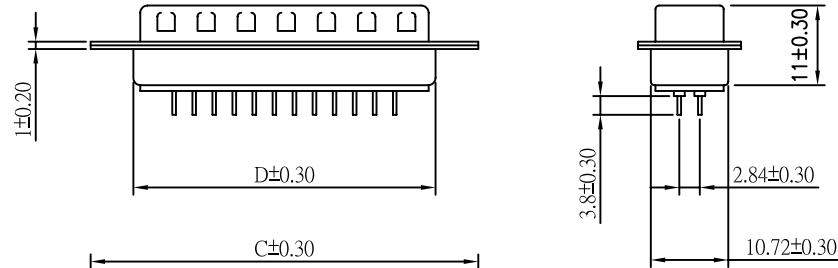




CUSTOMER COPY

REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

MALE

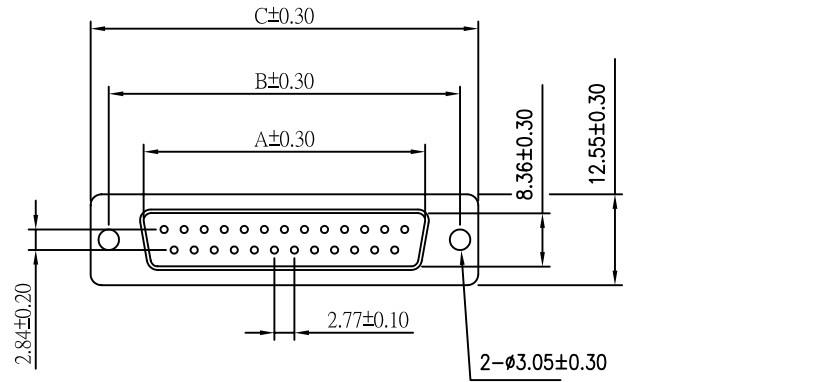

FEMALE

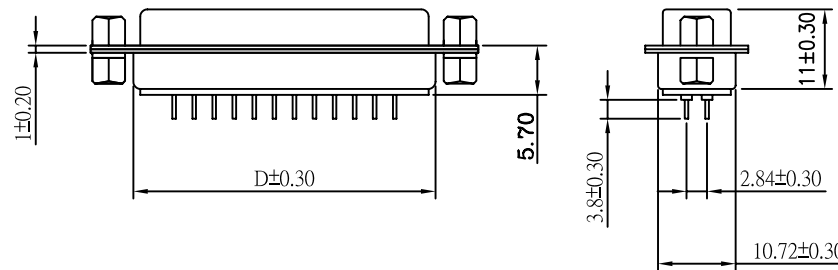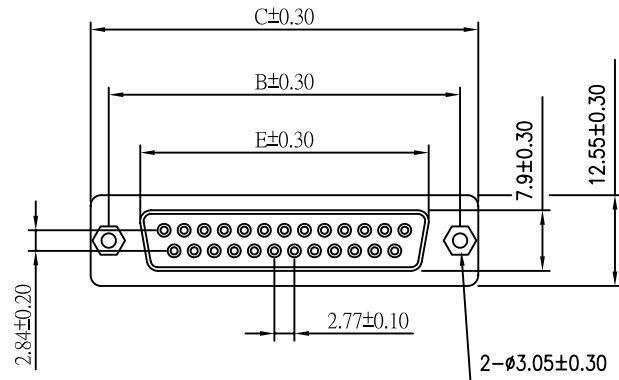

SPECIFICATION



- * Current Rating: 5 A
- * Withstanding Voltage: 1000 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 30 Milliohms MAX.
- * Operating Temperature: -40°C to +85°C

MATERIAL


- * Contact: Brass , Selective Gold or All Gold
- * Insulator: PBT & 30% G. F.
- * Shell: Steel , Tin Plated

ORDER INFORMATION

1452 X X X XX X

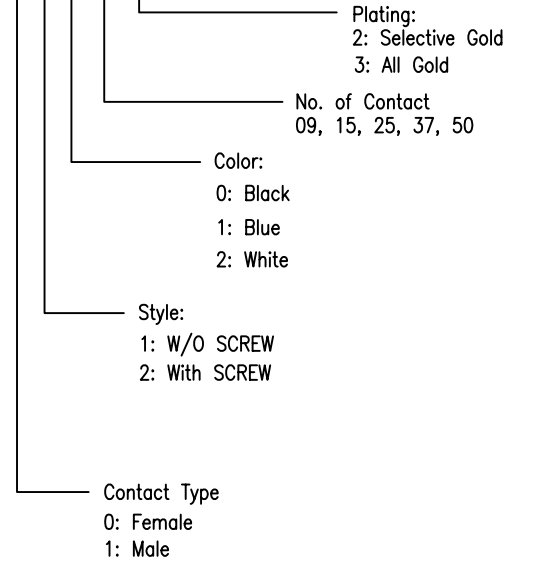

PART NO.	A	B	C	D	E
1452XXX09X	16.92	24.99	30.81	19.28	16.33
1452XXX15X	25.25	33.32	39.14	27.51	24.66
1452XXX25X	38.96	47.04	53.04	41.30	38.38
1452XXX37X	55.42	63.50	69.32	57.71	54.84
1452XXX50X	52.86	61.11	66.90	55.30	52.34



ACMELUX CO., LTD.
 TEL:886-2-85124595 FAX:886-2-85124322

0.0±	SCALE:	TITLE: D-SUB CONNECTOR	PART NO:
0.00±	UNIT: MM	DIP Type	APP BY:
0.000±		MATL: PBT + 30% G.F.	CHK BY:
DWG. NO. C145200		DR BY: JACK LIN	