
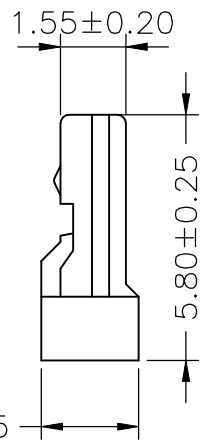
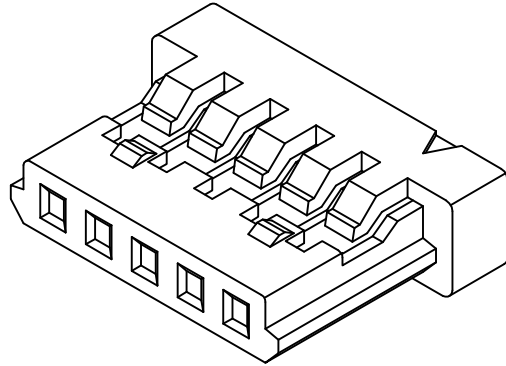
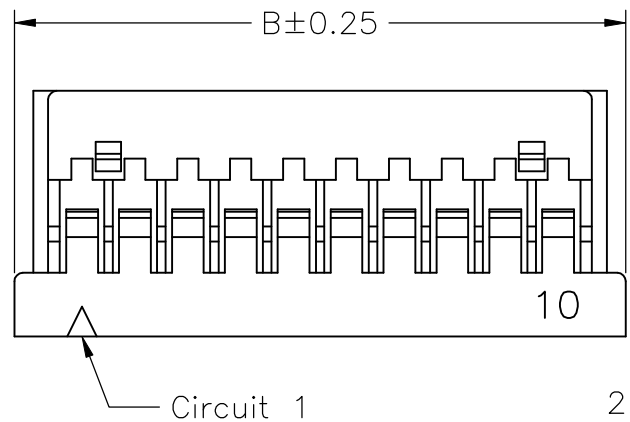


1 2 3 4 5 6 7 8 9 0

J  
I  
H  
G  
F  
E  
D  
C  
B  
A

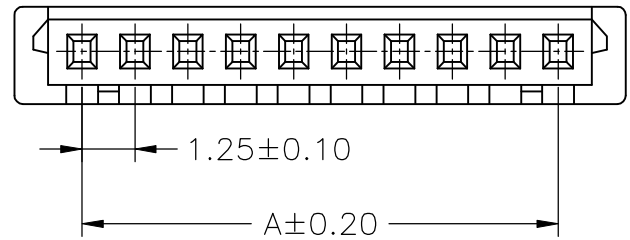

**SPECIFICATIONS**

Current Rating: 1A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 500MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Material: Nylon 66,UL94V-0

**Ordering Information & Dimensions**

PART NO.	Dimensions	
	A	B
DF14-H-02	1.25	4.45
DF14-H-03	2.50	5.70
DF14-H-04	3.75	6.95
DF14-H-05	5.00	8.20
DF14-H-06	6.25	9.45
DF14-H-07	7.50	10.70
DF14-H-08	8.75	11.95
DF14-H-09	10.00	13.20
DF14-H-10	11.25	14.45
DF14-H-11	12.50	15.70
DF14-H-12	13.75	16.95
DF14-H-13	15.00	18.20
DF14-H-14	16.25	19.45
DF14-H-15	17.50	20.70
DF14-H-20	23.75	26.95
DF14-H-25	30.00	33.20
DF14-H-30	36.25	39.45



煜倫有限公司

PART NO.	DF14-H-xx
DWG NO.	DF14-H-xx
FILE NO.	
UNIT / mm	SCALE 1:1

APPROVED BY	CY
DRAWING BY	
PROJECTION	

TOLERANCES ARE  
 .X  
 .XX  
 .XXX  
 AWG

DESCRIP TION:	1. 25mm PITCH HOUSING ULTRA LOW PROFILE			
AREA	REVISIONS	HK	DATE	