


MALE HEADER



ORDERING INFORMATION

HSH

50

G

SERIES INDICATOR

HSH =
.050" Shrouded
Male header



PLATING

G = Gold plated
T = Tin plated
SG = Gold plating
in contact
area, tin
plated
solder tails


**TOTAL
POSITIONS**
10 thru 100

OPTIONS:

SMT = Surface mount leads with
Hi-Temp insulator
P = Peg option (thru hole only)

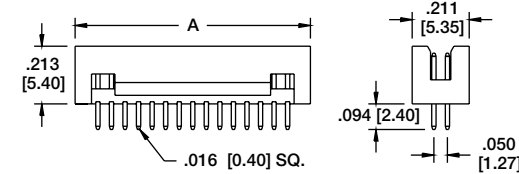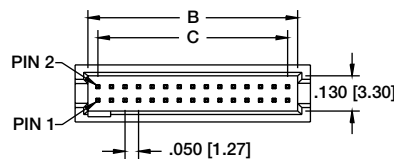



Recommended PCB Layout




Standard: With key & without peg

A = .050 X No. of Spaces + .168 [4.27]
B = .050 X No. of Spaces + .074 [1.87]
C = .050 X No. of Spaces

**HSH SERIES
SHROUDED MALE HEADER**

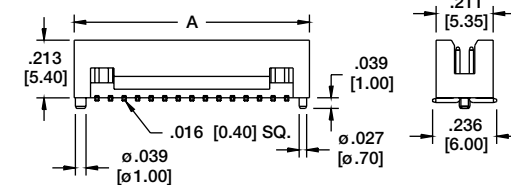

Recommended PCB Layout

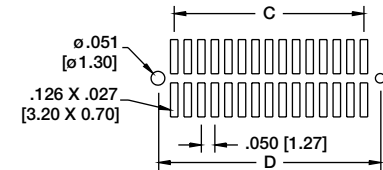


Standard: With key & with peg

A = .050 X No. of Spaces + .168 [4.27]
B = .050 X No. of Spaces + .074 [1.87]
C = .050 X No. of Spaces
D = .050 X No. of Spaces + .120 [3.05]

**HSH-SMT SERIES
SHROUDED MALE HEADER**

FEMALE HEADER



ORDERING INFORMATION

HFH

50

G

SERIES INDICATOR

HFH =
.050" Female header



PLATING

G = Gold plated
T = Tin plated
SG = Gold plating
in contact
area, tin
plated
solder tails


**TOTAL
POSITIONS**
10 thru 100

OPTIONS:

SMT = Surface mount leads
with Hi-Temp insulator
NP = No peg
NK = No Key
P = Peg option (thru hole only)

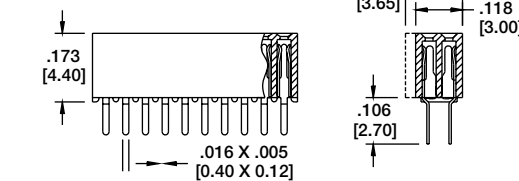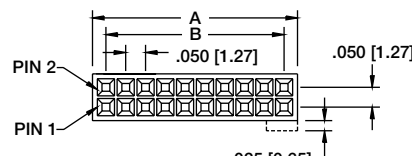



Recommended PCB Layout




Standard: With key & without peg

A = .050 X No. of Spaces + .068 [1.73]
B = .050 X No. of Spaces
C = .050 X No. of Spaces + .120 [3.05]

**HFH SERIES
SHROUDED FEMALE HEADER**

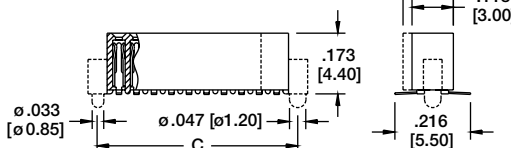

Recommended PCB Layout

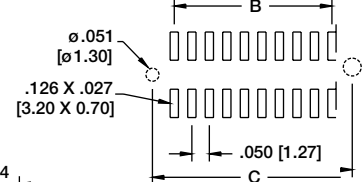

Standard: With key & with peg

A = .050 X No. of Spaces + .068 [1.73]
B = .050 X No. of Spaces
C = .050 X No. of Spaces + .120 [3.05]

**HFH-SMT SERIES
SHROUDED FEMALE HEADER**