
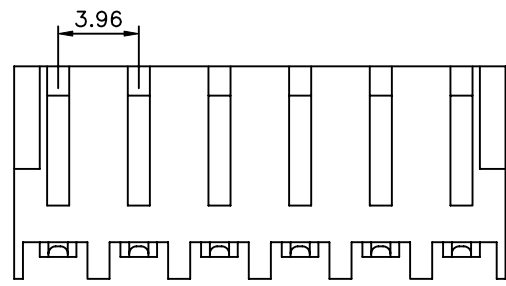
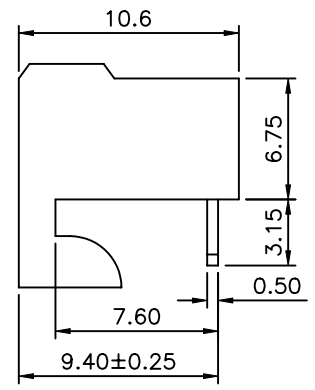
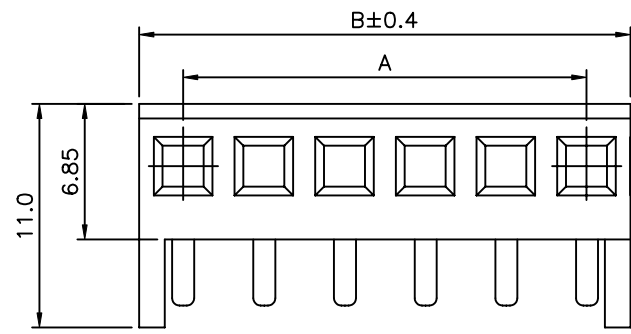


**SPECIFICATIONS:**  
 Current:5A Max.  
 Voltage:250V AC Max.  
 Insulation Resistance:50,000 Megohms Min.  
 Contact Resistance:6 Milliohms Max.  
 Dielectric Withstanding Voltage:1500V AC  
 Temperature: 0°C ~+75°C  
 Insulator:Nylon, UL 94V-2  
 Contact:Brass,Tin Plated  
 RoHS Compliant

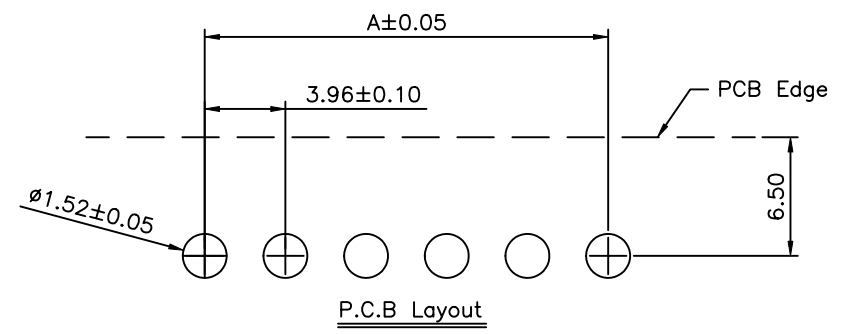

Contact	Dim.A	Dim.B
02	3.96	8.06
03	7.92	12.02
04	11.88	15.98
05	15.84	19.94
06	19.80	23.90
07	23.76	27.86
08	27.72	31.82
09	31.68	35.78
10	35.64	39.74
11	39.60	43.70
12	43.56	47.66
13	47.52	51.62
14	51.48	55.58
15	55.44	59.54
16	59.40	63.50

**AUK** A MEMBER OF AUK GROUP  
**太聯事業股份有限公司**  
**AUK CONTRACTORS CO., LTD.**

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.35 .XX ±0.10 .ANG						
PART No. KXXXS-H		MEI								
DRAWING No. KXXXS-H		CHECKED BY HZF								
		DRAWING BY JLT								
SCALE	NONE	REV.	BO	UNIT mm						
							BO	NEW RELEASE	HZF	10/05/2008
						NO.	REV.	REVISIONS	CHK	DATE