



- main
- catalog
- news
- request form
- company
- local reps
- distribution



Tel: (909)596-6298
Fax: (888)HO-CHIEN



2540 Series

0.1" x 0.1" ctr. IDC Socket for .05" ctr flat ribbon cable


Materials:

Contact: Phosphor Bronze
Contact Plating: Selective Gold
Contact Underplating: 0.00254mm [0.000100"] min. Nickel
Insulation: PBT & 30% glass fiber reinforced thermo plastic: UL94V-O
Color: Blackk

Recommended Cable: 1.27mm ctr. Ribbon Cable 28 AWG; [FC Series](#)
Recommended Mating Connector: [2530](#), [2531](#), [2532](#), [2533](#), Series

Electrical:

Contact Current Rating: 3 Amp
Contact resistance: 20 Milliohms Max.
Insulation Resistance: 1000 Megohms @ 1000V AC
Dielectric Withstanding: 1000V AC min. rms
Operation Temperature: -55°C to +105°C

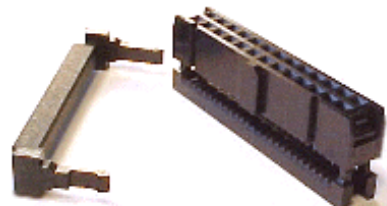


Ordering Part Number

<p>2540 -</p> <p>Series Number</p>	<p>□□</p> <p>Number of Positions</p> <p>6, 8, 10, 12, 14, 16, 18 20, 22, 24, 26, 30, 34 36, 40, 44, 50, 60, 64</p>	<p>□</p> <p>Contact Plating</p> <p>Blank: Gold Flash Selected F: 10u" Selected Gold E: 15u" Selected Gold D: 30u" Selected Gold</p>	<p>- □</p> <p>Options</p> <p>Blank: With Polarization/ and Strain Relief N: Without Center Polarization w Strain Relief 2: Without Strain Relief 2N: Without Polarization / Strain Relief</p>	<p>- □</p> <p>Color</p> <p>Blank: Black color G: Grey Color</p>
--	---	--	--	--

Plug Key Part Number: 2540-KB (Black Color)

Quantity: 10000pcs/Bag

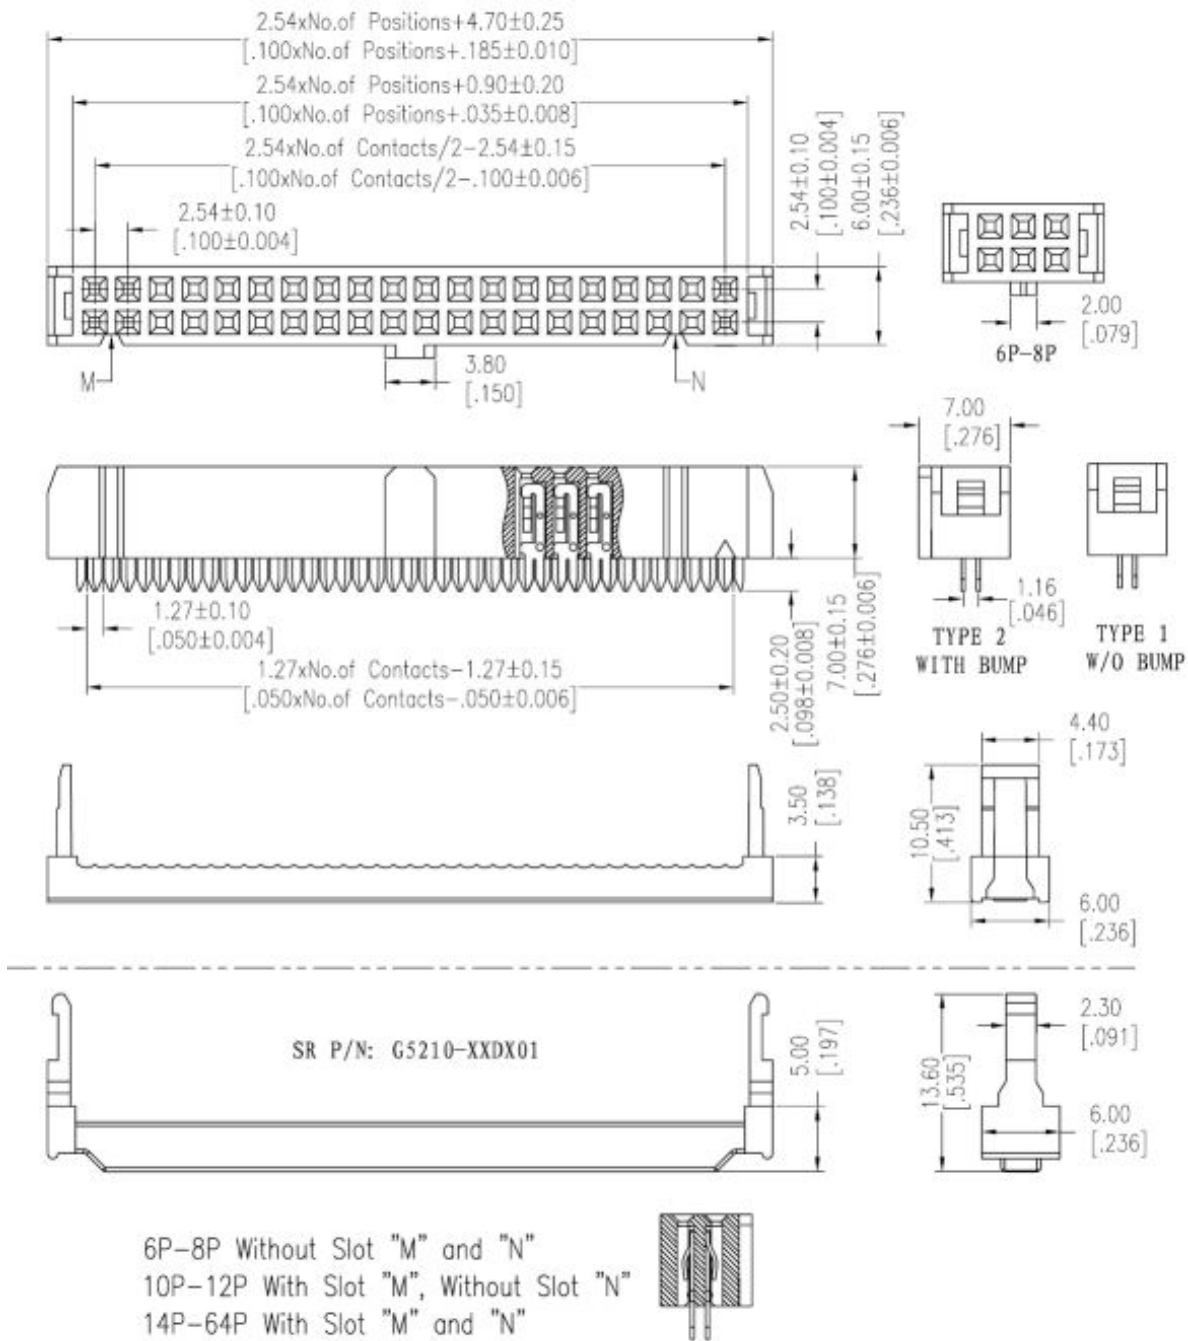

| [Main Menu](#) | [Online catalog](#) | [Local Rep](#) | [Distribution](#) |
| [News](#) | [Company](#) | [Request Form](#) | [E-Mail](#) |

Copyright © 1995-2013 Ho Chien Electronic Group, Inc. All rights reserved.