


- Y= 0: Gold plated 0.25µm
- Y= 1: Gold flash
- Y= 4: Tin plated
- Y= 7: Selective Gold flash
- Y= 8: Selective Gold 0.25µm

Recommended P.C. Board Layout
P.C.B. TOLERANCE 4005

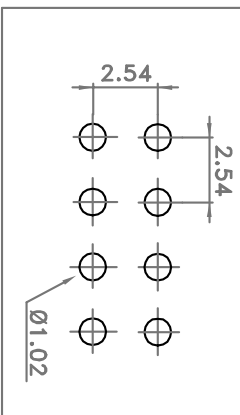

B	19-02-07	Updating quote: 3.10 was 3.00	
A	28-11-04	UPDATING	
INDEX	DATE		MODIFICATION
Material		Pin: Copper alloy	Insulator: Nylon 6T
Platings		See plan	
Protection		XX=N= Number of contacts (04÷80)	
Denomination		FEMALE HEADER,	
DUAL ROW, PLASTIC HEIGHT 7.1mm		pitch 2.54mm.	
Cod.	47797701XX4Y0	File:	47797701XX4Y0
Dis. Nr.		Design	Chiappini R.
Index		Contr.	Pandiscia M.
		Date	25-10-02
		UNIT: mm	general tolerance
			X: ±0.20mm
			Y: ±0.30mm