
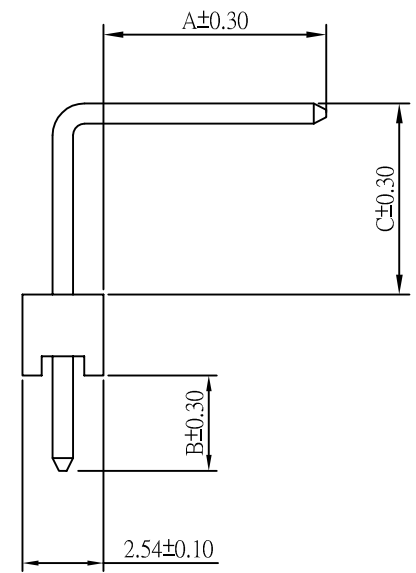
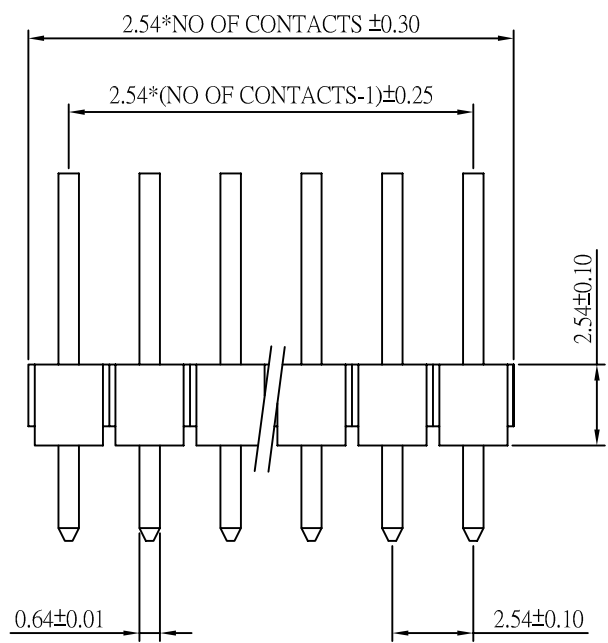


REV	ECN NO.	APP.	DATE
A	NEW DESIGN		

CUSTOMER COPY

ORDER INFORMATION

184 00 XX XX X

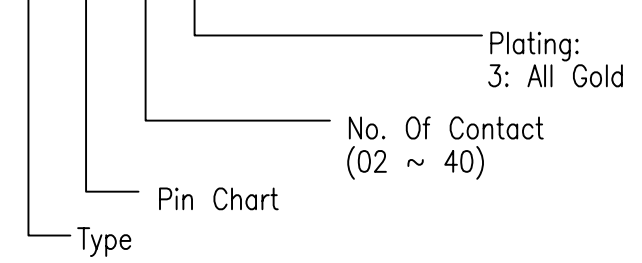

SPECIFICATION

- * Current Rating: 3 A
- * Withstanding Voltage: 800 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms min.
- * Contact Resistance: 30 Milliohms max.
- * Operating Temperature: -40°C to +85°C
- * RETENTION FORCE: 750g MIN.

MATERIAL


- * Contact: Brass , 0.64mm square post
- * Insulator: PBT & 30% G.F.
- * Plating: Gold

Pin Chart

No.	A	B	C
00	6.00	3.00	4.40
01	6.00	3.00	3.00
02	3.40	3.40	3.13
03	7.50	3.00	2.50
04	3.60	3.00	1.86
05	15.00	3.00	2.85
06	6.00	3.00	2.80

Pin Chart

No.	A	B	C
07	3.60	3.00	4.40
08	1.50	1.50	0.64
09	8.00	3.00	4.00
10	6.00	0.60	5.40
11	7.85	3.00	3.82
12	6.00	3.00	3.55
13			

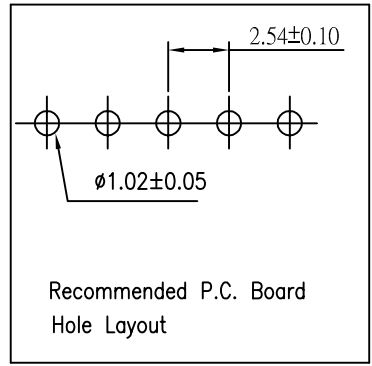

ACMELUX CO., LTD.

TEL:886-2-85124595 FAX:886-2-85124322

0.0±	SCALE:	TITLE:	PART NO: C111300
0.00±	UNIT: MM	2.54MM (.100") Center Pin HEADER R/A Single Row	APP BY:
0.000±			CHK BY:
		MATL:	DR BY: JACK LIN
		DWG. NO. C18400XXXXX	