

TENTATIVE TOSHIBA MOS DIGITAL INTEGRATED CIRCUIT SILICON GATE CMOS  
524,288-WORD BY 8-BIT FULL CMOS STATIC RAM

## DESCRIPTION

The TC55V040FT/TR is a 4,194,304-bit static random access memory (SRAM) organized as 524,288 words by 8 bits. Fabricated using Toshiba's CMOS Silicon gate process technology, this device operates from a single 2.7 to 3.6V power supply. Advanced circuit technology provides both high speed and low power at an operating current of 3 mA/MHz and a minimum cycle time of 70 ns. It is automatically placed in low-power mode at 0.5  $\mu$ A standby current (at  $V_{DD}=3V$ ,  $T_a=25^\circ C$ , maximum) when chip enable ( $\overline{CE1}$ ) is asserted high or ( $CE2$ ) is asserted low. There are three control inputs.  $\overline{CE1}$  and  $CE2$  are used to select the device and for data retention control, and output enable ( $\overline{OE}$ ) provides fast memory access. This device is well suited to various microprocessor system applications where high speed, low power and battery backup are required. And, with a guaranteed operating range of  $-40^\circ$  to  $85^\circ C$ , the TC55V040FT/TR can be used in environments exhibiting extreme temperature conditions. The TC55V040FT/TR is available in normal and reverse pinout plastic 40-pin thin-small-outline package (TSOP).

## FEATURES

- Low-power dissipation  
Operating: 10.8 mW/MHz (typical)
- Single power supply voltage of 2.7 to 3.6V
- Power down features using  $\overline{CE1}$  and  $CE2$
- Data retention supply voltage of 1.5 to 3.6V
- Direct TTL compatibility for all inputs and outputs
- Wide operating temperature range of  $-40^\circ$  to  $85^\circ C$
- Standby current (maximum)

|      |           |
|------|-----------|
| 3.6V | 7 $\mu$ A |
| 3.0V | 5 $\mu$ A |


- Access Times (maximum):

|                              | TC55V040FT/TR |       |        |
|------------------------------|---------------|-------|--------|
|                              | -70           | -85   | -10    |
| Access Time                  | 70 ns         | 85 ns | 100 ns |
| $\overline{CE1}$ Access Time | 70 ns         | 85 ns | 100 ns |
| $CE2$ Access Time            | 70 ns         | 85 ns | 100 ns |
| $\overline{OE}$ Access Time  | 35 ns         | 45 ns | 50 ns  |

- Package:

TSOP I 40-P-1014-0.50 (FT) (Weight:0.32g typ)  
TSOP I 40-P-1014-0.50A (TR) (Weight:0.32g typ)

## PIN ASSIGNMENT (TOP VIEW)

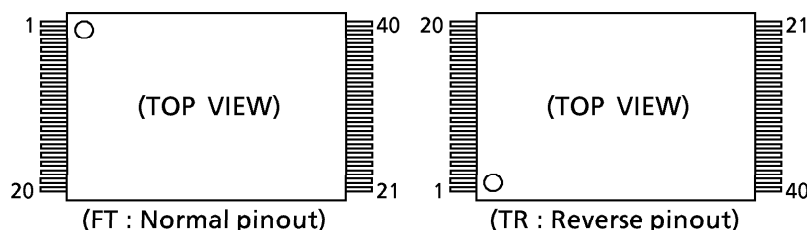

## PIN NAMES

|                          |                            |
|--------------------------|----------------------------|
| A0 to A18                | Address Inputs             |
| $\overline{CE1}$ , $CE2$ | Chip Enable Input          |
| R/W                      | Read / Write Control Input |
| $\overline{OE}$          | Output Enable Input        |
| I/O1 to I/O8             | Data Inputs / Outputs      |
| $V_{DD}$                 | Power                      |
| GND                      | Ground                     |
| NC                       | No Connection              |


## (TSOP)

|          |     |                  |     |                 |      |      |      |      |     |          |          |      |      |      |      |     |    |    |     |     |
|----------|-----|------------------|-----|-----------------|------|------|------|------|-----|----------|----------|------|------|------|------|-----|----|----|-----|-----|
| Pin No.  | 1   | 2                | 3   | 4               | 5    | 6    | 7    | 8    | 9   | 10       | 11       | 12   | 13   | 14   | 15   | 16  | 17 | 18 | 19  | 20  |
| Pin Name | A16 | A15              | A14 | A13             | A12  | A11  | A9   | A8   | R/W | CE2      | NC       | NC   | A18  | A7   | A6   | A5  | A4 | A3 | A2  | A1  |
| Pin No.  | 21  | 22               | 23  | 24              | 25   | 26   | 27   | 28   | 29  | 30       | 31       | 32   | 33   | 34   | 35   | 36  | 37 | 38 | 39  | 40  |
| Pin Name | A0  | $\overline{CE1}$ | GND | $\overline{OE}$ | I/O1 | I/O2 | I/O3 | I/O4 | NC  | $V_{DD}$ | $V_{DD}$ | I/O5 | I/O6 | I/O7 | I/O8 | A10 | NC | NC | GND | A17 |

980910EBA1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

**BLOCK DIAGRAM**

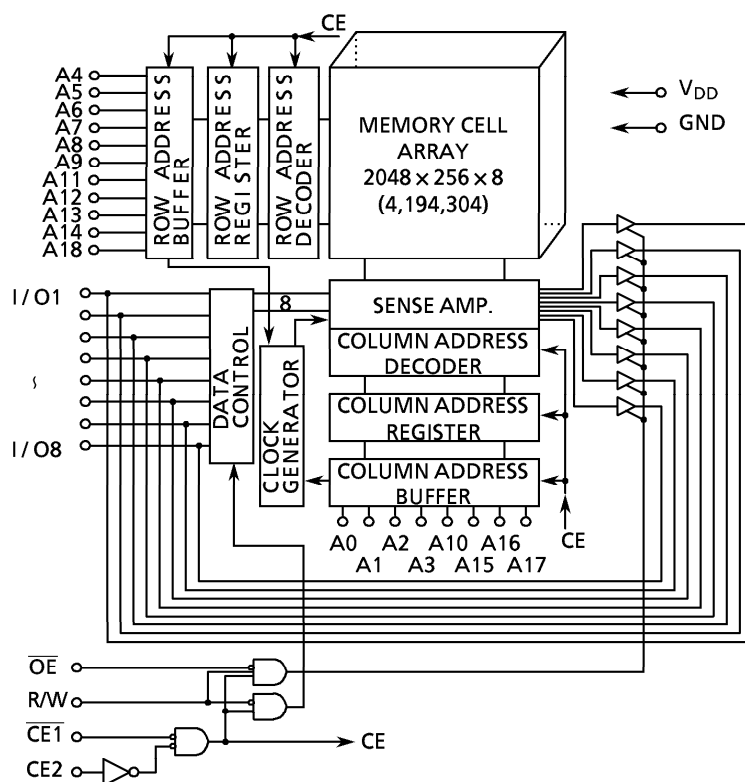

**OPERATING MODE**

| MODE            | $\overline{CE1}$ | CE2 | $\overline{OE}$ | R/W | I/O1 to I/O8     | POWER            |
|-----------------|------------------|-----|-----------------|-----|------------------|------------------|
| Read            | L                | H   | L               | H   | D <sub>OUT</sub> | I <sub>DDO</sub> |
| Write           | L                | H   | x               | L   | D <sub>IN</sub>  | I <sub>DDO</sub> |
| Output Deselect | L                | H   | H               | H   | High-Z           | I <sub>DDO</sub> |
| Standby         | H                | x   | x               | x   | High-Z           | I <sub>DDS</sub> |
|                 | x                | L   | x               | x   | High-Z           | I <sub>DDS</sub> |

Note: x = don't care. H = logic high. L = logic low.

**MAXIMUM RATINGS**

| SYMBOL              | RATING                       | VALUE                          | UNIT |
|---------------------|------------------------------|--------------------------------|------|
| V <sub>DD</sub>     | Power Supply Voltage         | - 0.3 to 4.6                   | V    |
| V <sub>IN</sub>     | Input Voltage                | - 0.3 * to 4.6                 | V    |
| V <sub>I/O</sub>    | Input/Output Voltage         | - 0.5 to V <sub>DD</sub> + 0.5 | V    |
| P <sub>D</sub>      | Power Dissipation            | 0.6                            | W    |
| T <sub>solder</sub> | Soldering Temperature (10 s) | 260                            | °C   |
| T <sub>strg</sub>   | Storage Temperature          | - 55 to 150                    | °C   |
| T <sub>opr</sub>    | Operating Temperature        | - 40 to 85                     | °C   |

\* - 3.0 V when measured at a pulse width of 30 ns.

**DC RECOMMENDED OPERATING CONDITIONS (Ta = -40° to 85°C)**

| SYMBOL          | PARAMETER                     | MIN     | TYP | MAX                   | UNIT |
|-----------------|-------------------------------|---------|-----|-----------------------|------|
| V <sub>DD</sub> | Power Supply Voltage          | 2.7     | -   | 3.6                   | V    |
| V <sub>IH</sub> | Input High Voltage            | 2.2     | -   | V <sub>DD</sub> + 0.3 | V    |
| V <sub>IL</sub> | Input Low Voltage             | - 0.3 * | -   | 0.6                   | V    |
| V <sub>DH</sub> | Data Retention Supply Voltage | 1.5     | -   | 3.6                   | V    |

\* - 3.0 V when measured at a pulse width of 30 ns.

**DC CHARACTERISTICS (Ta = -40° to 85°C, V<sub>DD</sub> = 2.7 to 3.6V)**

| SYMBOL                      | PARAMETER              | TEST CONDITION   | MIN                                | TYP              | MAX   | UNIT |     |     |    |
|-----------------------------|------------------------|--|------------------------------------|------------------|-------|------|-----|-----|----|
| I <sub>IL</sub>             | Input Leakage Current  | V <sub>IN</sub> = 0 V to V <sub>DD</sub>   | -                                  | -                | ± 1.0 | μA   |     |     |    |
| I <sub>OH</sub>             | Output High Current    | V <sub>OH</sub> = V <sub>DD</sub> - 0.5 V  | - 0.5                              | -                | -     | mA   |     |     |    |
| I <sub>OL</sub>             | Output Low Current     | V <sub>OL</sub> = 0.4 V  | 2.1                                | -                | -     | mA   |     |     |    |
| I <sub>LO</sub>             | Output Leakage Current | CE1 = V <sub>IH</sub> or CE2 = V <sub>IL</sub> or R/W = V <sub>IL</sub> or OE = V <sub>IH</sub><br>V <sub>OUT</sub> = 0 V to V <sub>DD</sub>                 | -                                  | -                | ± 1.0 | μA   |     |     |    |
| I <sub>DDO1</sub>           | Operating Current      | CE1 = V <sub>IL</sub> and CE2 = V <sub>IH</sub> and<br>R/W = V <sub>IH</sub> and I <sub>OUT</sub> = 0 mA<br>Other Input = V <sub>IH</sub> /V <sub>IL</sub>   | V <sub>DD</sub> =<br>3 V ± 10%     | Tcycle = min     | -70   | -    | -   | 40  | mA |
|                             |                        |  |                                    | -85,-10          | -     | -    | 35  |     |    |
|                             |                        |  | V <sub>DD</sub> =<br>3.3 V ± 0.3 V | Tcycle = 1 μs    | -     | -    | 10  |     |    |
|                             |                        |  |                                    | Tcycle = min     | -70   | -    | -   | 45  |    |
| I <sub>DDO2</sub>           | Operating Current      | CE1 = 0.2 V and<br>CE2 = V <sub>DD</sub> - 0.2 V and<br>R/W = V <sub>DD</sub> - 0.2 V, I <sub>OUT</sub> = 0 mA<br>Other Inputs = V <sub>DD</sub> - 0.2V/0.2V | V <sub>DD</sub> =<br>3 V ± 10%     | Tcycle = min     | -70   | -    | -   | 35  |    |
|                             |                        |  |                                    | -85,-10          | -     | -    | 30  |     |    |
|                             |                        |  | V <sub>DD</sub> =<br>3.3 V ± 0.3 V | Tcycle = 1 μs    | -     | -    | 5   |     |    |
|                             |                        |  |                                    | Tcycle = min     | -70   | -    | -   | 40  |    |
| I <sub>DDS1</sub>           | Standby Current        | CE1 = V <sub>IH</sub> or CE2 = V <sub>IL</sub>   | V <sub>DD</sub> =<br>3 V ± 10%     | Tcycle = min     | -70   | -    | -   | 40  |    |
|                             |                        |  |                                    | -85,-10          | -     | -    | 35  |     |    |
| I <sub>DDS2</sub><br>(Note) | Standby Current        | CE1 = V <sub>DD</sub> - 0.2 V<br>or CE2 = 0.2 V<br>V <sub>DD</sub> = 1.5 to 3.6 V  | V <sub>DD</sub> =<br>3 V ± 10%     | Ta = 25°C        | -     | -    | -   | 0.6 |    |
|                             |                        |  |                                    | Ta = -40 to 85°C | -     | -    | 6   |     |    |
|                             |                        |  | V <sub>DD</sub> =<br>3.3 V ± 0.3 V | Ta = 25°C        | -     | -    | 0.7 |     |    |
|                             |                        |  |                                    | Ta = -40 to 85°C | -     | -    | 7   |     |    |
|                             |                        |  | V <sub>DD</sub> = 3 V              | Ta = 25°C        | -     | 0.05 | 0.5 |     |    |
|                             |                        |  |                                    | Ta = -40 to 40°C | -     | -    | 1   |     |    |
| Ta = -40 to 85°C            | -                      | -  | 5                                  |                  |       |      |     |     |    |

Note: In standby mode with CE1 ≥ V<sub>DD</sub> - 0.2V, these limits are assured for the condition CE2 ≥ V<sub>DD</sub> - 0.2V or CE2 ≤ 0.2V.

**CAPACITANCE (Ta = 25°C, f = 1 MHz)**

| SYMBOL           | PARAMETER          | TEST CONDITION         | MAX | UNIT |
|------------------|--------------------|------------------------|-----|------|
| C <sub>IN</sub>  | Input Capacitance  | V <sub>IN</sub> = GND  | 10  | pF   |
| C <sub>OUT</sub> | Output Capacitance | V <sub>OUT</sub> = GND | 10  | pF   |

Note: This parameter is periodically sampled and is not 100% tested.

**AC CHARACTERISTICS AND OPERATING CONDITIONS (Ta = -40° to 85°C, V<sub>DD</sub> = 2.7 to 3.6V)**

**READ CYCLE**

| SYMBOL           | PARAMETER                           | TC55V040FT/TR |     |     |     |     |     | UNIT |
|------------------|-------------------------------------|---------------|-----|-----|-----|-----|-----|------|
|                  |                                     | -70           |     | -85 |     | -10 |     |      |
|                  |                                     | MIN           | MAX | MIN | MAX | MIN | MAX |      |
| t <sub>RC</sub>  | Read Cycle Time                     | 70            | -   | 85  | -   | 100 | -   | ns   |
| t <sub>ACC</sub> | Address Access Time                 | -             | 70  | -   | 85  | -   | 100 |      |
| t <sub>CO1</sub> | Chip Enable (CE1) Access Time       | -             | 70  | -   | 85  | -   | 100 |      |
| t <sub>CO2</sub> | Chip Enable (CE2) Access Time       | -             | 70  | -   | 85  | -   | 100 |      |
| t <sub>OE</sub>  | Output Enable Access Time           | -             | 35  | -   | 45  | -   | 50  |      |
| t <sub>COE</sub> | Chip Enable Low to Output Active    | 5             | -   | 5   | -   | 5   | -   |      |
| t <sub>OEE</sub> | Output Enable Low to Output Active  | 0             | -   | 0   | -   | 0   | -   |      |
| t <sub>OD</sub>  | Chip Enable High to Output High-Z   | -             | 30  | -   | 35  | -   | 40  |      |
| t <sub>ODO</sub> | Output Enable High to Output High-Z | -             | 30  | -   | 35  | -   | 40  |      |
| t <sub>OH</sub>  | Output Data Hold Time               | 10            | -   | 10  | -   | 10  | -   |      |

**WRITE CYCLE**

| SYMBOL           | PARAMETER                   | TC55V040FT/TR |     |     |     |     |     | UNIT |
|------------------|-----------------------------|---------------|-----|-----|-----|-----|-----|------|
|                  |                             | -70           |     | -85 |     | -10 |     |      |
|                  |                             | MIN           | MAX | MIN | MAX | MIN | MAX |      |
| t <sub>WC</sub>  | Write Cycle Time            | 70            | -   | 85  | -   | 100 | -   | ns   |
| t <sub>WP</sub>  | Write Pulse Width           | 50            | -   | 55  | -   | 60  | -   |      |
| t <sub>CW</sub>  | Chip Enable to End of Write | 60            | -   | 70  | -   | 80  | -   |      |
| t <sub>AS</sub>  | Address Setup Time          | 0             | -   | 0   | -   | 0   | -   |      |
| t <sub>WR</sub>  | Write Recovery Time         | 0             | -   | 0   | -   | 0   | -   |      |
| t <sub>ODW</sub> | R/W Low to Output High-Z    | -             | 30  | -   | 35  | -   | 40  |      |
| t <sub>OEW</sub> | R/W High to Output Active   | 0             | -   | 0   | -   | 0   | -   |      |
| t <sub>DS</sub>  | Data Setup Time             | 30            | -   | 35  | -   | 40  | -   |      |
| t <sub>DH</sub>  | Data Hold Time              | 0             | -   | 0   | -   | 0   | -   |      |

**AC TEST CONDITIONS**

Output load: 30 pF + one TTL gate (-70)

: 100 pF + one TTL gate (-85, -10)

Input pulse level: 0.4 V, 2.4 V


Timing measurements: 1.5 V

Reference level: V<sub>DD</sub> × 0.5


t<sub>R</sub>, t<sub>F</sub>: 5 ns

**TIMING DIAGRAMS**


**READ CYCLE (See Note 1)**

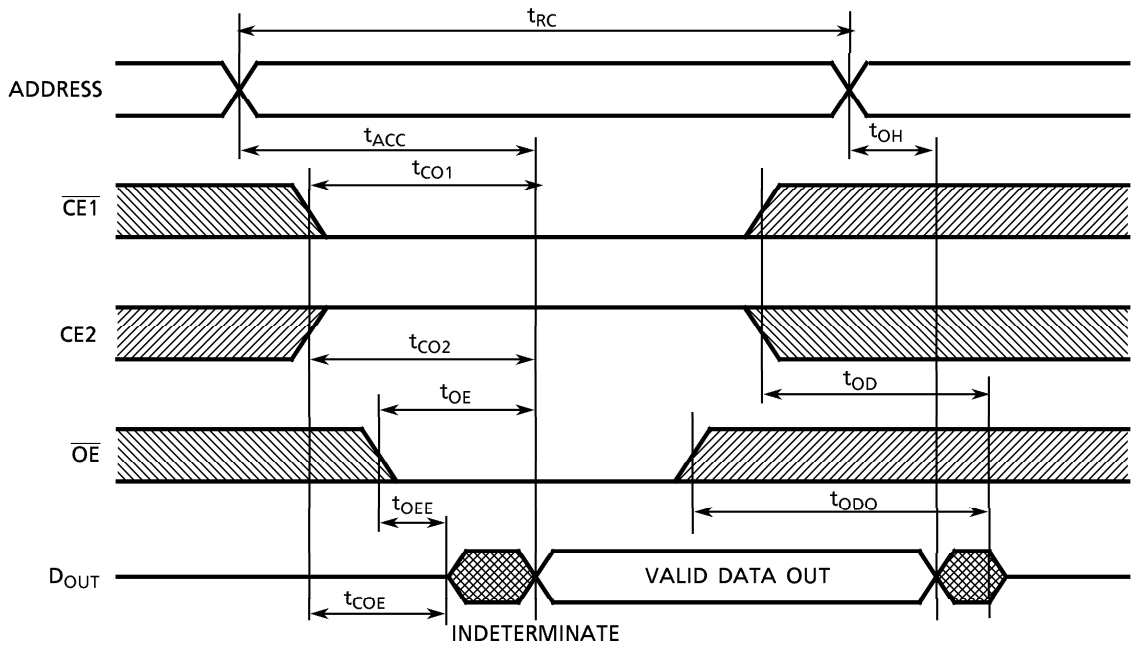


**WRITE CYCLE 1 (R/W CONTROLLED) (See Note 4)**

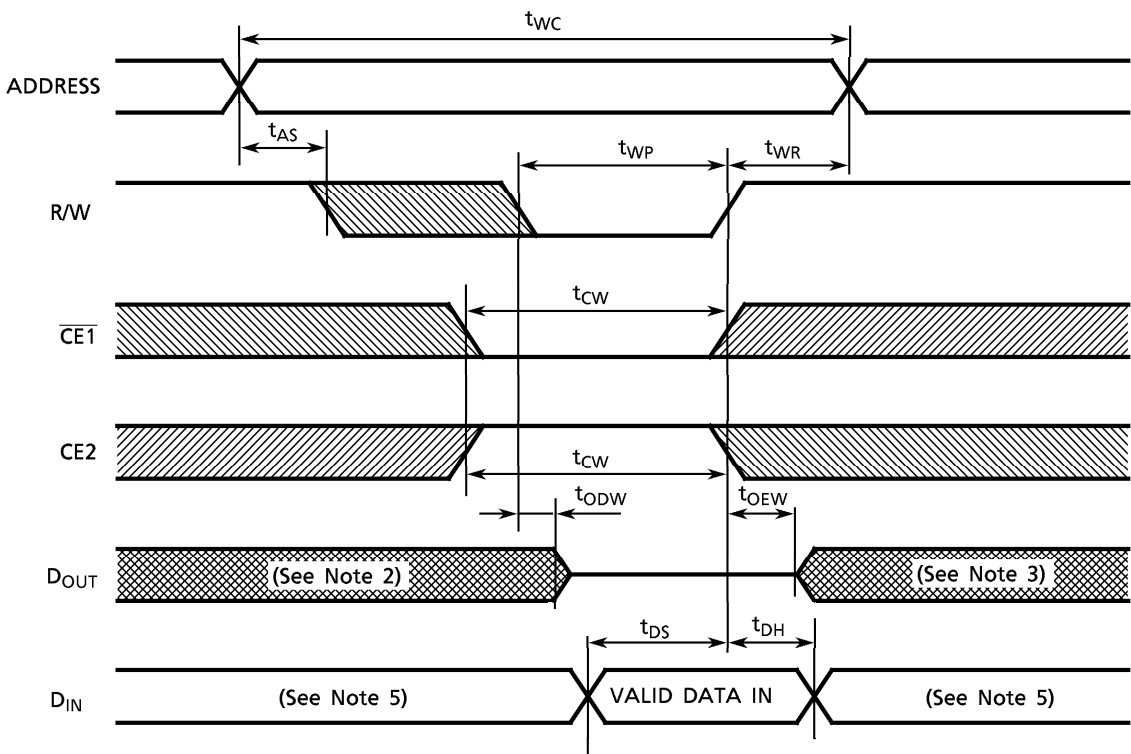

WRITE CYCLE 2 (CE1 CONTROLLED) (See Note 4)

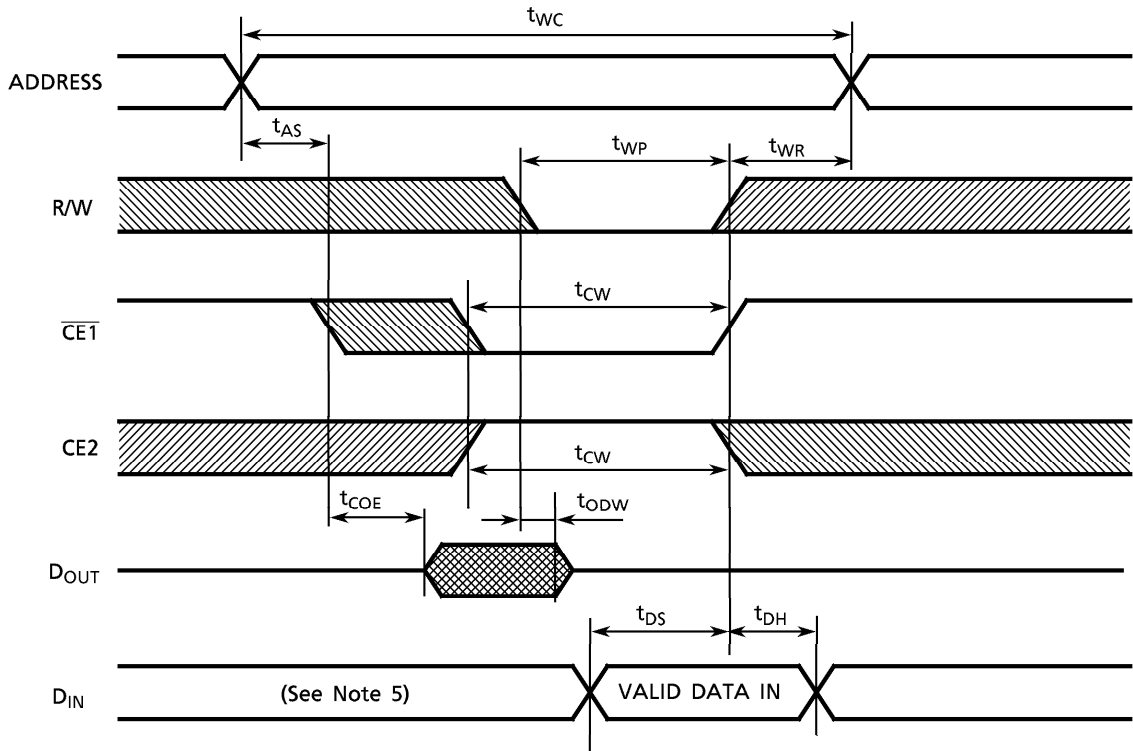

WRITE CYCLE 3 (CE2 CONTROLLED) (See Note 4)

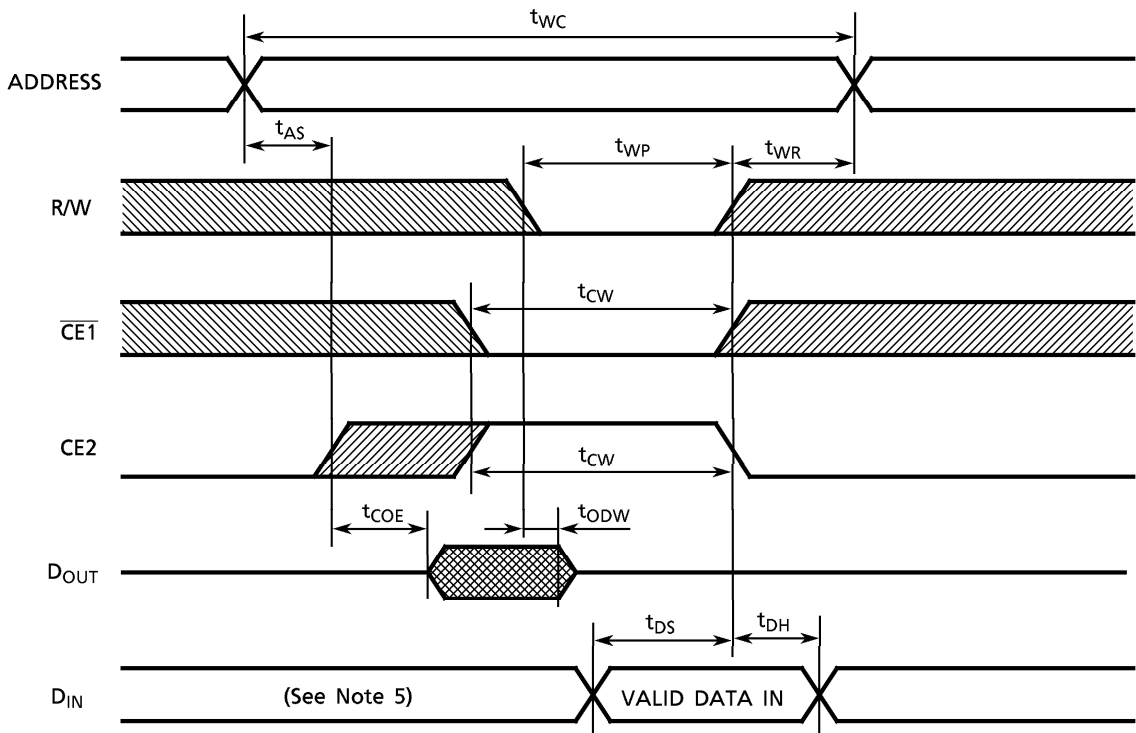


- Note:
- (1) R/W remains HIGH for the read cycle.
  - (2) If  $\overline{CE1}$  goes LOW (or CE2 goes HIGH) coincident with or after R/W goes LOW, the outputs will remain at high impedance.
  - (3) If  $\overline{CE1}$  goes HIGH (or CE2 goes LOW) coincident with or before R/W goes HIGH, the outputs will remain at high impedance.
  - (4) If  $\overline{OE}$  is HIGH during the write cycle, the outputs will remain at high impedance.
  - (5) Because I/O signals may be in the output state at this time, input signals of reverse polarity must not be applied.

**DATA RETENTION CHARACTERISTICS (Ta = -40° to 85°C)**


| SYMBOL     | PARAMETER                                 |                         | MIN  | TYP | MAX | UNIT |               |
|------------|---|-------------------------|--|-----|-----|------|---------------|
| $V_{DH}$   | Data Retention Supply Voltage             |                         | 1.5  | -   | 3.6 | V    |               |
| $I_{DSS2}$ | Standby Current                           | $V_{DH} = 3.0\text{ V}$ | $T_a = -40^\circ\text{ to }40^\circ\text{C}$ | -   | -   | 1    | $\mu\text{A}$ |
|            |   |                         | $T_a = -40^\circ\text{ to }85^\circ\text{C}$ | -   | -   | 5    |               |
|            |   | $V_{DH} = 3.6\text{ V}$ | $T_a = -40^\circ\text{ to }85^\circ\text{C}$ | -   | -   | 7    |               |
| $t_{CDR}$  | Chip Deselect to Data Retention Mode Time |                         | 0  | -   | -   | nS   |               |
| $t_R$      | Recovery Time                             |                         | $t_{RC}$ (See Note)                          | -   | -   | nS   |               |

Note: Read cycle time

**$\overline{CE1}$  CONTROLLED DATA RETENTION MODE (See Note 1)**

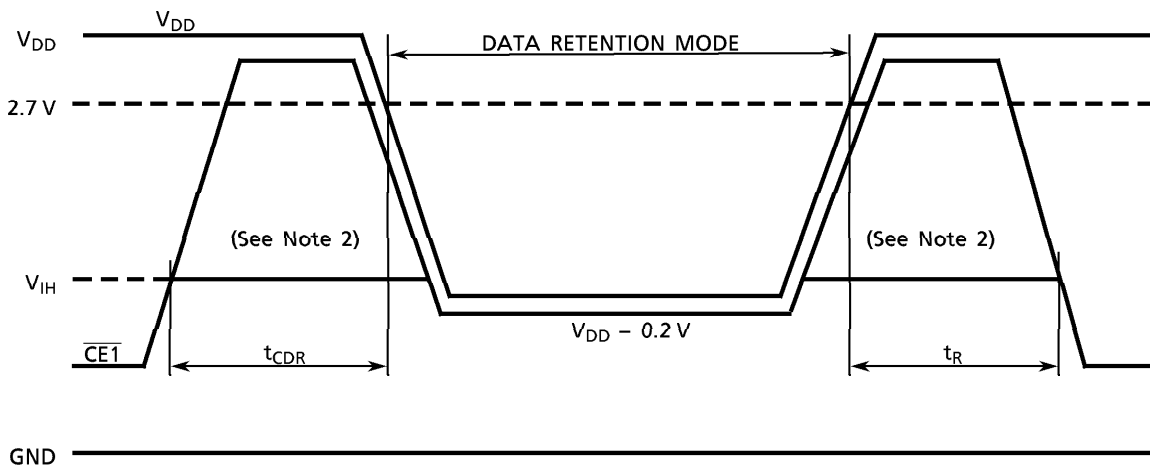

**CE2 CONTROLLED DATA RETENTION MODE (See Note 3)**

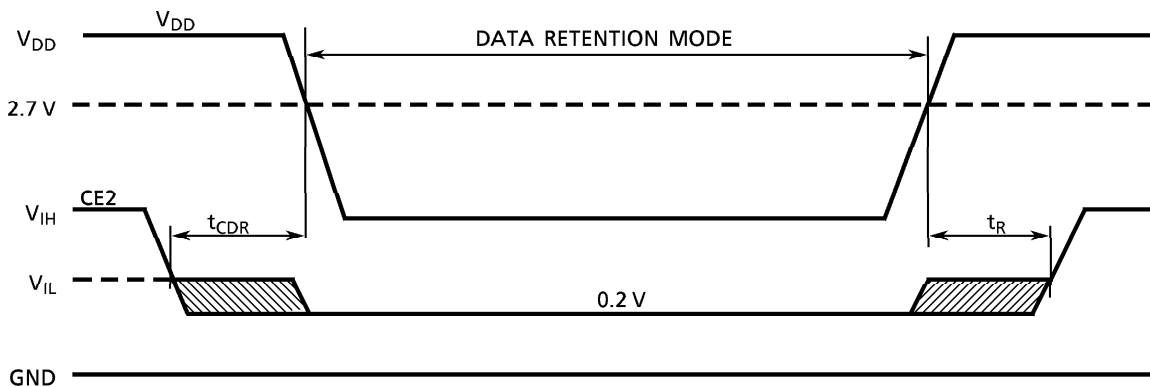


- Note:
- (1) In  $\overline{\text{CE1}}$  controlled data retention mode, minimum standby current mode is entered when  $\text{CE2} \leq 0.2 \text{ V}$  or  $\text{CE2} \geq V_{\text{DD}} - 0.2 \text{ V}$ .
  - (2) When  $\overline{\text{CE1}}$  is operating at the  $V_{\text{IH}}$  level (2.2 V), the operating current is given by  $I_{\text{DDSI}}$  during the transition of  $V_{\text{DD}}$  from 3.6 to 2.4 V.
  - (3) In  $\text{CE2}$  controlled data retention mode, minimum standby current mode is entered when  $\text{CE2} \leq 0.2 \text{ V}$ .



PACKAGE DIMENSIONS (TSOP I 40-P-1014-0.50)


Units in mm

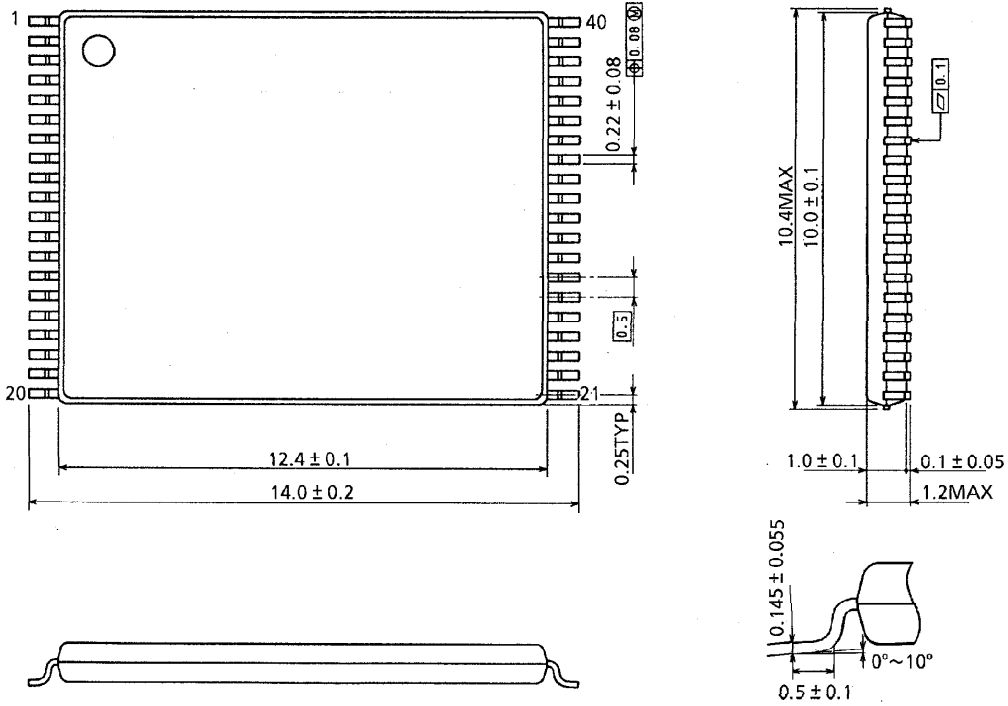

Weight: 0.32 g (typ)

PACKAGE DIMENSIONS (TSOP I 40-P-1014-0.50A)

Units in mm

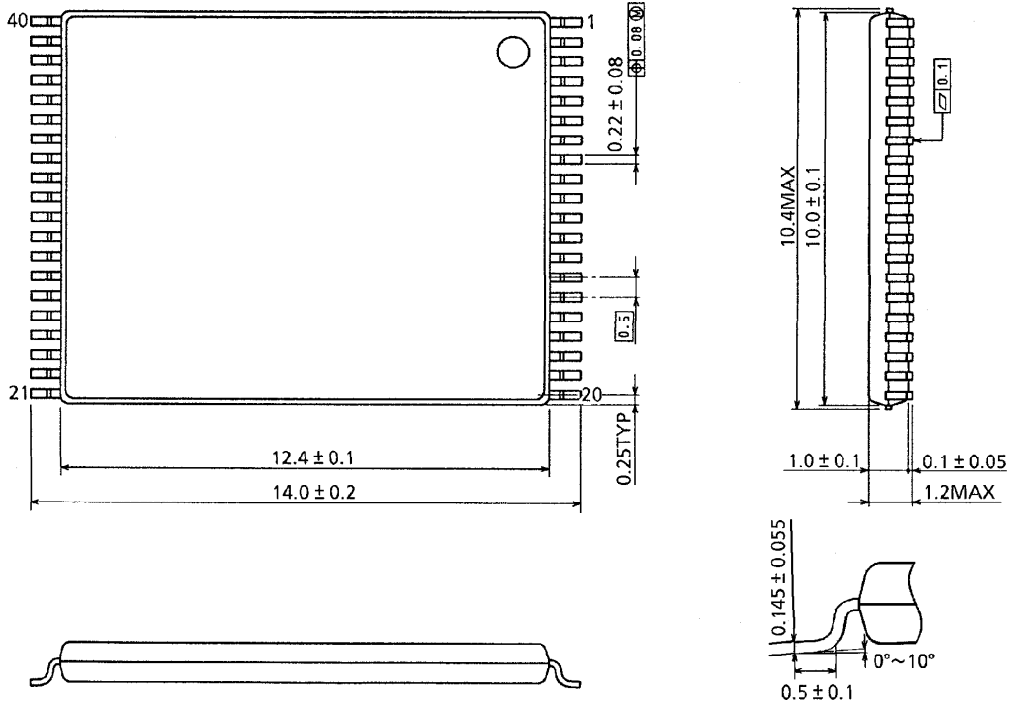

Weight: 0.32 g (typ)