
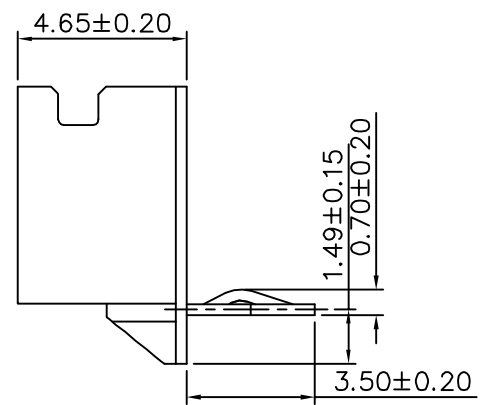


SPECIFICATIONS

Current Rating: 1A AC, DC
 Voltage Rating: 100V AC, DC
 Withstanding Voltage: 800V AC/Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Temperature Range: -25°C To +85°C
 Pin Material: Phosphor Bronze, Tin Plated
 Material: Nylon66, UL94V-0

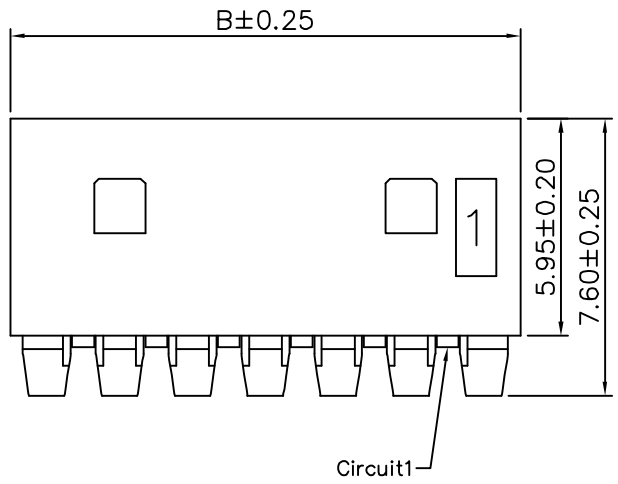

Circuit	A	B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY MEI		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.38 .XX ±0.25 ANG.					
PART NO. MHXXR		CHECKED BY BECKY							
DRAWING No. MHXXR		DRAWING BY HZF							
SCALE	NONE	REV.	A0		UNIT mm		NO.REV.	REVISIONS	CHK