


SIZE	Part Number			Dimensions			
	Gold Flash	15 μ Gold	30 μ Gold	"A" Dim		"B" Dim	
2	6900-1198	6900-1222	6900-1246	N/A	N/A	.086	(2.18)
4	6900-1199	6900-1223	6900-1247	.100	(2.54)	.186	(4.72)
6	6900-1200	6900-1224	6900-1248	.200	(5.08)	.286	(7.26)
8	6900-1201	6900-1225	6900-1249	.300	(7.62)	.386	(9.80)
10	6900-0001	6900-0049	6900-0106	.400	(10.16)	.486	(12.34)
12	6900-1202	6900-1226	6900-1250	.500	(12.70)	.586	(14.88)
14	6900-1203	6900-1227	6900-1251	.600	(15.24)	.686	(17.42)
16	6900-1204	6900-1228	6900-1252	.700	(17.78)	.786	(19.96)
18	6900-1205	6900-1229	6900-1253	.800	(20.32)	.886	(22.50)
20	6900-0005	6900-0053	6900-0110	.900	(22.86)	.986	(25.04)
22	6900-1206	6900-1230	6900-1254	1.000	(25.40)	1.086	(27.58)
24	6900-1207	6900-1231	6900-1255	1.100	(27.94)	1.186	(30.12)
26	6900-1208	6900-1232	6900-1256	1.200	(30.48)	1.286	(32.66)
28	6900-1209	6900-1233	6900-1257	1.300	(33.02)	1.386	(35.20)
30	6900-0009	6900-0057	6900-0114	1.400	(35.56)	1.486	(37.74)
32	6900-1210	6900-1234	6900-1258	1.500	(38.10)	1.586	(40.28)
34	6900-1211	6900-1235	6900-1259	1.600	(40.64)	1.686	(42.82)
36	6900-1212	6900-1236	6900-1260	1.700	(43.18)	1.786	(45.36)
38	6900-1213	6900-1237	6900-1261	1.800	(45.72)	1.886	(47.90)

SIZE	Part Number			Dimensions			
	Gold Flash	15 μ Gold	30 μ Gold	"A" Dim		"B" Dim	
40	6900-0013	6900-0061	6900-0118	1.900	(48.26)	1.986	(50.44)
42	6900-1214	6900-1238	6900-1262	2.000	(50.80)	2.086	(52.98)
44	6900-1215	6900-1239	6900-1263	2.100	(53.34)	2.186	(55.52)
46	6900-1216	6900-1240	6900-1264	2.200	(55.88)	2.286	(58.06)
48	6900-1217	6900-1241	6900-1265	2.300	(58.42)	2.386	(60.60)
50	6900-0017	6900-0065	6900-0122	2.400	(60.96)	2.486	(63.14)
52	6900-1218	6900-1242	6900-1266	2.500	(63.50)	2.586	(65.68)
54	6900-1219	6900-1243	6900-1267	2.600	(66.04)	2.686	(68.22)
56	6900-1220	6900-1244	6900-1268	2.700	(68.58)	2.786	(70.76)
58	6900-1221	6900-1245	6900-1269	2.800	(71.12)	2.886	(73.30)
60	6900-0021	6900-0069	6900-0126	2.900	(73.66)	2.986	(75.84)
62	6900-2533	6900-2543	6900-2553	3.000	(76.20)	3.086	(78.38)
64	6900-2534	6900-2544	6900-2554	3.100	(78.74)	3.186	(80.92)
66	6900-2535	6900-2545	6900-2555	3.200	(81.28)	3.286	(83.46)
68	6900-2536	6900-2546	6900-2556	3.300	(83.82)	3.386	(86.00)
70	6900-2537	6900-2547	6900-2557	3.400	(86.36)	3.486	(88.54)
72	6900-2538	6900-2548	6900-2558	3.500	(88.90)	3.586	(91.08)
74	6900-2539	6900-2549	6900-2559	3.600	(91.44)	3.686	(93.62)
76	6900-2540	6900-2550	6900-2560	3.700	(93.98)	3.786	(96.16)
78	6900-2541	6900-2551	6900-2561	3.800	(96.52)	3.886	(98.70)
80	6900-2542	6900-2552	6900-2562	3.900	(99.06)	3.986	(101.24)

9011185 0000065 824

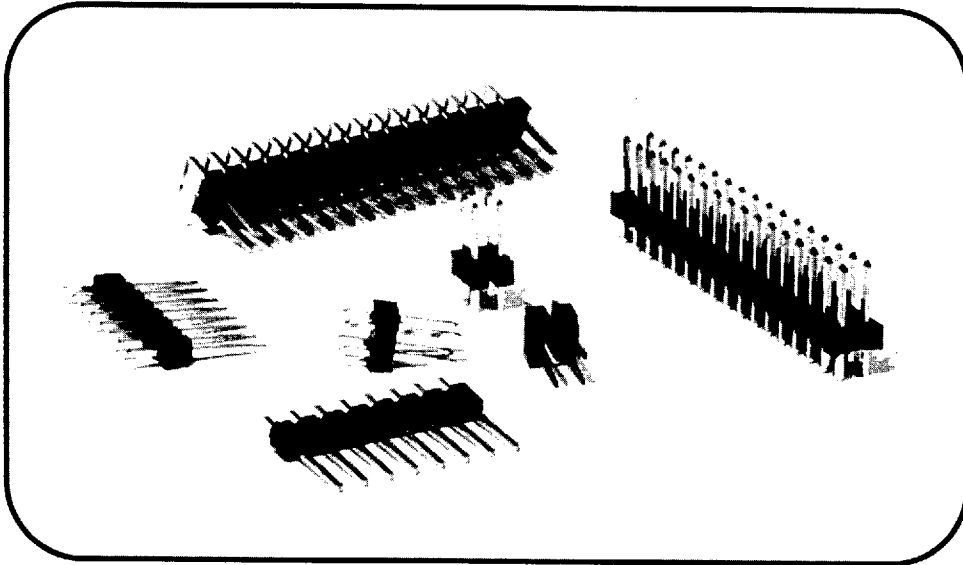

FEATURES:

.100 CENTERS WITH .240 MATING LENGTH PINS

AVAILABLE IN VERTICAL AND RIGHT ANGLE STYLES

"BREAK-AWAY" STYLES IN SINGLE ROW, UP TO 36 PINS OR DUAL ROW UP TO 80 PINS.

HEADERS CAN BE BROKEN TO SMALLER SIZES, WHICH REDUCES YOUR INVENTORY NEEDS.

FULLY SHROUDED HEADERS PROVIDE MATING ALIGNMENT AND PIN PROTECTION.

STANDOFFS FOR EASY FLUX REMOVAL

SPECIFICATIONS:

MATERIALS:

INSULATOR: GLASS FILLED POLYSETER, UL 94V-0, BLACK
CONTACTS: PHOSPHOR BRONZE

ELECTRICAL:

CURRENT RATING: 3 AMPERES
DIELECTRIC WITHSTANDING VOLTAGE: 500 VAC
INSULATION RESISTANCE: 1000 MEGOHMS MIN.

ENVIRONMENTAL:

TEMPERATURE RANGE: -55°C TO +105°C

NOTE: WILL WITHSTAND THE TEMPERATURES ASSOCIATED WITH HAND OR WAVE SOLDERING.

■ 9011185 0000059 520 ■