

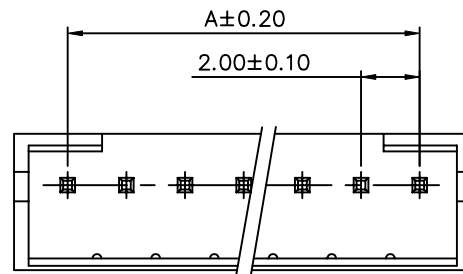
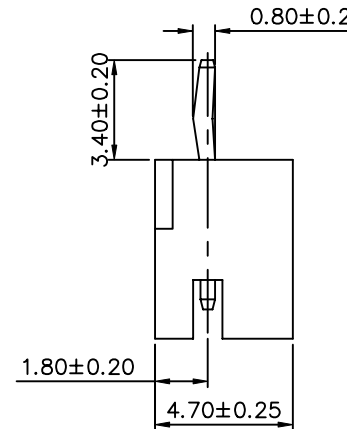


SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 100V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megohms Min.
 Withstanding Voltage: 800V AC/Minute
 Pin Material: Brass/Tin-Plated
 Material: Nylon 66,UL 94V-0
 RoHS Compliant

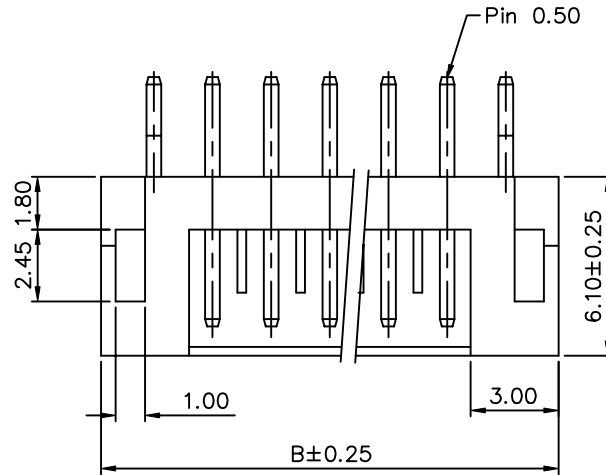

P.C.B Layout

Circuits	Dim.A	Dim.B
2	2.00	6.00
3	4.00	8.00
4	6.00	10.00
5	8.00	12.00
6	10.00	14.00
7	12.00	16.00
8	14.00	18.00
9	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00
16	30.00	34.00

AUK A MEMBER OF AUK GROUP
太聯事業股份有限公司
AUK CONTRACTORS CO., LTD.

CATEGORY		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE				
PART No.	ILSXXD-H	MEI	BECKY		.X ±0.38			
DRAWING No.	ILSXXD-H	DRAWING BY	TCF	.XX ±0.25				
SCALE	NONE	REV.	A0	ANG.				
				UNIT mm	△ A0	NEW RELEASE	BECKY	2004/10/07
					NO. REV.	REVISIONS	CHK	DATE