


Pin Header 3,00 mm

Series

704




Rated current	5,0 A
Rated voltage	250 V _{RMS} / V _{DC}
Withstand voltage	1500 V _{RMS} for one minute
Material contact	Phosphor bronze
Material insulator	High temp. thermoplast UL94V-0
Operating temperature	-25°C to +85°C
Max. processing temper.	260°C for 10 seconds

pitch	3,00
termination	
contact size	<input type="checkbox"/> 0,64
max. pincount	024


All dimensions in mm.

Variation

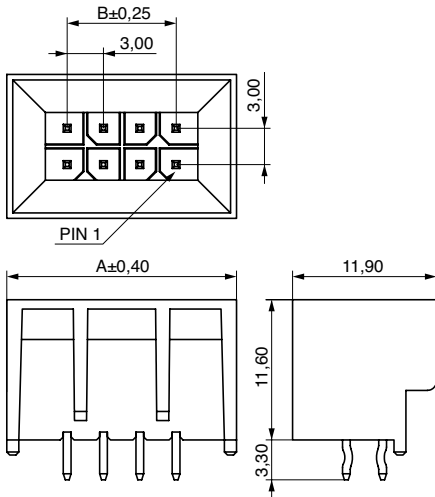


1

PCB Layout



no. of pins	see figure left	see figure left
n	A	B
004	7,62	5,00
006	7,62	7,60
008	7,62	10,10
010	5,08	12,60
012	7,62	12,60
014	7,62	15,20
016	7,62	17,70
018	7,62	20,30
020	7,62	22,80
022	7,62	25,30
024	10,16	25,40

Positioning peg: 1 = With peg
 Plating: T = Sn



www.mpe-connector.de

Order code:

704-1-1-1-1-T-B S0

Mating series

703

Product group
3