
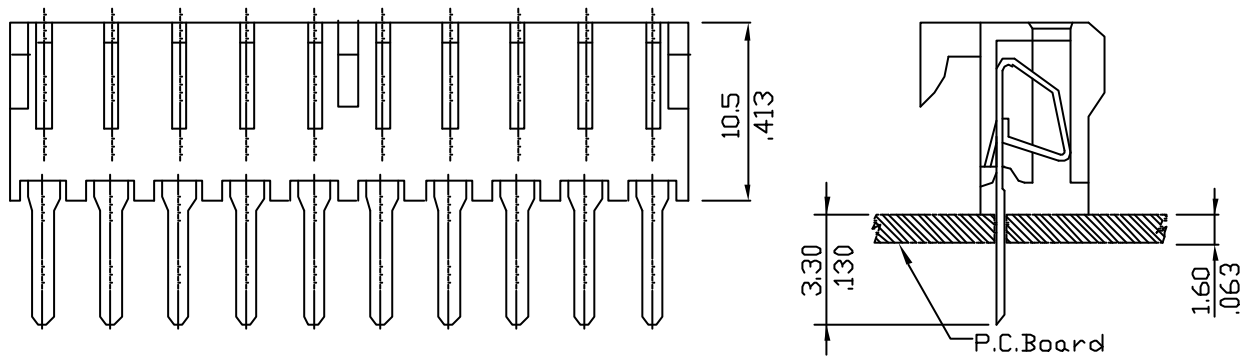


Material :

* Insulator : UL 94V-2 Nylon 6/6

* Contact : Brass

* Plating : Tin

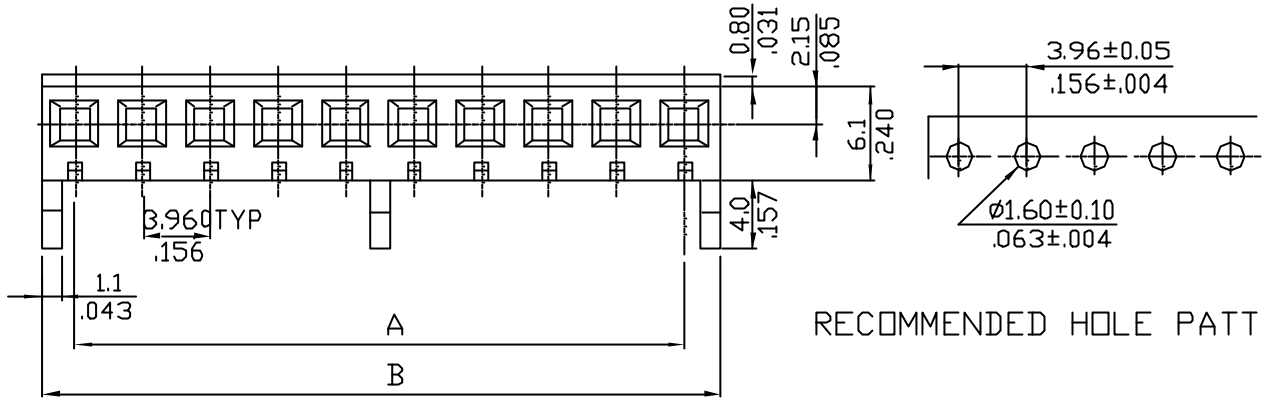

CIRCUITS	PART NO.	DIM. A	DIM. B	CIRCUITS	PART NO.	DIM. A	DIM. B
2	3963S02V000	3.960(.156)	7.80(.307)	9	3963S09V000	31.680(1.248)	35.50(1.398)
3	3963S03V000	7.920(.312)	11.80(.465)	10	3963S10V000	35.640(1.403)	39.50(1.555)
4	3963S04V000	11.880(.468)	15.70(.618)	11	3963S11V000	39.600(1.560)	43.50(1.713)
5	3963S05V000	15.840(.624)	19.70(.776)	12	3963S12V000	43.560(1.716)	47.40(1.866)
6	3963S06V000	19.800(.780)	23.60(.929)	13	3963S13V000	47.520(1.871)	51.40(2.024)
7	3963S07V000	23.760(.936)	27.60(1.087)	14	3963S14V000	51.480(2.027)	55.30(2.177)
8	3963S08V000	27.720(1.091)	31.60(1.244)	15	3963S15V000	55.440(2.183)	59.30(2.335)

				LEOCO CORPORATION		APPROVED:		PART NO.:						
				GENERAL TOLERANCE		DATE:		3963S**V000						
				X. ±		X. ± 2'		CHECKED:		TITLE:				
				.X ± $\frac{0.30}{.012}$.X ± 1'		DATE:		3.96mm PCB Connector				
				.XX ± $\frac{0.20}{.008}$.XX ± 0.5'		DRAWN:		DRAWING NO.:				
				.XXX ± $\frac{0.10}{.004}$.XXX ± 0.1'		DATE:		396301S				
A	DWG REL									UNITS	SCALE	SIZE	SHEET	REV.
REV.	ECO. NO.	CHG.	APP.							$\frac{mm}{Inch}$	~	A4	1/1	A