


NOT RECOMMENDED FOR  
NEW DESIGNS, USE SB3X0 SERIES

### Features

- Low Forward Drop
- High Surge Current Capacity
- Guard Ring for Transient Protection
- Low Power Loss, High Efficiency

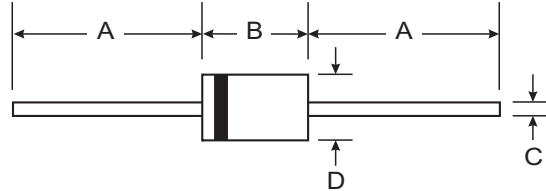

### Mechanical Data

- Case: DO-201AD, Molded Plastic
- Plastic Package: UL Flammability Classification Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Axial lead, Solderable per MIL-STD-202, Method 208
- Polarity: Cathode band
- Weight: 1.2 grams (approx.)

DO-201AD		
Dim	Min	Max
A	25.40	—
B	7.20	9.50
C	1.20	1.30
D	4.80	5.30
All Dimensions in mm		

### Maximum Ratings and Electrical Characteristics @ T<sub>A</sub> = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

Characteristic	Symbol	SR302	SR303	SR304	SR305	SR306	Unit
Peak Repetitive Reverse Voltage	V <sub>RRM</sub>						
Working Peak Reverse Voltage	V <sub>RWM</sub>	20	30	40	50	60	V
DC Blocking Voltage	V <sub>R</sub>						
RMS Reverse Voltage	V <sub>R(RMS)</sub>	14	21	28	35	42	V
Average Rectified Output Current (Note 1)	I <sub>O</sub>		3.0			3.0	A
			—				
Non-repetitive Peak Forward Surge Current 8.3ms half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>		80				A
Forward Voltage @ I <sub>F</sub> = 3.0A	V <sub>F</sub>		0.55		0.72		V
Peak Reverse Current at @ T <sub>A</sub> = 25°C	I <sub>R</sub>			1.0			mA
Rated DC Blocking Voltage @ T <sub>A</sub> = 100°C				20			
Typical Thermal Resistance (Note 2)	R <sub>θJA</sub>		20				°C/W
Typical Total Capacitance (Note 3)	C <sub>T</sub>		300				pF
Operating and Storage Temperature Range	T <sub>J</sub> , T <sub>STG</sub>		-65 to +150				°C

- Notes:
1. Lead Temperature T<sub>L</sub> measured 9.5mm lead length from body.
  2. Thermal Resistance from Junction to Ambient Vertical PC Board Mounting, 1.27mm Lead Length.
  3. Measured at 1.0MHz and applied reverse voltage of 4.0V.

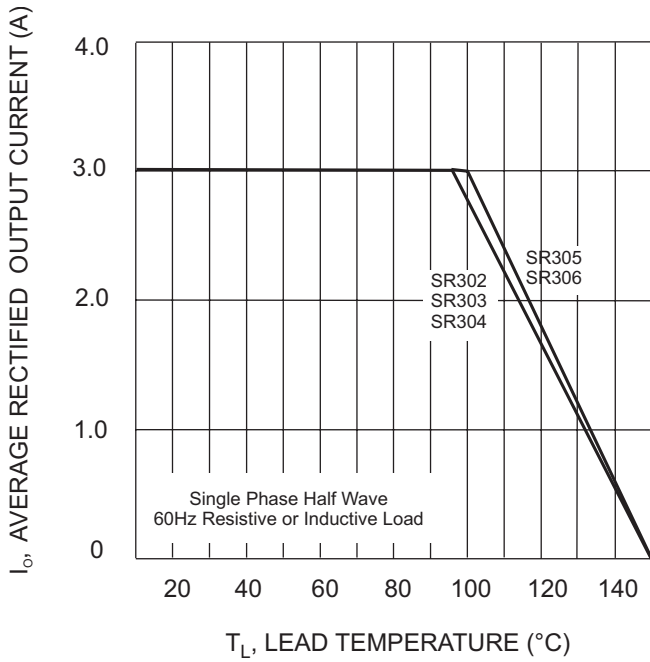


Fig. 1, Forward Current Derating Curve

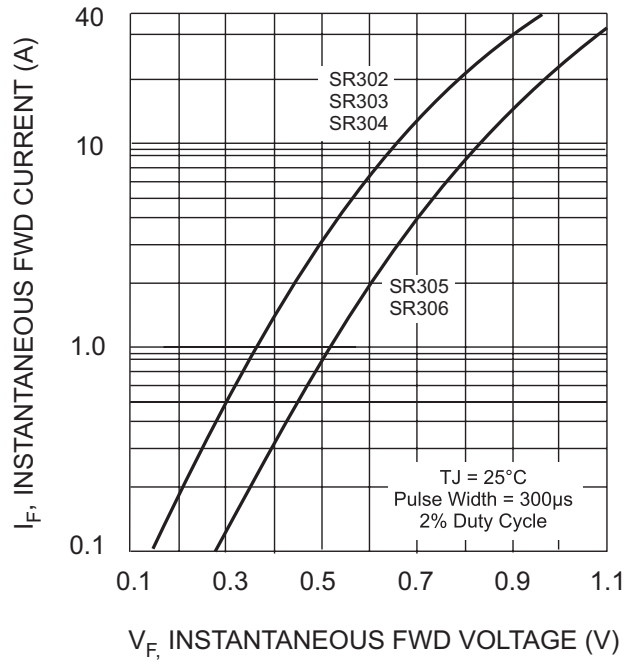


Fig. 2, Typical Forward Characteristics

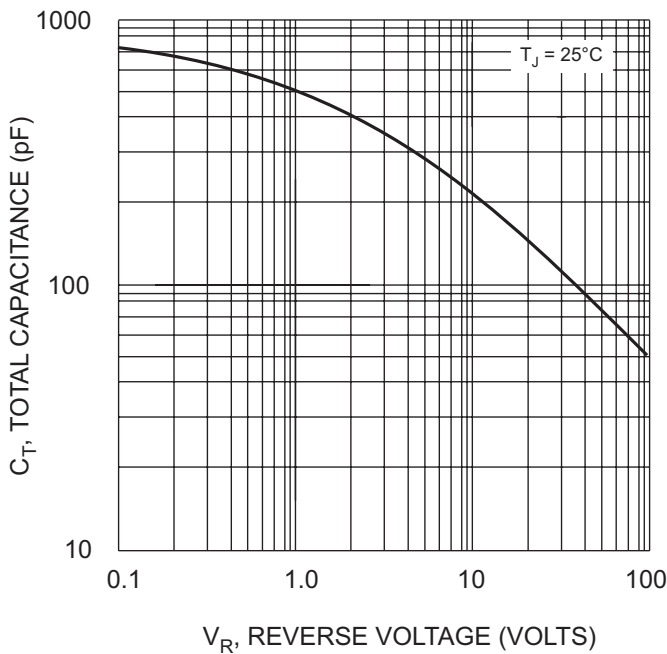


Fig. 3, Typical Total Capacitance

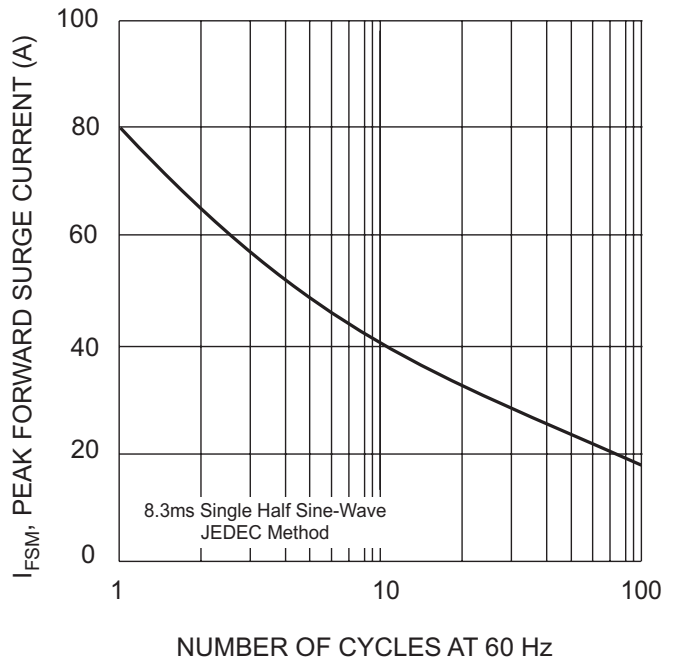


Fig. 4, Max Non-Repetitive Peak Fwd Surge Current

**IMPORTANT NOTICE**

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

**LIFE SUPPORT**

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.