



MP Series Panel Mount Assemblies




MPC3 SERIES Chrome Panel Mount

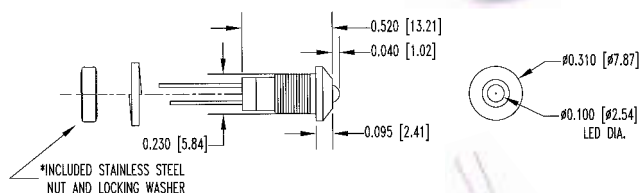


MPR3 SERIES Chrome Panel Mount

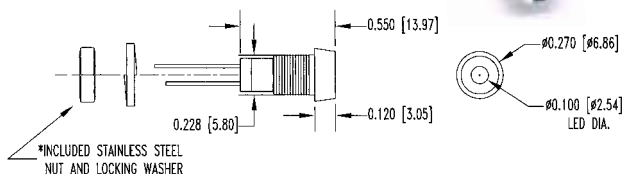

MPC5 SERIES Chrome Panel Mount

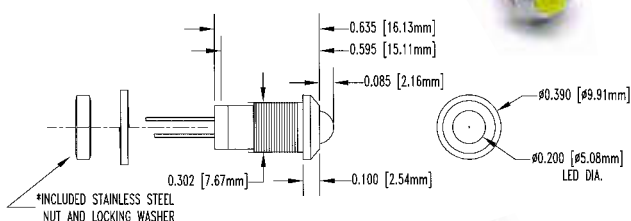

MPR5 SERIES Chrome Panel Mount

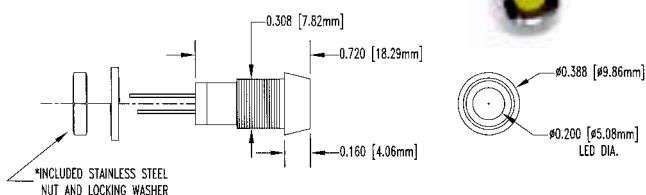

- ◆ High Quality Nickel-Plated Brass Housings
- ◆ Enhanced Viewing Angles With Reflector Use
- ◆ Daylight Visible Available
- ◆ Wide Variety Of Connectors And Flying Leads Available (Subject To Special Quotation)
- ◆ All Necessary Stainless Steel Mounting Hardware Provided

Mounting Information:

MPx3 Series: 0.235 [5.97mm] +0.003 [0.08mm]/-0.002 [0.05mm]
 MPx5 Series: 0.315 [8.00mm] +0.003 [0.08mm]/-0.002 [0.05mm]
 Panel Thickness: 0.047 [1.2mm] to 0.250 [6.35mm]

Material Specifications:

Housing: Nickel-plated brass housing
 Optional Wire Leads: 24AWG UL 1007 Cathode-Black, Anode-Red

Application Notes:

Wire leads from 2.5" to 48" are available subject to special quotation. Please consult Bivar at 1-800-SPACERS for additional information.

Many connectors are available as well as customer specified connectors. Subject to quotation

Ordering Information:

MPR	5	G	D	5V	W6	-CC
Series	Size	Color	Lens	Special	Leads	Options
Size:	3	3mm LED				
	5	5mm LED				

Color: Please see Chart

Color Options and Suffixes:

Suffix	Color	Peak (nm)	Typ. Vf
G	Green	565nm	2.0
H	High Efficiency Red	635nm	2.0
Y	Yellow	585nm	2.0
SR	Super Red	660nm	2.0
O	Orange	635nm	2.0
A	Amber	610nm	2.0
BW	Blue	430nm	3.5
BC	Red/Green Bi-Color	635/565	2.0

Lens Choices:

- D** Color Diffused
- C** Water Clear
- T** Tinted Non-diffused

Please Note that all BC LEDs come with white diffused lens.

Special:

- L** 2mA Low Current
- 5V** 5 Volt Integrated Resistor
- 12V** 12 Volt Integrated Resistor

Leads:

- "Blank"** Terminal Leads
- Wx** 24AWG Wire Leads (Replace the "X" with the length in inches)

Options:

- CC** Standard 0.100" [2.54mm] pitch header connector
- CC2** Miniature 0.079" [2.00mm] pitch header connector