


# WW 250 CONNECTOR SYSTEM


.098" (2.5mm) pitch wire-to-board type

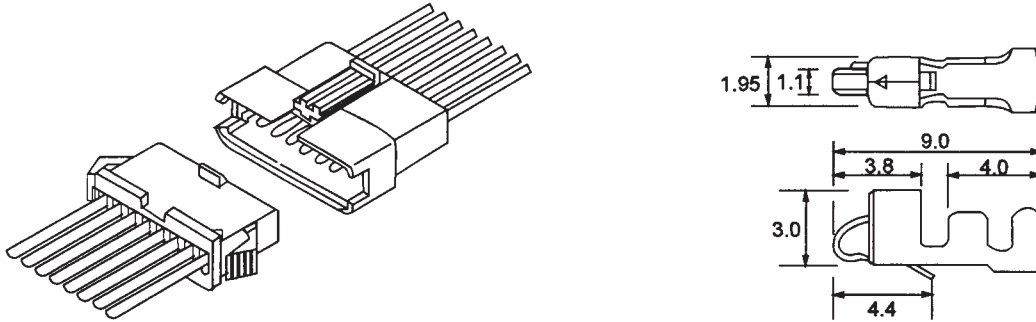

PART NO.	WIRE RANGE		MATERIAL/	THICKNESS	INSULATION	REEL
	AWG#	mm <sup>2</sup>	FINISH	mm	O.D.(mm)	PCS
WW250-FT	22-28	0.33-0.08	BRASS/TIN	0.20	1.8-1.2	7000

## WW250-M SERIES HOUSING



MATERIAL : NYLON 66 UL 94V-0  
 ACCEPT WW250-FT TERMINAL  
 MATE WITH WW250-F SERIES HOUSING  
 CURRENT RATING : 3A AC,DC  
 VOLTAGE RATING : 250V AC,DC  
 CONTACT RESISTANCE : 20m Ω MAX  
 INSULATION RESISTANCE : 500M Ω MIN  
 WITHSTANDING VOLTAGE : 1000V AC/MINUTE  
 TEMPERATURE RANGE : -25°C TO +85°C

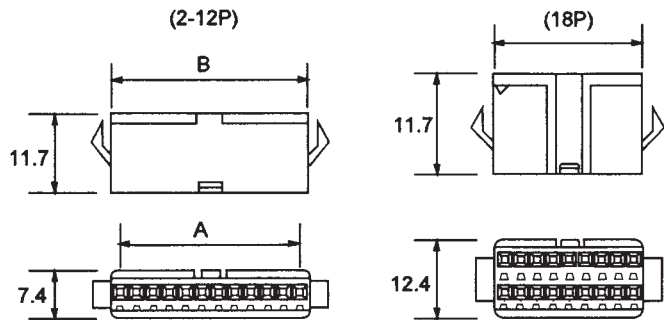

POLES	PART NO.	DIMENSIONS (mm)		POLES	PART NO.	DIMENSIONS (mm)	
		A	B			A	B
2	WW250-M02	2.50	5.50	8	WW250-M08	17.50	20.50
3	WW250-M03	5.00	8.00	9	WW250-M09	20.00	23.00
4	WW250-M04	7.50	10.50	10	WW250-M10	22.50	25.50
5	WW250-M05	10.00	13.00	11	WW250-M11	25.50	28.00
6	WW250-M06	12.50	15.50	12	WW250-M12	27.50	30.50
7	WW250-M07	15.00	18.00	18	WW250-M18	20.00	23.00

# WW 250 CONNECTOR SYSTEM


.098" (2.5mm) pitch wire-to-board type

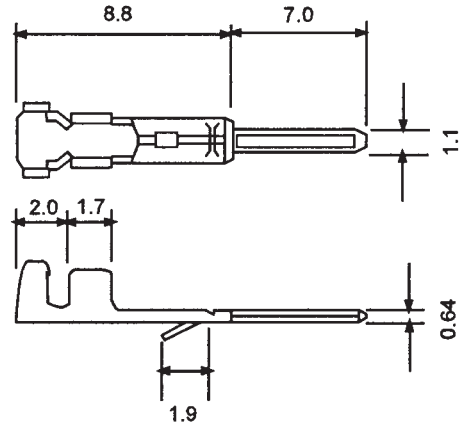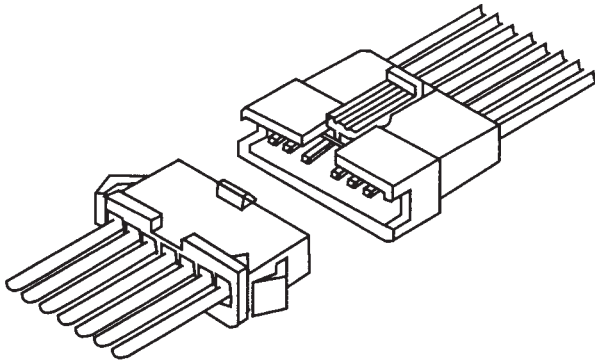

PART NO.	WIRE RANGE		MATERIAL/	THICKNESS	INSULATION	REEL
	AWG#	mm <sup>2</sup>	FINISH	mm	O.D.(mm)	PCS
WW250-MT	22-28	0.33-0.08	BRASS/TIN	0.20	1.8-1.2	7000

## WW250-F SERIES HOUSING

MATERIAL : NYLON 66 UL 94V-0  
 ACCEPT WW250-MT TERMINAL  
 MATE WITH WW250-M SERIES HOUSING  
 CURRENT RATING : 3A AC,DC  
 VOLTAGE RATING : 250V AC,DC  
 CONTACT RESISTANCE : 20m Ω MAX  
 INSULATION RESISTANCE : 500M Ω MIN  
 WITHSTANDING VOLTAGE : 1000V AC/MINUTE  
 TEMPERATURE RANGE : -25°C TO +85°C

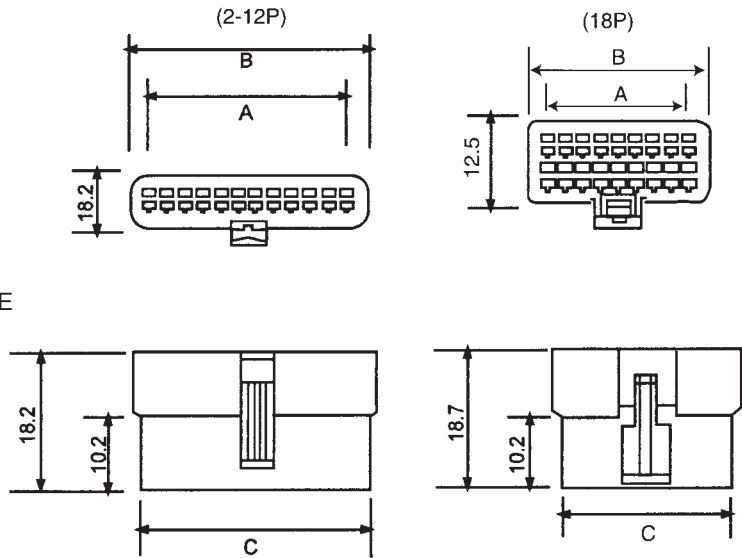

POLES	PART NO.	DIMENSIONS (mm)			POLES	PART NO.	DIMENSIONS (mm)		
		A	B	C			A	B	C
2	WW250-F02	2.50	8.00	5.50	8	WW250-F08	17.50	23.00	20.50
3	WW250-F03	5.00	10.50	8.00	9	WW250-F09	20.00	25.50	23.00
4	WW250-F04	7.50	13.00	10.50	10	WW250-F10	22.50	28.00	25.50
5	WW250-F05	10.00	15.50	13.00	11	WW250-F11	25.50	30.50	28.00
6	WW250-F06	12.50	18.00	15.50	12	WW250-F12	27.50	33.00	30.50
7	WW250-F07	15.00	20.50	18.00	18	WW250-F18	22.00	25.50	23.00