

1.27mm × 1.27mm (0.05" × 0.05") Pin Header

Dual Row 06 to 100 Contacts
For Square Post Mating


0057D Series

APPLICATION AND FEATURES

1. Side stackable (on unbroken edges).
2. Variable pin length, gold or tin plated.
3. Standoffs facilitate post solder cleaning.
4. Mates with P.C.Board connectors such as 0055D & 0086D series.

SPECIFICATIONS

Current Rating: 1 Amp
 Insulator resistance: 5000 Megohms min.
 Dielectric withstanding: AC 500 V
 Operating Temperature: -40° to +105°C
 Max Processing Temp: 230° for 30~60 seconds
 (260° for 10 seconds)
 Contact Material: Phosphor bronze
 Insulator Material: Polyester, UL 94V-0
 ©Standard: L.C.P

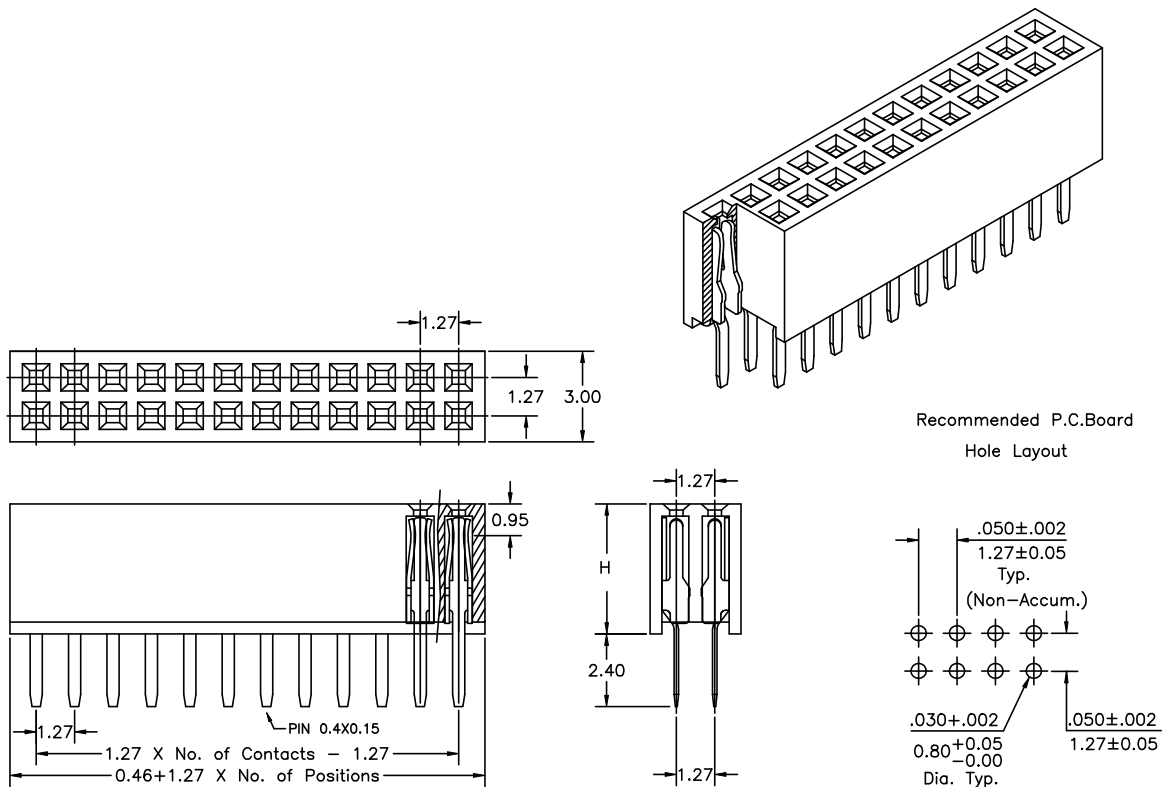

Order Information 0057D Series

Example: 0057D-20-S1-02

Series No.	Number of Contacts	Connector Type	Contact Plating
0057D	06 to 100 Contacts	Height : "H"	Tin Plated 01
		3.4mm Base S1	Gold Plated
		4.3mm Base S2	Flash 02
			10 μ" 10
			30 μ" 30