


PIN HEADER 2,54mm
ID: 088


STL 1-XXXXA / STL 2-XXXXA / STL 3-XXXXA

Series 400

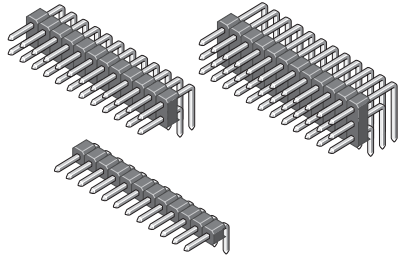

TECHNICAL DATA

Pitch	2,54 mm
Insulating Material	high temp. thermoplast UL94V-0
Contact Material	copper alloy
Rated Current	3 Amp.
Rated Voltage	250 V _{AC/DC}
Withstanding Voltage	1000 V _{AC} for one minute
Operating Temperature	-40°C to +105°C
Maximum Soldering Temperature	230°C for 30-60 seconds 260°C for 10 seconds

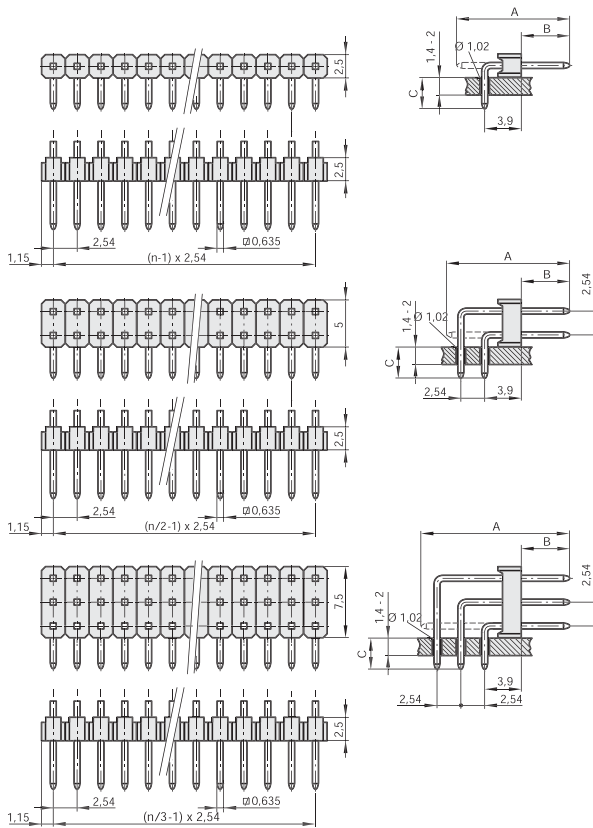

Code	Dimensions		
	A	B	C
1130	11,30	3,50	3,30
1260	12,60	4,80	3,30
1390	13,90	6,10	3,30
1470	14,70	6,90	3,30
1770	17,70	9,90	3,30
1980	19,80	12,00	3,30
2160	21,60	13,80	3,30
2280	22,80	15,00	3,30
2490	24,90	17,10	3,30
Custom			

All dimensions in mm.
Other dimensions upon request.

STL X - XXXX A XX - XXX U

Rows: 1 = 1 rows
2 = 2 rows
3 = 3 rows

Code: see table

A: right angled contacts

Plating: TT = Sn
GT = Sel. Au
GG = Au

U: RoHS-compliant with high temp. plastic

Pins: 1 row: 1 - 50 contacts
2 rows: 2 - 100 contacts
3 rows: 3 - 120 contacts

7 | 2,54 mm