






2.0mm WAFER RIGHT ANGLE / STRAIGHT TYPE



SPECIFICATIONS

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66,UL94V-0
Pantone Color: 7528C

PART NO.	Dimensions	
	A	B
2004R-202TW-L	2.00	6.00
2004R-203TW-L	4.00	8.00
2004R-204TW-L	6.00	10.00
2004R-205TW-L	8.00	12.00
2004R-206TW-L	10.00	14.00
2004R-207TW-L	12.00	16.00
2004R-208TW-L	14.00	18.00
2004R-209TW-L	16.00	20.00
2004R-210TW-L	18.00	22.00
2004R-211TW-L	20.00	24.00
2004R-212TW-L	22.00	26.00
2004R-213TW-L	24.00	28.00
2004R-214TW-L	26.00	30.00
2004R-215TW-L	28.00	32.00
2004R-216TW-L	30.00	34.00
2004R-217TW-L	32.00	36.00
2004R-218TW-L	34.00	38.00
2004R-219TW-L	36.00	40.00
2004R-220TW-L	38.00	42.00

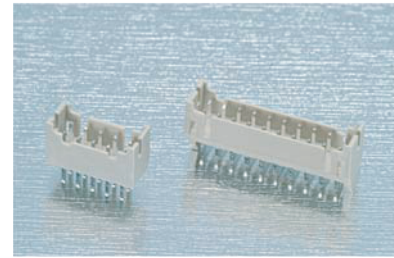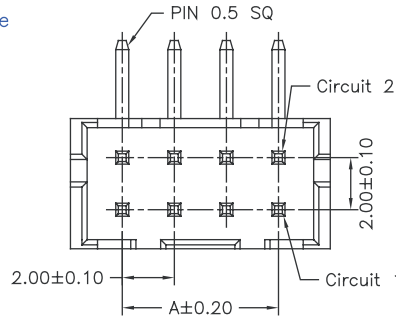

P.C.B LAYOUT

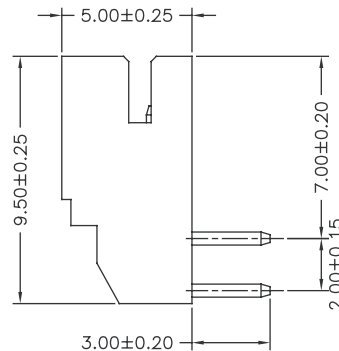



Part No.:2004R-2XXTW-L



SPECIFICATIONS

Current Rating: 2A AC,DC
Voltage Rating: 250V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max.
Insulation Resistance: 1000MΩ Min.
Withstanding Voltage: 800V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66,UL94V-0
Pantone Color: 7528C

PART NO.	Dimensions	
	A	B
2004S-202TW-L	2.00	6.00
2004S-203TW-L	4.00	8.00
2004S-204TW-L	6.00	10.00
2004S-205TW-L	8.00	12.00
2004S-206TW-L	10.00	14.00
2004S-207TW-L	12.00	16.00
2004S-208TW-L	14.00	18.00
2004S-209TW-L	16.00	20.00
2004S-210TW-L	18.00	22.00
2004S-211TW-L	20.00	24.00
2004S-212TW-L	22.00	26.00
2004S-213TW-L	24.00	28.00
2004S-214TW-L	26.00	30.00
2004S-215TW-L	28.00	32.00
2004S-216TW-L	30.00	34.00
2004S-217TW-L	32.00	36.00
2004S-218TW-L	34.00	38.00
2004S-219TW-L	36.00	40.00
2004S-220TW-L	38.00	42.00

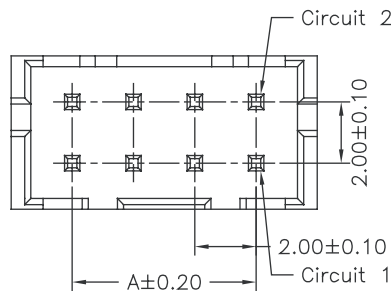

P.C.B LAYOUT

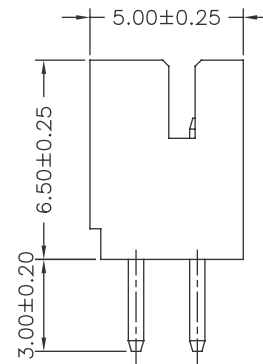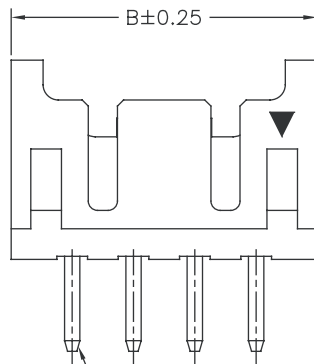

Part No.:2004S-2XXTW-L