


# Schottky Or'ing Diode FST8115, FST8120

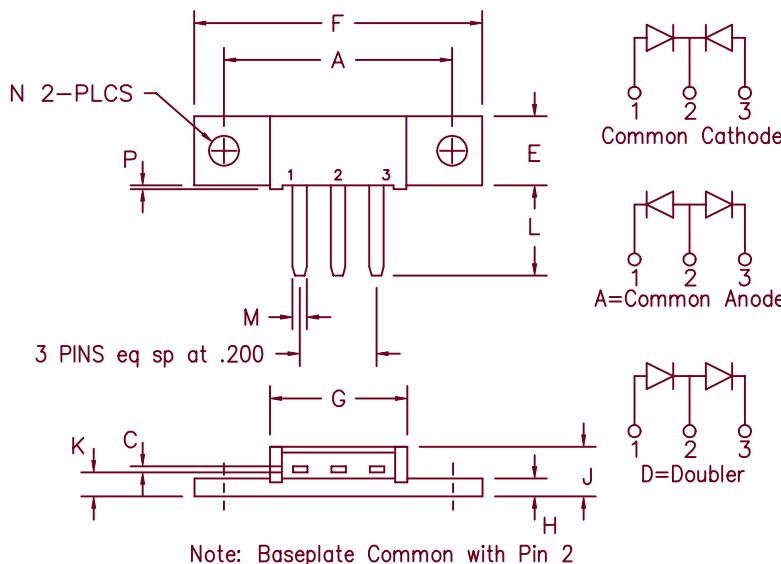

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	1.180	1.195	29.97	30.35	
C	.027	.037	0.69	0.94	
E	.350	.370	8.89	9.40	
F	1.490	1.510	37.85	38.35	
G	.695	.715	17.65	18.16	
H	.088	.098	2.24	2.49	
J	.240	.260	6.10	6.60	
K	.115	.135	2.92	3.43	
L	.460	.480	11.68	12.19	
M	.065	.085	1.65	2.16	
N	.151	.161	3.84	4.09	
P	.015	.025	0.38	0.64	Dia.

Microsemi Catalog Number	Industry Part Number	Working Reverse Voltage	Peak Reverse Voltage
FST8115*	85CNQ015	15V	15V
FST8120*	85CNQ020	20V	20V

\*Add the Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard ring protection
- Common cathode center tap
- 2X40 Amperes avg.
- 125°C Junction temperature
- Reverse energy tested
- Low forward voltage

## Electrical Characteristics

Average forward current per pkg  
 Average forward current per leg  
 Maximum surge current per leg  
 Max repetitive peak reverse current per leg  
 Max peak forward voltage per leg  
 Max peak forward voltage per leg  
 Max peak reverse current per leg  
 Max peak reverse current per leg  
 Typical junction capacitance per leg

I<sub>F(AV)</sub> 80 Amps  
 I<sub>F(AV)</sub> 40 Amps  
 I<sub>FSM</sub> 800 Amps  
 I<sub>R(OV)</sub> 2 Amps  
 V<sub>FM</sub> 0.32 Volts  
 V<sub>FM</sub> 0.44 Volts  
 I<sub>RM</sub> 1.0 Amp  
 I<sub>RM</sub> 10 mA  
 C<sub>J</sub> 4000 pF

T<sub>C</sub> = 107°C, Square wave, R<sub>θJC</sub> = 0.5°C/W  
 T<sub>C</sub> = 107°C, Square wave, R<sub>θJC</sub> = 1.0°C/W  
 8.3 ms, half sine, T<sub>J</sub> = 125°C  
 f = 1 KHZ, 25°C, 1 μsec square wave  
 I<sub>FM</sub> = 40A: T<sub>J</sub> = 125°C  
 I<sub>FM</sub> = 40A: T<sub>J</sub> = 25°C \*  
 V<sub>RRM</sub>, T<sub>J</sub> = 125°C \*  
 V<sub>RRM</sub>, T<sub>J</sub> = 25°C  
 V<sub>R</sub> = 5.0V, T<sub>C</sub> = 25°C

\*Pulse test: Pulse width 300 μsec, Duty cycle 2%

## Thermal and Mechanical Characteristics

Storage temp range	T <sub>STG</sub>	-55°C to 125°C
Operating junction temp range	T <sub>J</sub>	-55°C to 125°C
Max thermal resistance per leg	R <sub>θJC</sub>	1.0°C/W Junction to case
Max thermal resistance per pkg	R <sub>θJC</sub>	0.5°C/W Junction to case
Typical thermal resistance (greased)	R <sub>θCS</sub>	0.3°C/W Case to sink
Mounting Base Torque		10 inch pounds maximum
Weight		0.3 ounce (8.4 grams) typical

# FST8115, FST8120

Figure 1  
Typical Forward Characteristics – Per Leg

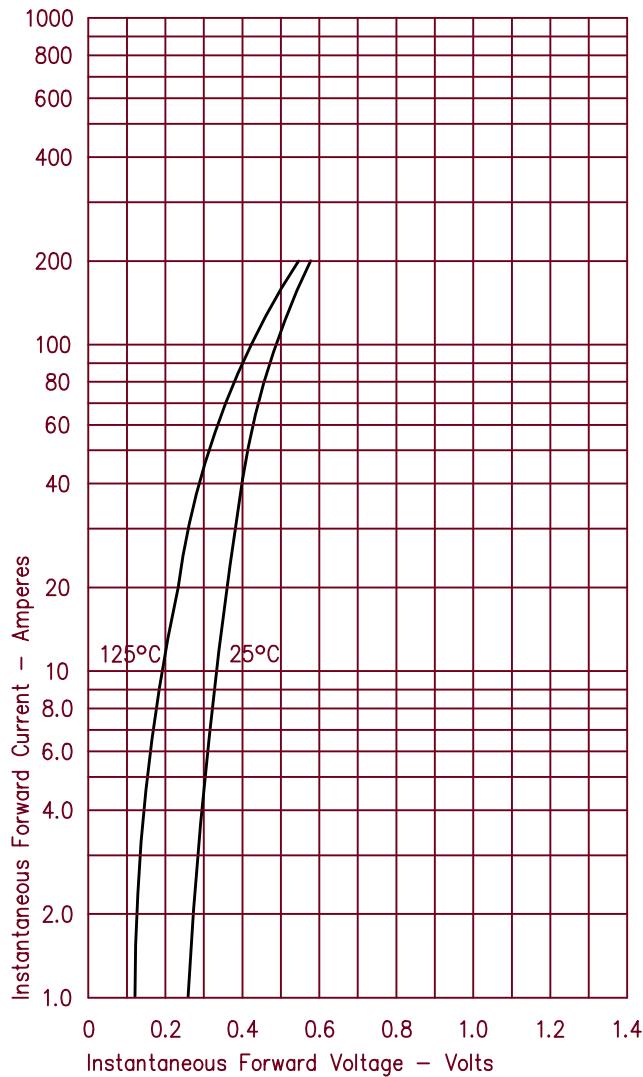


Figure 2  
Typical Reverse Characteristics – Per Leg

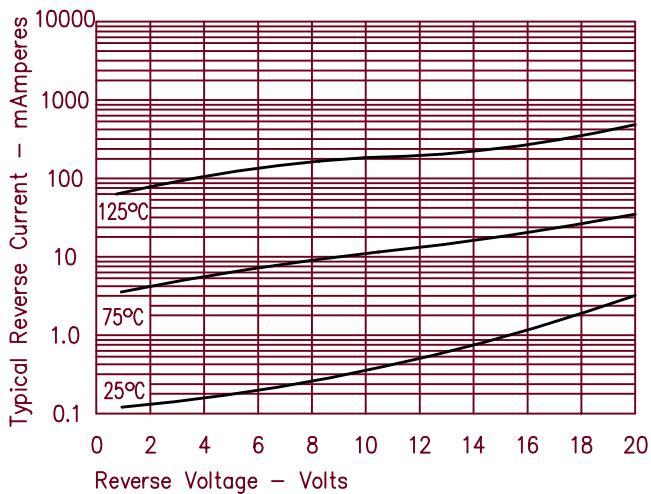


Figure 3  
Typical Junction Capacitance – Per Leg

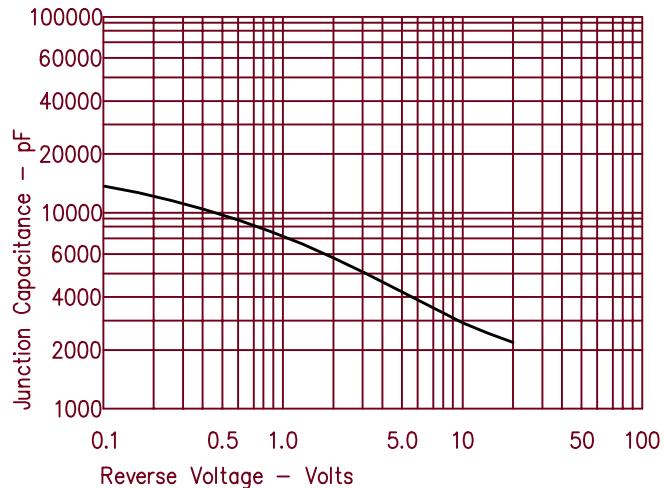


Figure 4  
Forward Current Derating – Per Leg

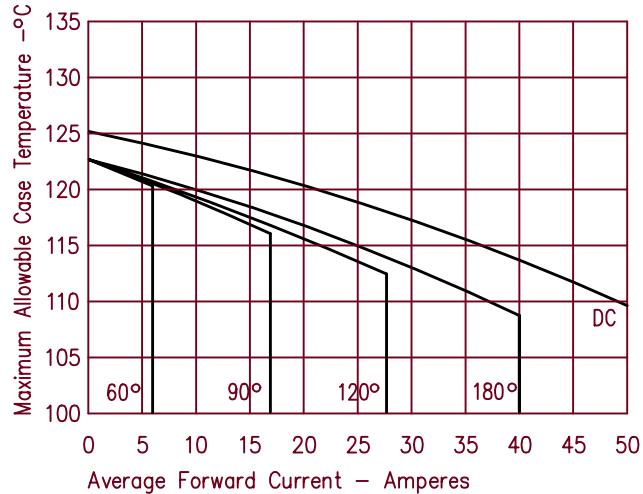


Figure 5  
Maximum Forward Power Dissipation – Per Leg

